


PART No.	CARTON	BAG
02800002Z	580521	890-990
02800002ZXA	580509	N/A

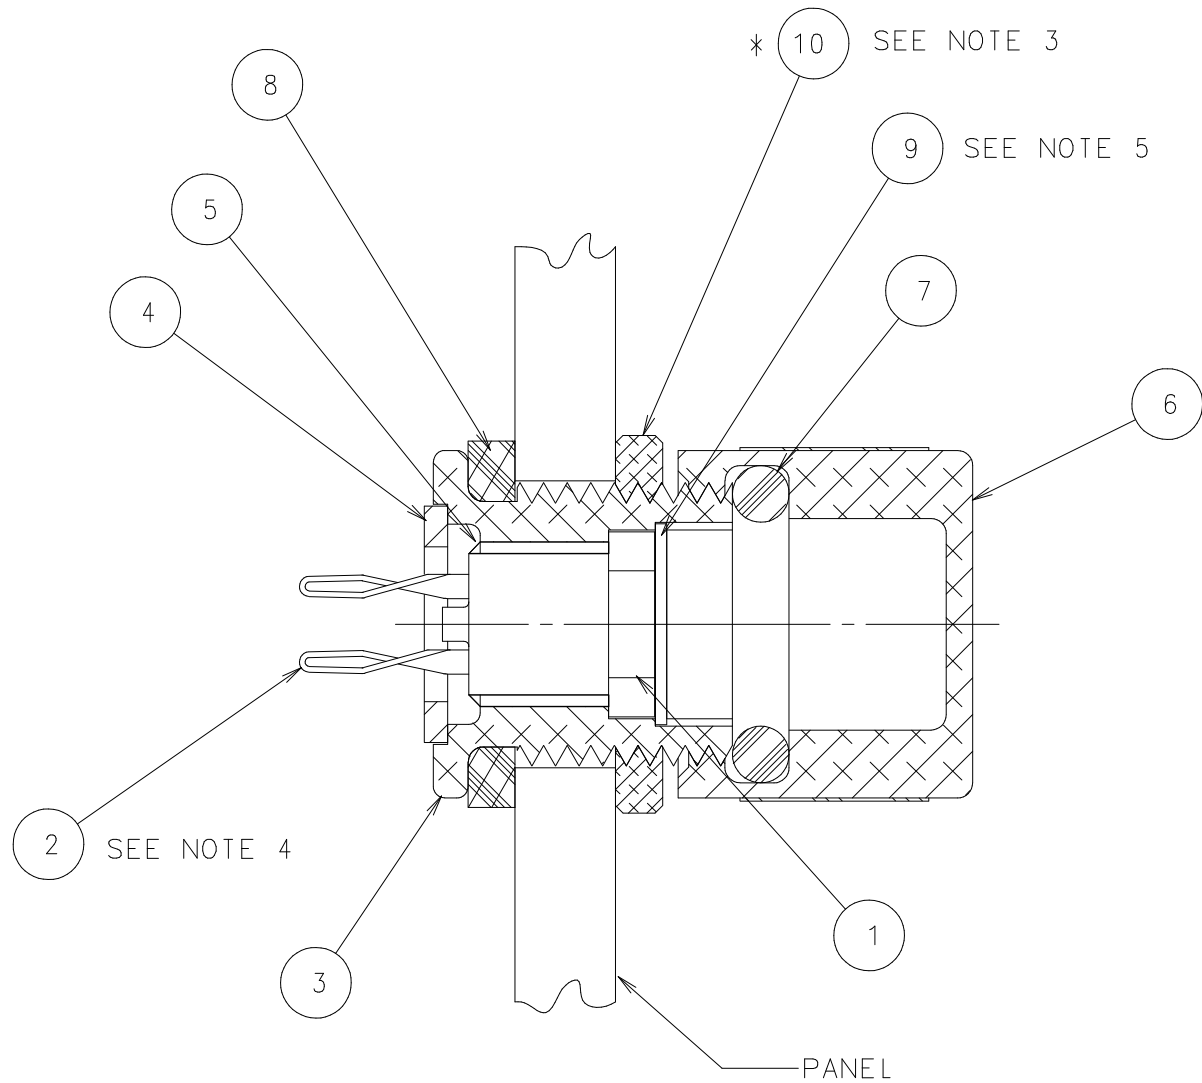

BACK PANEL MOUNTING

NOTE:

1. FINAL ASSEMBLY MUST BE CAPABLE OF ACCEPTING A L.F. MICROFUSE.
2. WHEN INSPECTED AS A FINAL ASSEMBLY ALL NOTES AND CRITICAL DIM'S FROM PIECE PART AND SUB-ASS'Y DRAWINGS APPLY.
3. * = WHEN REQUIRED THIS PART WILL BE ASSEMBLED AND SUFFIX "A" ADDED TO THE CATALOG No.
4. TWIST TERMINALS 90° AT BASE BEFORE SPREADING.
5. ADD SMALL AMOUNT OF ADHESIVE 087232 AROUND DISC PERIMETER AFTER ASSEMBLY (REF. STD. #095088)

PACKAGING NOTES:

PACK 150 FUSE POSTS PER CARTON (SEE CHART)
- CUT FOAM 580219 INTO (6) PIECES APPROX. 4 x 8
PLACE 2 PIECES IN BOTTOM OF CARTON AND
INSERT PARTITION ASSEMBLY 580278.
- PLACE ONE FUSE POSTS IN EACH CELL (50 TOTAL).
- PLACE FOAM ON TOP OF PARTITION ASSEMBLY.
- REPEAT FOR (2) ADDITIONAL LAYERS,
50 PER LAYER/3 LAYERS = 150 TOTAL.
- FOR UNASSEMBLED VERSIONS PLACE HARDWARE IN
BAG 890-990 AND PLACE ALONG END OF PARTITIONS.
LABEL WITH 914-529 USING SAP BAR/ONE SYSTEM
RAGS-4 AS SHOWN PER GENERAL SPEC. LABEL LS-000033.

02800002Z

QTY: 150
ACS MICRO FUSE HLDR 2A
CAT.NO. 02800002

(1P)PART NO: 02800002Z

(01)QTY: 150

(1T)LOT NO:333333333333

COUNTRY OF ORIGIN MEXICO

DATE CODE: 01/10/05
(MM/DD/YY)

LTR		DATE	REVISION	CHK	APD
V	10/24/02	82332C- REVISE & REDRAWN ON NEW FORMAT JMB			
W	11/01/06	85090C-CHG PKG NOTES & 914-020 TO 914-529 PJM			
Y	06/26/07	85522D ADD GRAPHICS LABEL RP			

--	914-529	LABEL	6.700	EAD
--	SEE CHART	BAG	6.700	EAD
--	SEE CHART	CARTON	6.700	EAD
--	580278	PARTITION	20.100	EAD
--	580219	FOAM	6.700	EAD
10	903-060	NUT	1000	EA
9	901-251	ORIENTATION DISC	1000	EA
8	901-166-001	HOUSING "O" RING	1000	EA
7	901-105	KNOB "O" RING	1000	EA
6	280002-2	KNOB	1000	EA
5	087232	ADHESIVE	.27	LB
4	901-270	WASHER	1000	EA
3	280002-1	HOUSING	1000	EA
2	282001-4	TERMINAL, CLIP	2000	EA
1	281001-3	BODY	1000	EA

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
----	--------------	-------------	-------	-----

BILL OF MATERIAL				
UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.				
O	DENOTES CRITICAL CHARACTERISTICS.			
CPK	DENOTES CPK DIMENSIONS,-MINIMUM CPK VALUE			
ST	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.			
CP	DENOTES CP DIMENSIONS,-MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.			
COPIES TO		MATL SPEC		
1	9	18	FINISH	
2	10	19		
3	12	20		
4	13	21	DRW	JMB
5	14	23	DATE	10/24/02
6	15	33	SCALE	4=1
7	16	43	CHK	
8	17	53	DATE	
			SUPER DR	
			DATE	
			RAW STK WT	
			LBS/M	
TOLERANCE UNLESS OTHERWISE SPECIFIED				
TWO PLACE DEC ±.01 FRACTION ±				
THREE PLACE DEC ±.005 ANGULAR ±1°				
TITLE MICROFUSE FUSE POSTS (BACK PANEL MTG.)				
Littelfuse		REVISION	DRWG. NO.	FINAL
DES PLAINES, ILLINOIS 60016		Y	02800002Z	02800002ZXA