
KEMET Part Number: C322C221J2G5TA7301

(C322C221J2G5TATR)

Ceramic, Commercial Grade, KEMET, GoldMax, 220 pF, 5%, 200 V, C0G, Lead Spacing = 5.08mm

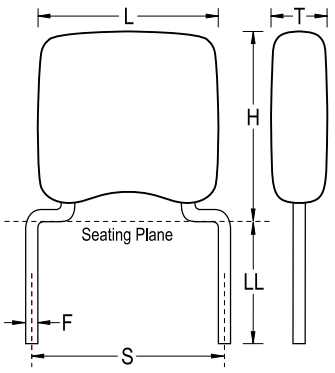

General Information	
Style:	Radial
Supplier:	KEMET
Series:	GoldMax
Description:	GoldMax, Commercial Standard
RoHS:	Yes
Termination:	Tin
Failure Rate:	N/A

Dimensions	
L	5.08mm MAX
H	5.84mm MAX
T	3.18mm MAX
S	5.08mm NOM
LL	7mm MIN
F	0.51mm NOM

Specifications	
Capacitance:	220 pF
Capacitance Tolerance:	5%
Voltage DC:	200 VDC
Temperature Range:	-55/+125C
Temperature Coefficient:	C0G
Dissipation Factor:	0.1%
Aging Rate:	0% Loss/Decade Hour
Insulation Resistance:	100 GOhms
Dielectric Strength:	500 V

Packaging Specifications	
Packaging:	T&R, 305mm, H0 = 16mm
Packaging Quantity:	2500

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

© 2006 - 2016 IntelliData.net