


SBC

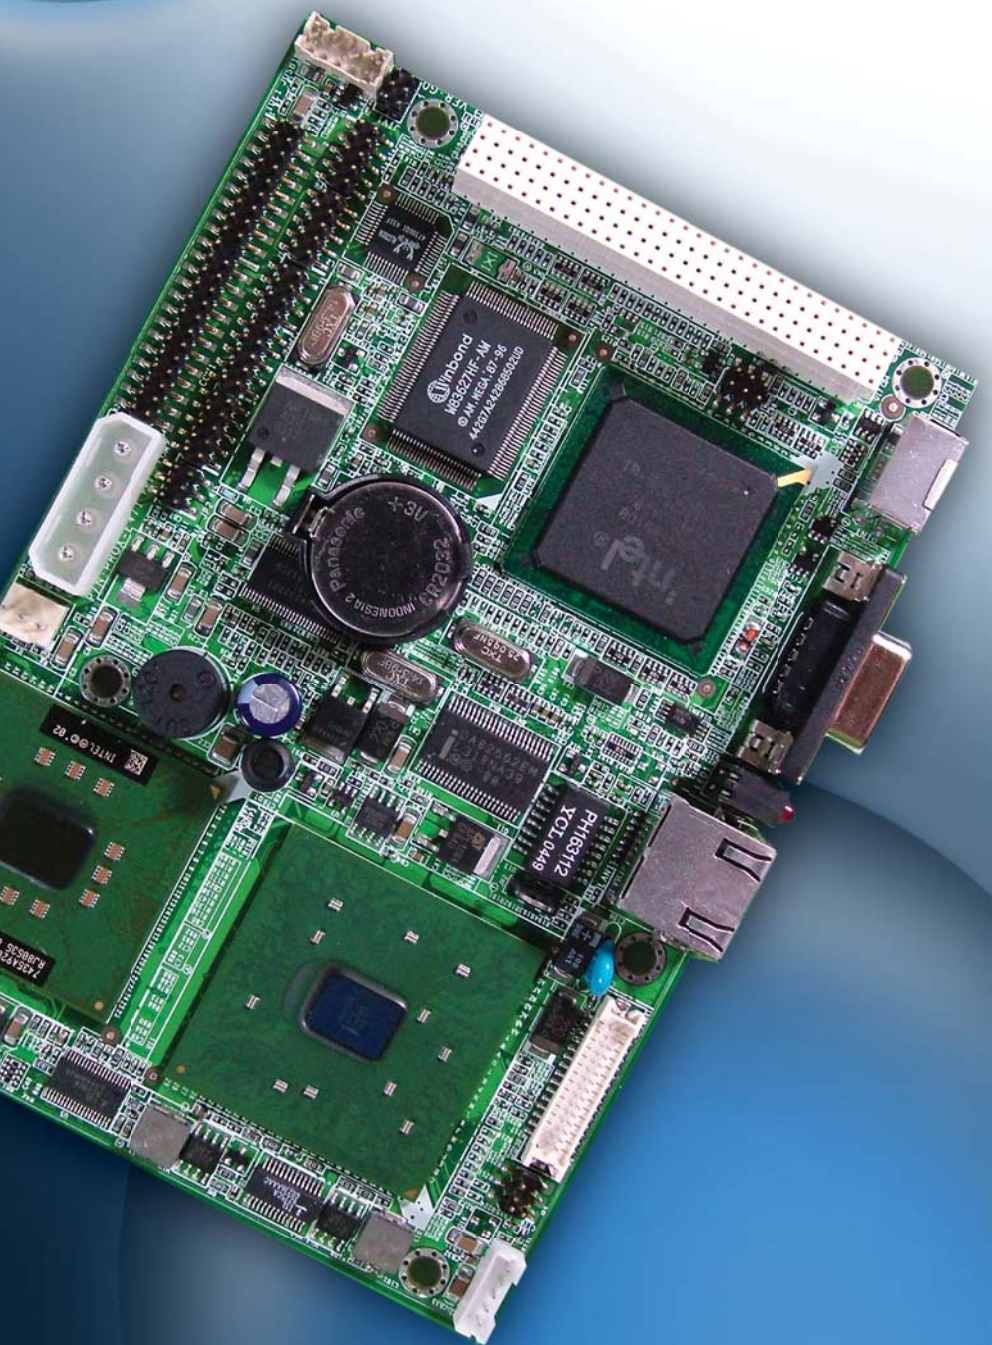

EB-471

ULV Celeron® M CPU Card w/ VGA/Sound/LAN

EB-471 The EB-471 is an ideal 3.5" embedded mini board for low power and fanless solution. It features with ULV Intel® Celeron® M processor, built-in the Intel® 852GM chipset which can support the 36-bit LVDS TFT LCD, CRT and TV-out functions, and a DDR266 SDRAM memory can run up to 1GB.

EB-471 can operate in the rough environment under temperature range from 0°C J to 60°C J without fan and require only +5V power supply. EB-471's high performance and low power consumption features make it become the best solution for the embedded systems.

2 x serials, 1 x IDE, 1 x KB/MS, 1 x 10/100 LAN, 2 x USB2.0, 1 x VGA, 1 x Audio, 1 x IrDA are all integrated on the EB-471. In addition, EB-471 also provides 1 x PC/104+ connector for further expansion applications.

EB-471 is an ideal solution for communications appliances, transaction terminal, interactive client, industrial automations and other applications with low power requirement.



No. 24, Lane 365, Yang Guang St., Nei Hu District, Taipei 114, Taiwan, R.O.C.

Tel: +886-2-8751-1111

Fax: +886-2-8751-1199

Email: sales@protech.com.tw


<http://www.protech.com.tw>



ISO CERTIFIED
9001 14001

EB-471

ULV Celeron® M 3.5" Mini Board with VGA/Sound/LAN

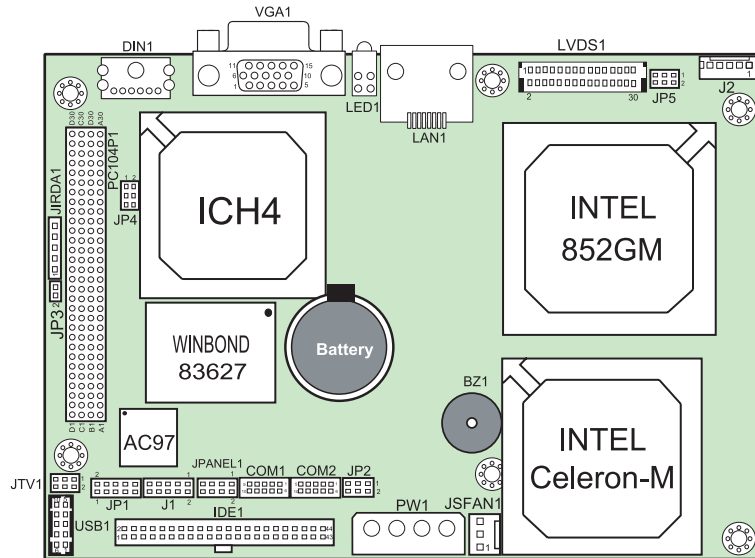

Specifications

System	
CPU Type	Intel® Celeron® M processor
CPU Frequency	ULV 600MHz (non L2 cache)
Chipset	Intel® 852GM + ICH4
DRAM	1x200-pin DDR SO-DIMM, support DDR266 SDRAM up to 1GB
BIOS	Phoenix-Award PnP BIOS, with VGA BIOS
Watchdog	1~255 secs Watchdog timer selectable w/Reset/NMI
Power Supply	Support AT power
Power Requirement	+5V, +12V (Only +5V) (Only +5V: +5V only provide power for SBC, don't have enough power to support expansion card.)
Dimension	102mm x 145mm (4.02" x 5.71")
I/O Chipset	
IDE Interface	1 x 44-pin IDE (UDMA 33/66/100)
Bus Interface	PC/104+
Serial Port	2 x COM ports, COM1 for RS232, COM2 for RS232/422/485 (for 16550 compatible type of UART)
IrDA	1 (SIR)
Keyboard	Mini DIN connector or external connector

Mouse	Y-cable
LAN	Intel® 82562EM (10/100 Mbps)
Audio	AC '97 Codec, Realtek ALC202A with Line-in/Line-out/MIC
USB	2 x USB 2.0

Display	
Graphic	Built-in Intel® 852GM, share system memory, Support CRT, LVDS, TV-out
LCD Interface	18/36-bit LVDS

Environment	
Operation Temp.	0°~60°C (32°~140°F)
Storage Temp.	-40°~85°C (-40°~185°F)
Humidity	Operation humidity 20~90%, storage humidity 20~95%

Ordering Information	
LB-471	3.5" SBC with Intel Celeron M ULV 600MHz CPU /VGA /LAN

PERFORMANCE & POWER CONSUMPTION

CPU Type	3D Mark 2001 SE Build 330	Business Winstone 2002	Winstone 2001	Power Consumption +5V / +12V or only +5
Celeron® M ULV 600MHz	1104	11.7	14.9	1.9 / 0.047 or 2.083

All of trademarks and brand names are the property of their owners. Trademark "Protech" is the property of Protech Systems Co., Ltd. All information contained in this document is subject to change without any prior notice. This catalog is copyrighted in Jan, 2005.