
15 1552 02 V


RCA connectors

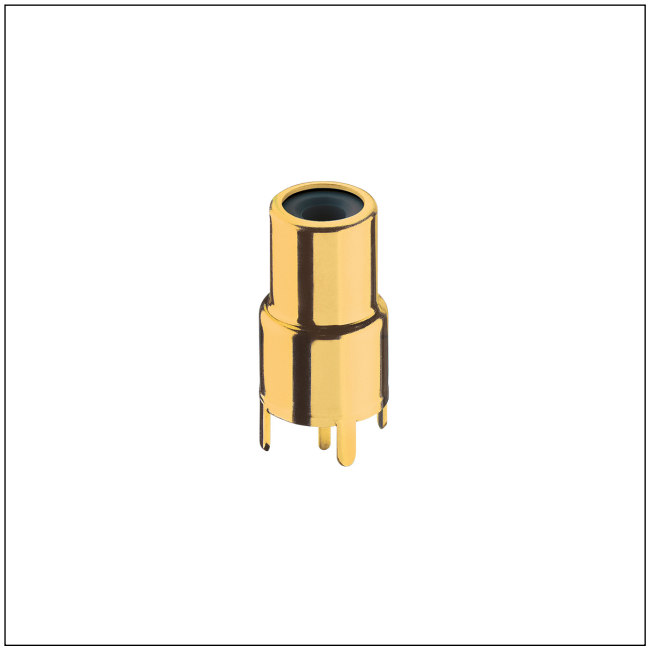


RCA chassis socket acc. to JEITA RC-5231, upright version, for printed circuit boards

State: New

15 1552 02 V

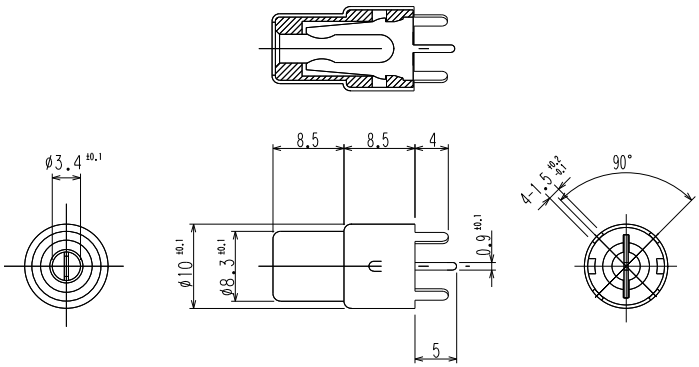

*a



*a printed circuit board layout

Environmental conditions

Temperature range	-20 °C/+70 °C

Materials

Insulating body	PBT GF, V-0 according to UL94
Inner contact	CuZn, gold-plated
Outer contact	CuZn, gold-plated

Mechanical data

Mating cycles	≥ 500
Insertion force	≤ 30 N
Withdrawal force	3–30 N

Electrical data (at T_{amb} 20 °C)

Contact resistance	≤ 50 mΩ
Rated current	2 A
Rated voltage	34 V DC
Rated impulse voltage	500 V AC/60 s
Insulation resistance	≥ 100 MΩ

Associated products

Counterparts

- 1573 01 V
- STO 1
- STO 11 V
- STO 2
- XSTO 1

15 1552 02 V

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
1552 02 V SCHWARZ	2	200	600

Packaging:
in a tray