

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST
-	-


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED PER ECR-16-011195	09AUG2016	O.C	D.Z

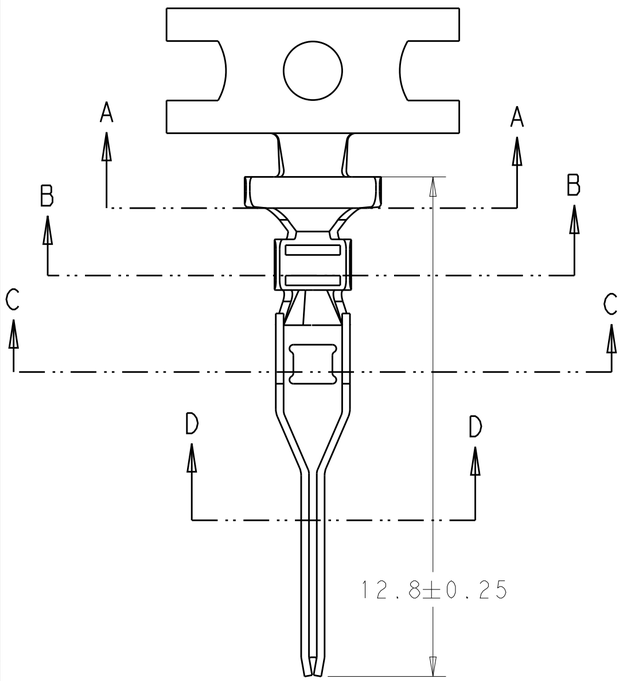


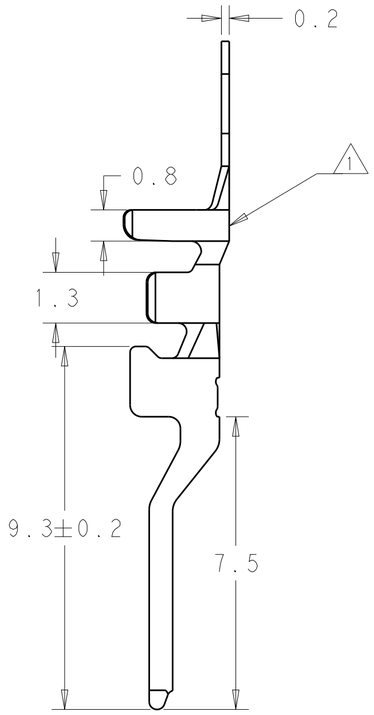



1. TE LOGO.
2. QUANTITY PER REEL: 8000 PIECES.
3. CONTACT IS RoHS COMPLIANT.
4. WIRE RANGE: 20-24 AWG.
5. INSULATION RANGE: Ø 1.3-1.7

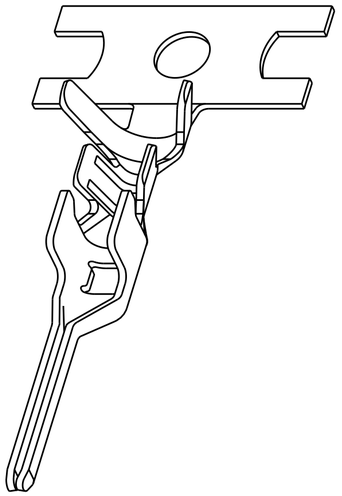

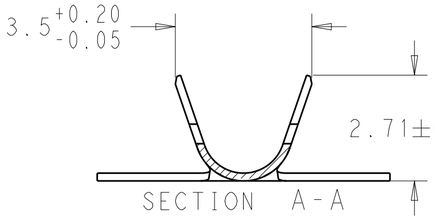





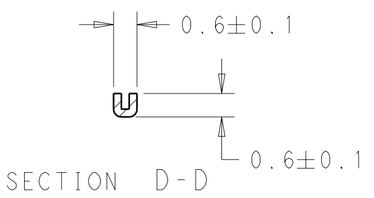

TIN OVER NICKEL	BRASS	2238008-1
FINISH	MATERIAL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.5
2 PLC ±0.13
3 PLC ±0.013
4 PLC ±0.0001
ANGLES ±-

MATERIAL: SEE TABLE
FINISH: SEE TABLE

DWN S.EDWARDS 14DEC2012
CHK KURT RANDOLPH 14DEC2012
APVD KURT RANDOLPH 14DEC2012
PRODUCT SPEC 108-2418
APPLICATION SPEC 114-13315
WEIGHT -

TE Connectivity

NAME TERMINAL, PIN
ECONOMY POWER 2.5

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-2238008	-

Customer Drawing | SCALE 9:1 | SHEET 1 OF 1 | REV B