

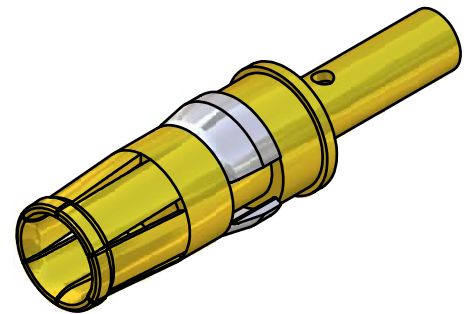
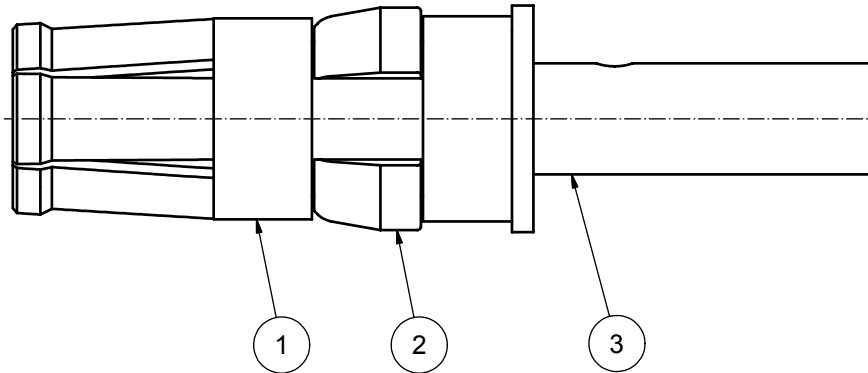


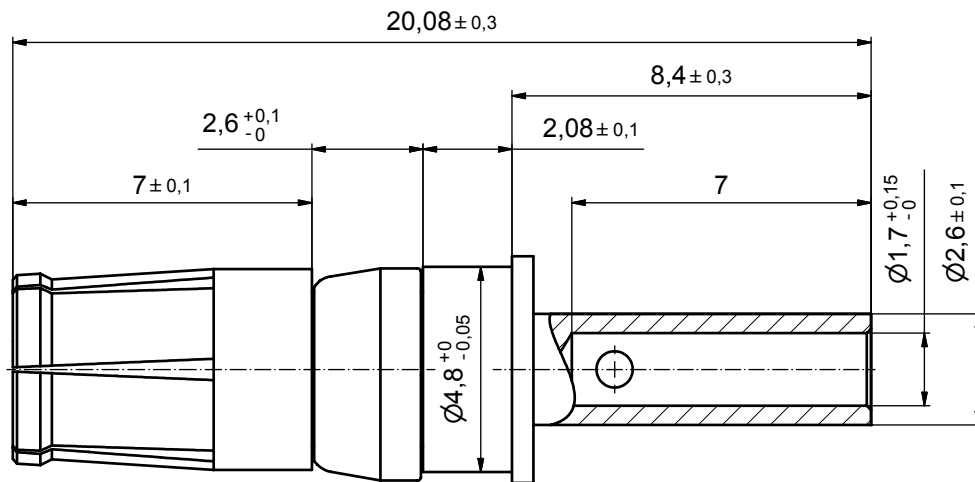

STRIPPING DIMENSIONS



Directive 2002/95/EC
„RoHS“
Compliant

NOTES:

CRIMPING:
USE CRIMP TOOL: 360X10409X
WITH TOOL INSERT: 36-000060
SELECTOR SETTINGS: 3 FOR AWG 16
2 FOR AWG 18
2 FOR AWG 20

3	1	REAR SIDE	COPPER ALLOY	min. 8µin HARD GOLD over min. 50µin NICKEL			
2	1	RETAINING RING	COPPER ALLOY	NICKEL PLATED			
1	1	MATING SIDE	COPPER ALLOY	min. 30µin HARD GOLD over min. 50µin NICKEL			
item	quantity	part description	material	plating			
partlist							
THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	DO NOT ALTER CAD DRAWING BY HAND		tolerance	scale: 8:1			
			ISO 2768-m	material: see partlist			
				dim. in mm	title:		
					HIGH POWER CONTACT FEMALE CRIMP VERSION 10A D-SUB COMBINATION		
					dwg no:	Inventor 10	DIN-A3
			a	Origin	13K1A2381		sh: 1
rev.	description	date	name				
		part no: 13-000291					

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	