CHENMKO ENTERPRISE CO.,LTD

SURFACE MOUNT

SCHOTTKY BARRIER RECTIFIER

VOLTAGE RANGE 20 - 40 Volts CURRENT 2.0 Amperes

SSM22LPT

THRU

SSM24LPT

Lead free devices

FEATURES


* Plastic package has Underwriters Laboratory Flammability Classification 94V-0
* For surface mounted applications
* Low profile package
* Built-in strain relief
* Metal silicon junction, majority carrier conduction
* Low power loss, high efficiency
* High current capability, low forward voltage drop
* High surge capability
* For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
* High temperature soldering guaranteed : 260°C/10 seconds at terminals

MECHANICAL DATA

Case: JEDEC SMA molded plastic
Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Weight: 0.002 ounce 0.064 gram



SMA

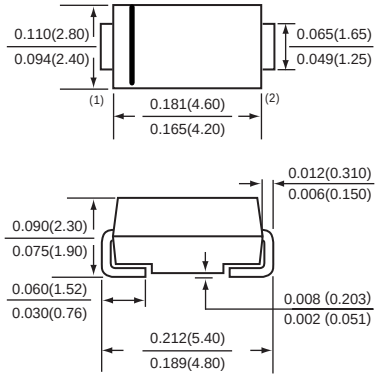

Dimensions in inches and (millimeters)

SMA

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

MAXIMUM RATINGES (At T_A = 25°C unless otherwise noted)

RATINGS	SYMBOL	SSM22LPT	SSM23LPT	SSM24LPT	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	Volts
Maximum RMS Voltage	V_{RMS}	14	21	28	Volts
Maximum DC Blocking Voltage	V_{DC}	20	30	40	Volts
Maximum Average Forward Rectified Current	I_O	2.0			Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	60			Amps
Typical Junction Capacitance (Note 2)	C_J	250			pF
Typical Thermal Resistance (Note 1)	$R_{\theta JL}$	20			°C / W
Operating and Storage Temperature Range	T_J,T_{STG}	-65 to +125			°C

ELECTRICAL CHARACTERISTICS (At T_A = 25°C unless otherwise noted)

CHARACTERISTICS		SYMBOL	SSM22LPT	SSM23LPT	SSM24LPT	UNITS
Maximum Instantaneous Forward Voltage at 2.0 A DC		V_F	0.40			Volts
Maximum Average Reverse Current	@ T_A = 25°C	I_R	1.0			mAmps
at Rated DC Blocking Voltage	@ T_A = 100°C		10			mAmps

NOTES : 1. Thermal Resistance (Junction to Lead) : PC Board Mounted on 0.2 X 0.2" (5 X 5mm) copper pad area.
2. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts.

RATING CHARACTERISTIC CURVES (SSM22LPT THRU SSM24LPT)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

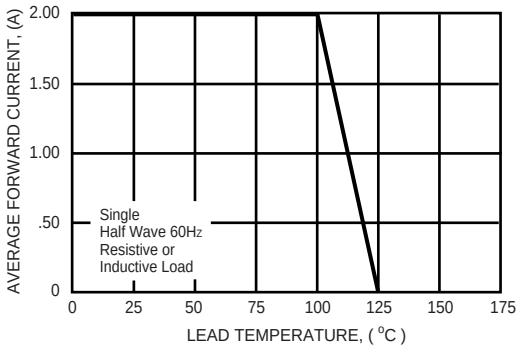


FIG. 2 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

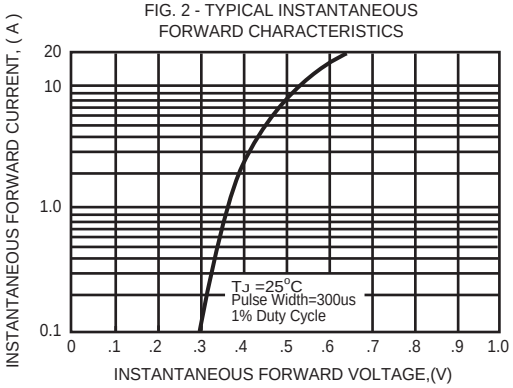


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

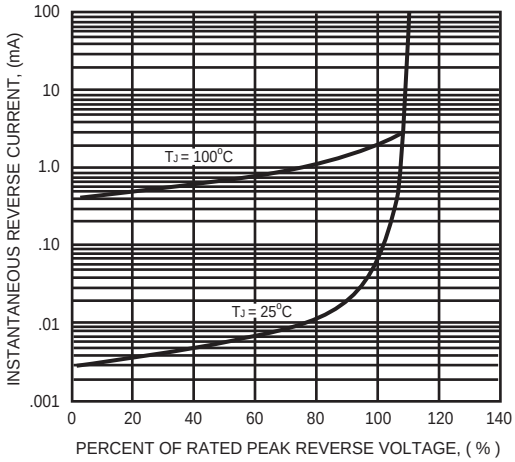


FIG. 4 - MAXIMUM NON-REPETIVE FORWARD SURGE CURRENT

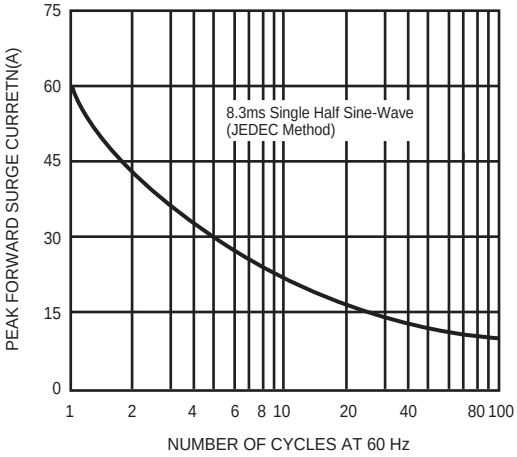


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

