
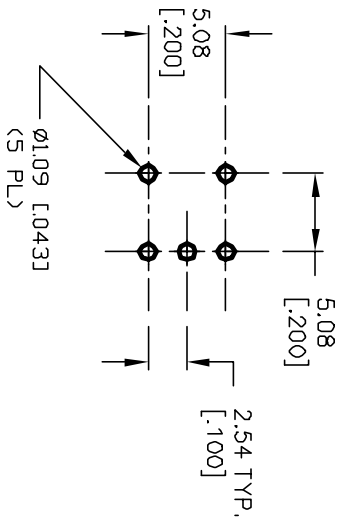


CIRCUIT: SPDT

CONTACT CONFIGURATION




SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
DN	OFF	DN
2-3	OPEN	2-1

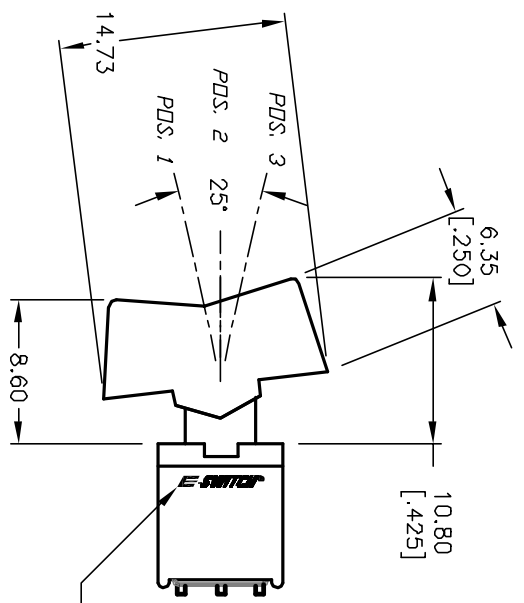

RECOMMENDED P.C.B. LAYOUT

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 3A @120VAC or 28VDC;
1A @250VAC.
5. FIXED TERMINAL/MOVING CONTACT MATERIAL:
COPPER ALLOY w/Silver plate.
6. ELECTRIC LIFE: 30,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP. -30°C to +85°C
10. ▲ DESIGNATE MAJOR FEATURE
- ▲ 11. ACTUATOR: NYLON, BLACK STD.

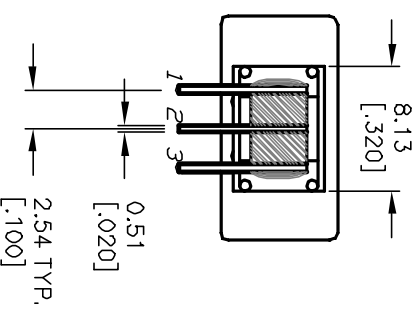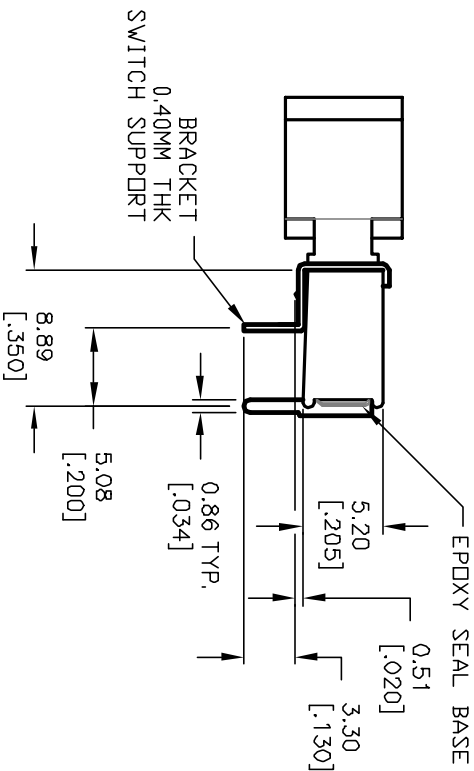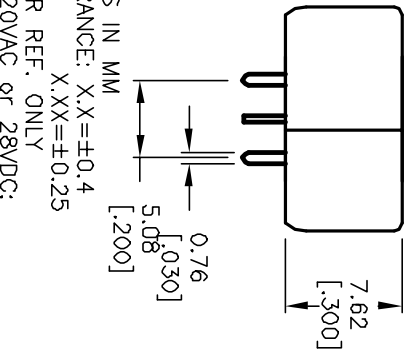

REV.				TITLE			
B	12664	REVISED NOTE 4	CJB	12/26/02	CJB	4004 WMS-3 R1 BLK M6 QE	
A	12401	RELEASED	CJB	9/4/02	CJB		
REV.	ECN No.	DESCRIPTION	DATE	CHKD	SCALE	DATE	DR
		THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			2:1	4/12/01	CJB
							DWG
							REV