


DETAILS


Product Number	FA10667_CXP-SS
Family	Rose
Type	Assembly
Color	black
Diameter	21,6 + 21,6 mm
Height	13,15 mm
Style	square
Optic Material	PC
Holder Material	
Fastening	tape
Status	production ready
ROHS Compliant	Yes
Date Updated	27/06/2013



OPTICAL PROPERTIES

LED	Viewing	Light	Effi-	cd/lm	Connector
	Angle	Beam	ciency		
XP-E	16 deg	Smooth spo...	86 %	6.770	-
XP-G	13 deg	Smooth spo...	85 %	9.810	-
XP-L	16 deg	Smooth spo...	78 %	7.800	-
XP-G2	sim: 13	Smooth spo...	sim: 87 %	sim: 12.200	-
Z5	12 deg	Smooth spo...	83 %	-	-

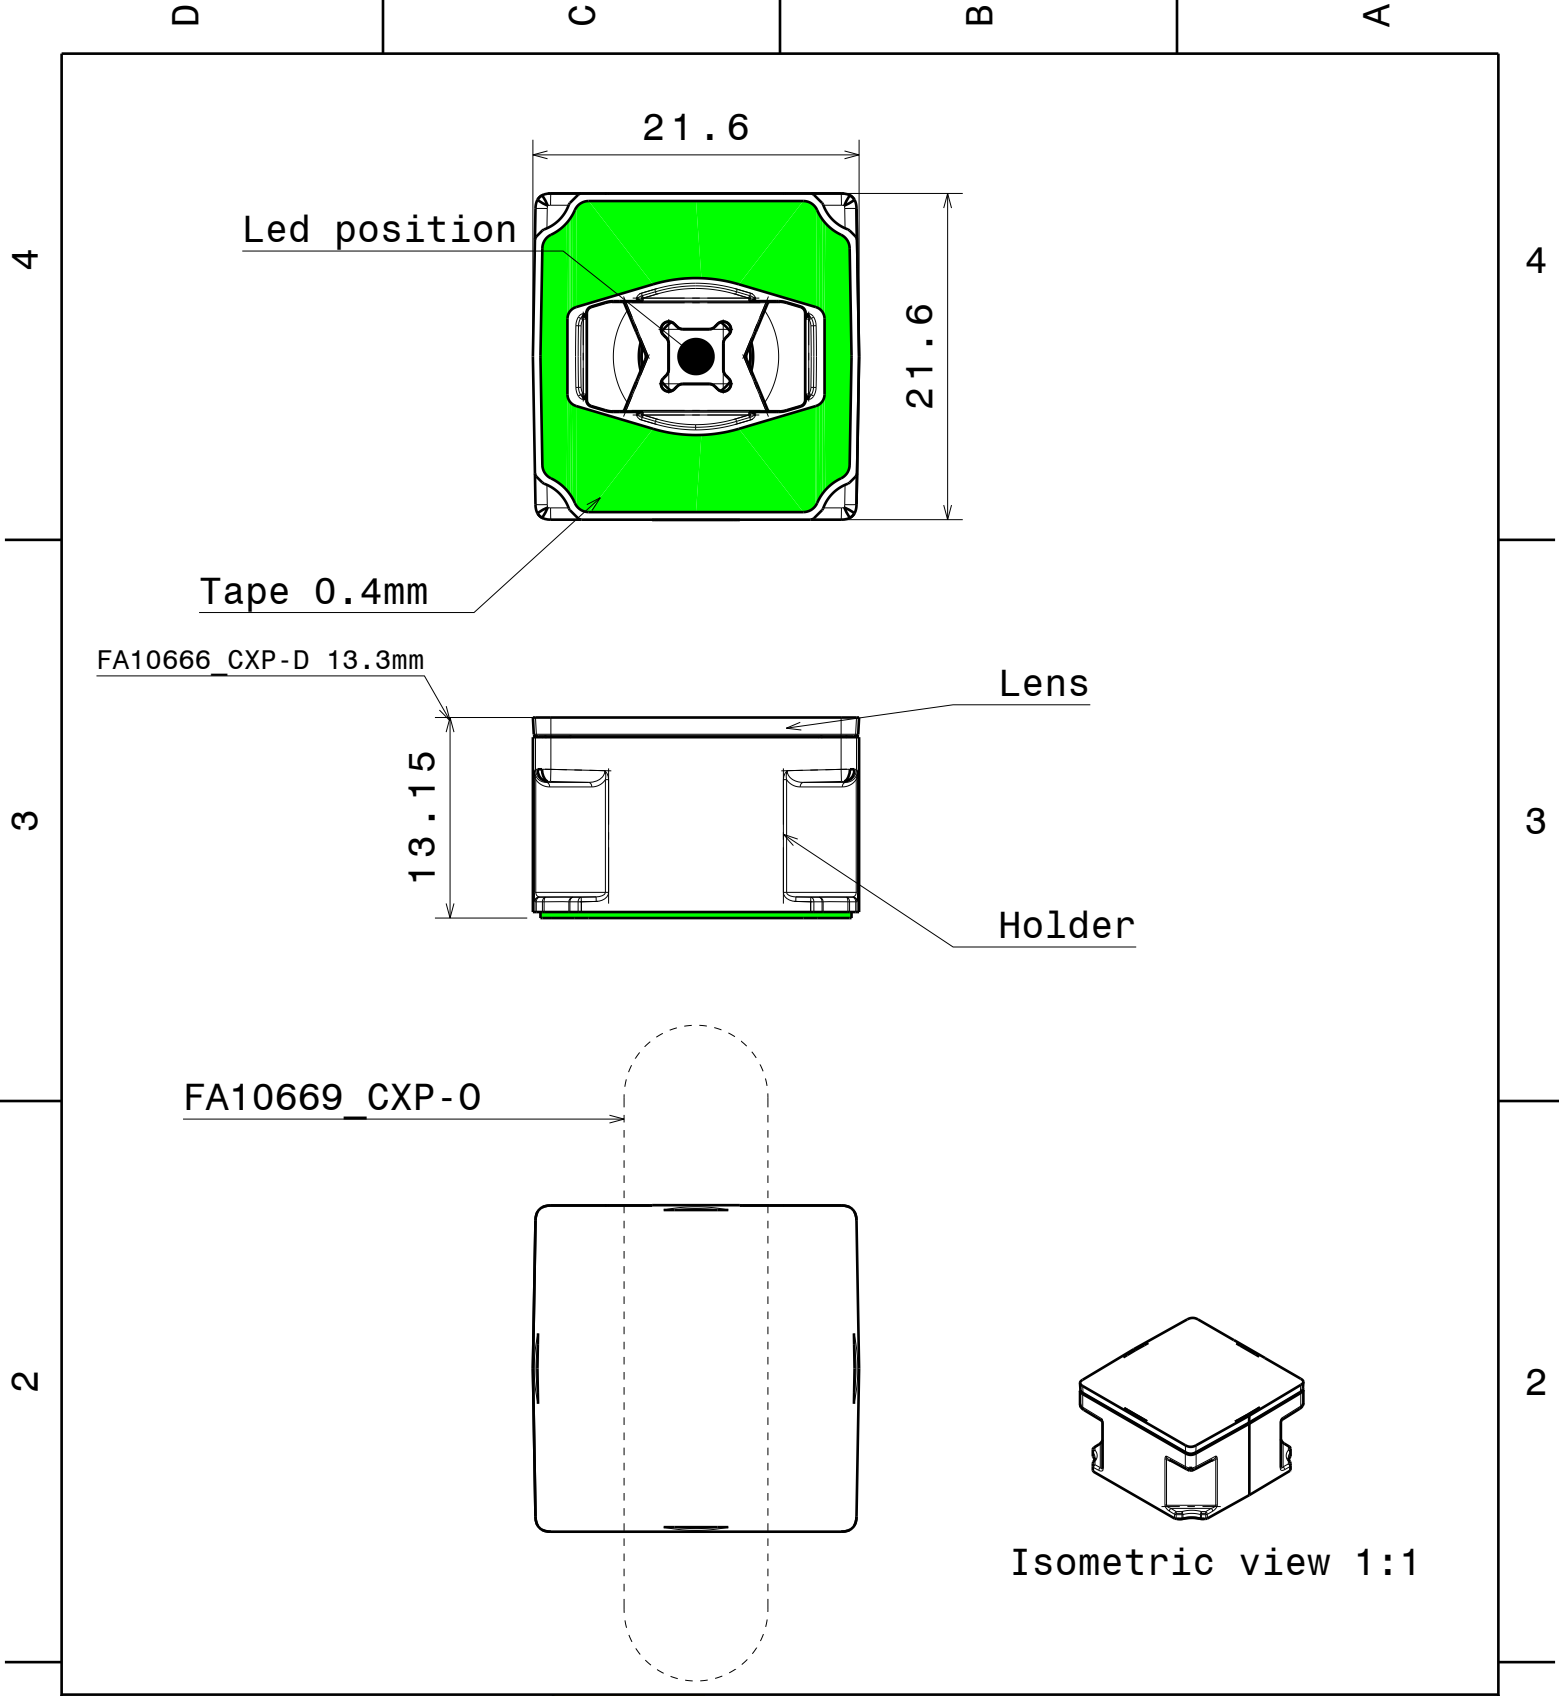


Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: Up to 30mm class M, otherwise class C. According to DIN ISO 2768-2 Form and position: class L		<div>LEDiL</div> <div>Ledil Oy Salorankatu 10 FIN 24240 SALO Finland</div>			
THIRD ANGLE PROJECTION: 		DRAWING TITLE <div>Datasheet CXP</div>			
This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy."		SIZE A4	PART NUMBER -		
		SCALE 2:1	WEIGHT -		SHEET 1 / 1

D

A


Ledil Oy FA10667_CXP-SS FA10667_CXP-SS / LDC (Linear)

Luminaire: Ledil Oy FA10667_CXP-SS FA10667_CXP-SS
Lamps: 1 x Cree XP-E (white)

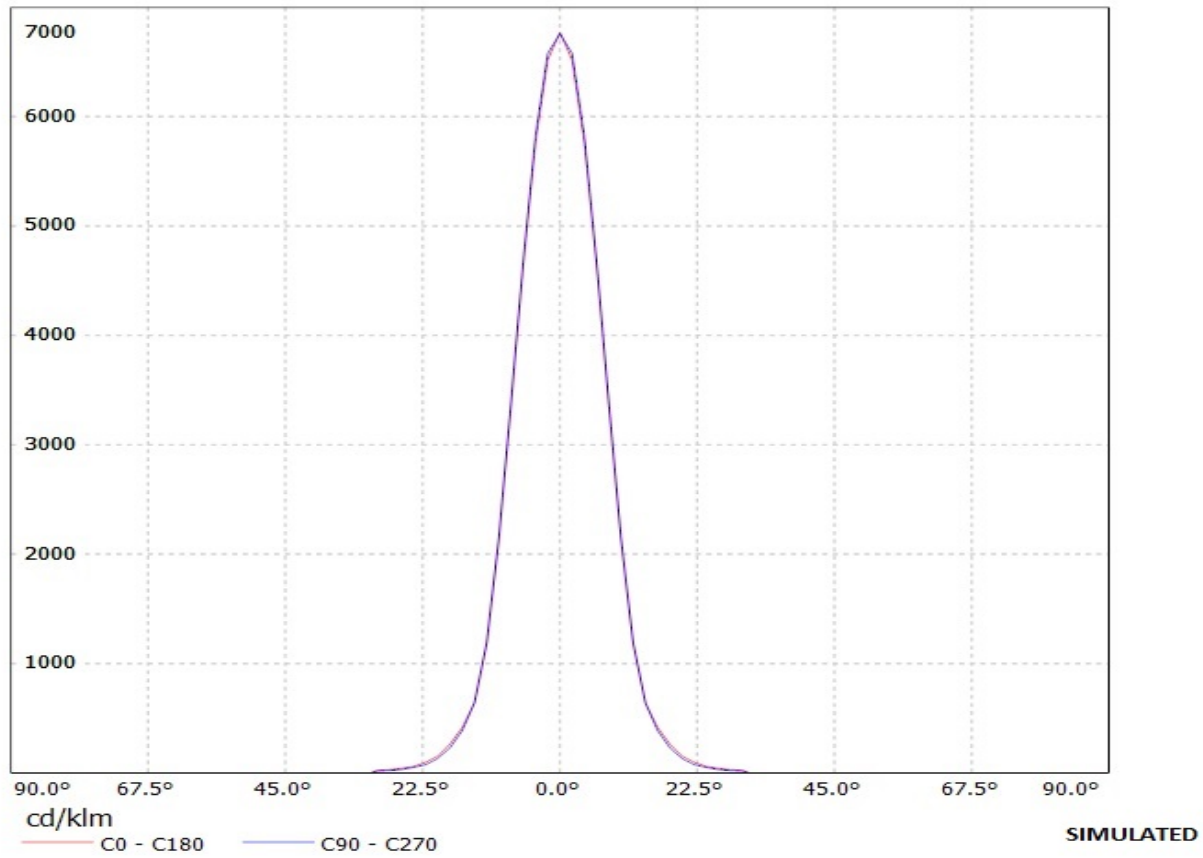


Ledil Oy FA10666_CXP-G-D FA10666_CXP-G-D / LDC (Linear)

Luminaire: Ledil Oy FA10666_CXP-G-D FA10666_CXP-G-D
Lamps: 1 x Cree XP-G (White)

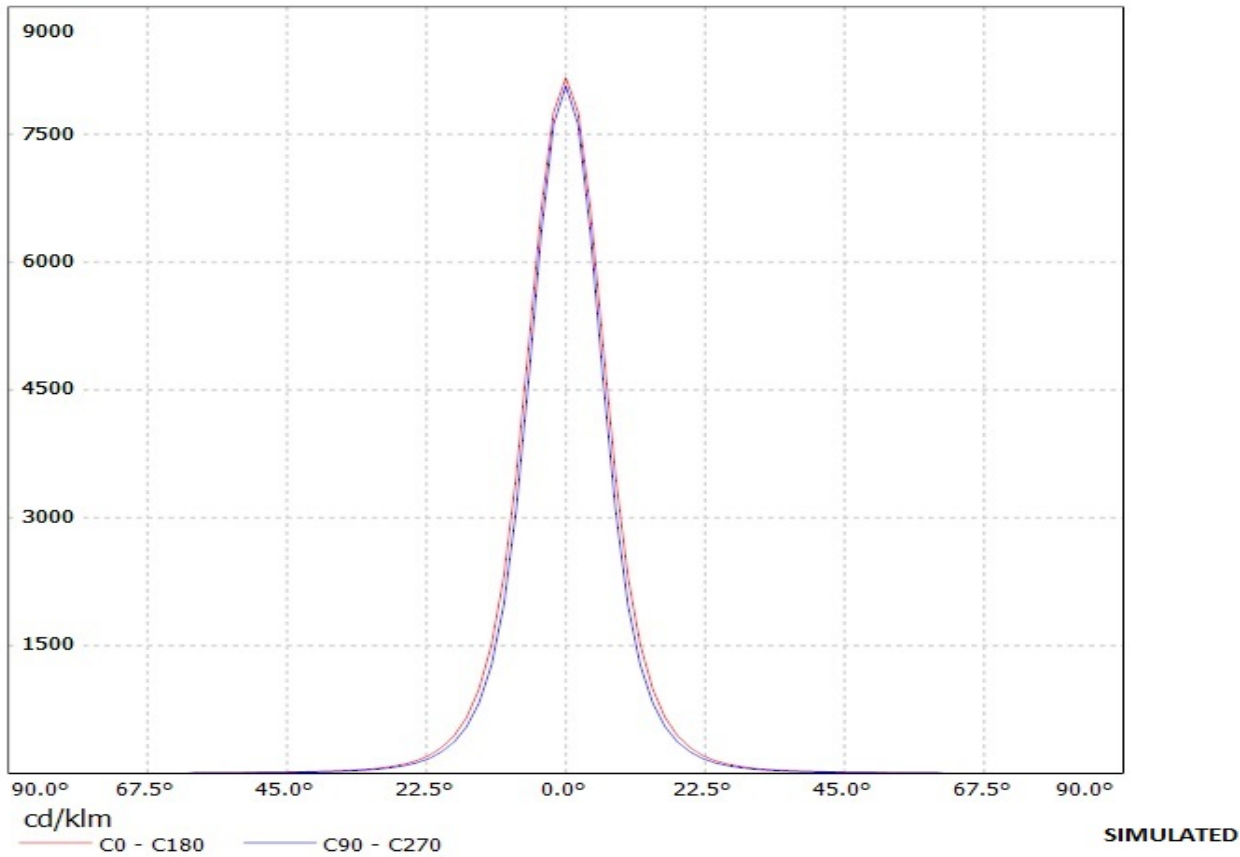

Ledil FA10667_CXP-SS_(XP-L) / LDC (Linear)


Luminaire: Ledil FA10667_CXP-SS_(XP-L)
Lamps: 1 x CREE_XP-L_(XPLAWT-0-7A3-U50-0H-0001)
_107.852lm@250mA_CCT=3185K_P=0.7W_I=0.25A

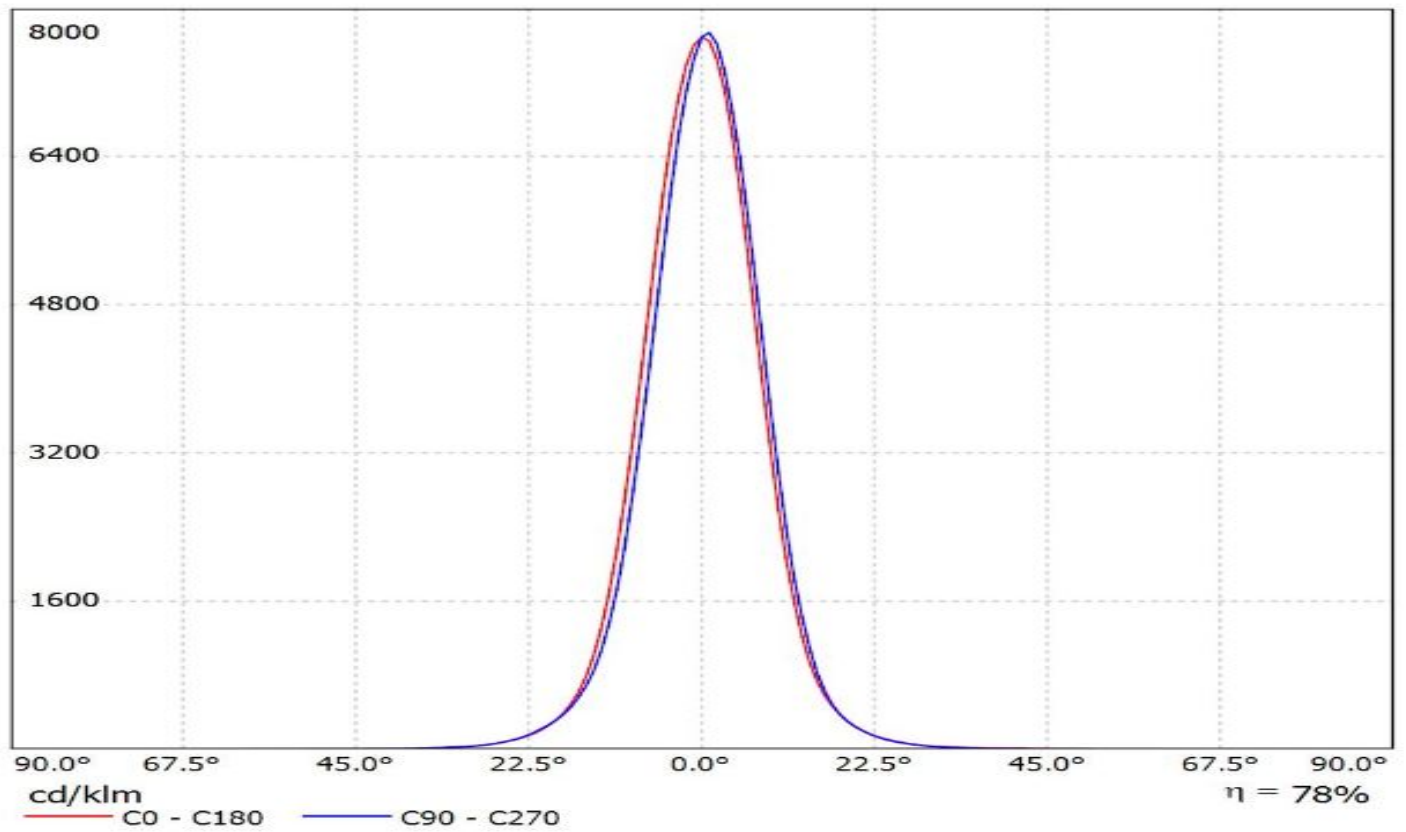

Ledil Oy FA10667_CXP-SS FA10667_CXP-SS / LDC (Polar)

Luminaire: Ledil Oy FA10667_CXP-SS FA10667_CXP-SS

Lamps: 1 x Cree XP-E (white)

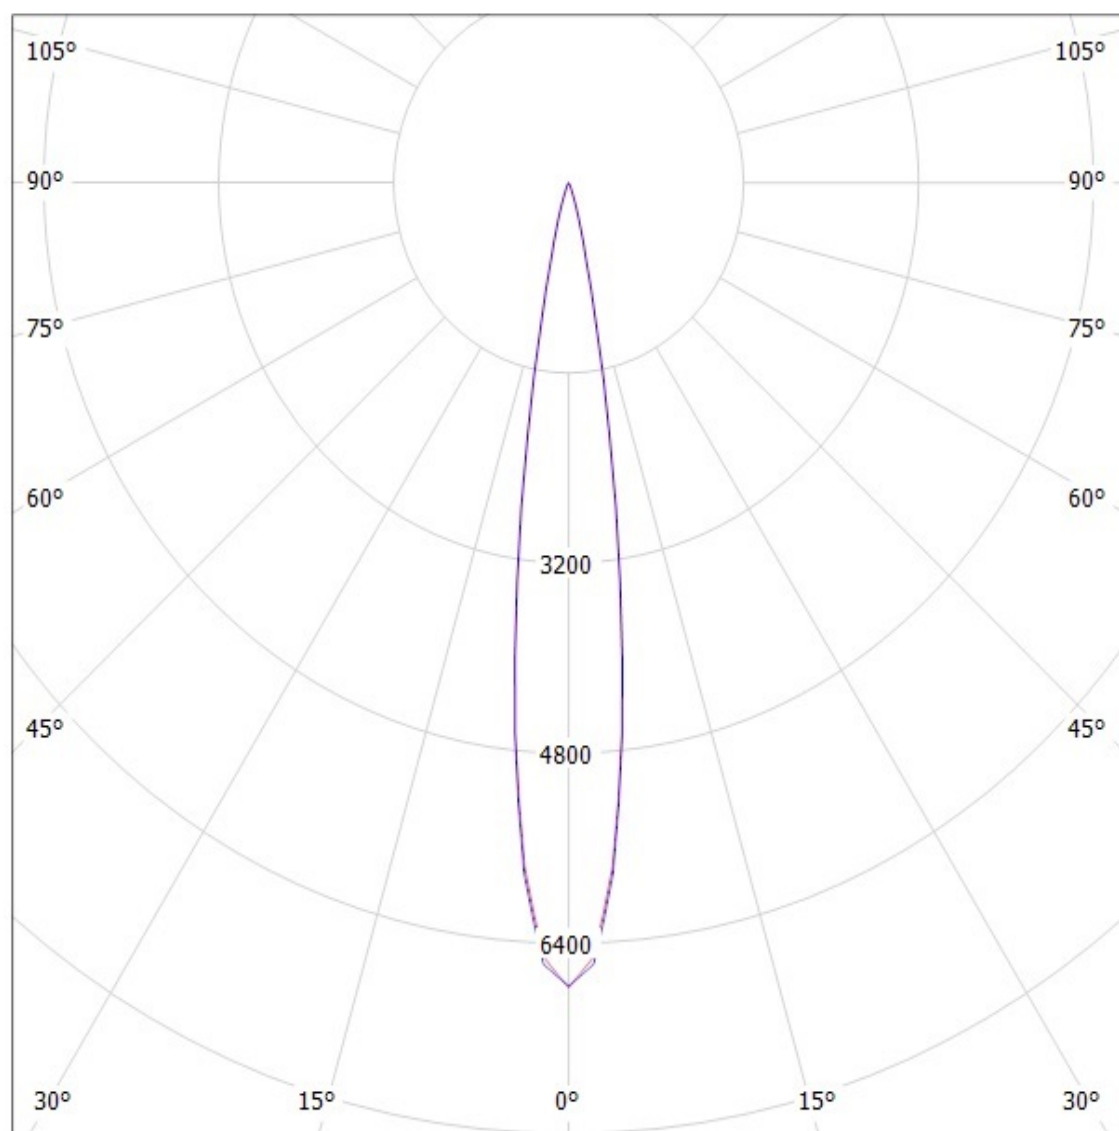

cd/klm

— C0 - C180


— C90 - C270

SIMULATED

Ledil Oy FA10667_CXP-G-SS FA10667_CXP-G-SS / LDC (Polar)


Luminaire: Ledil Oy FA10667_CXP-G-SS FA10667_CXP-G-SS

Lamps: 1 x Cree XP-G (White)

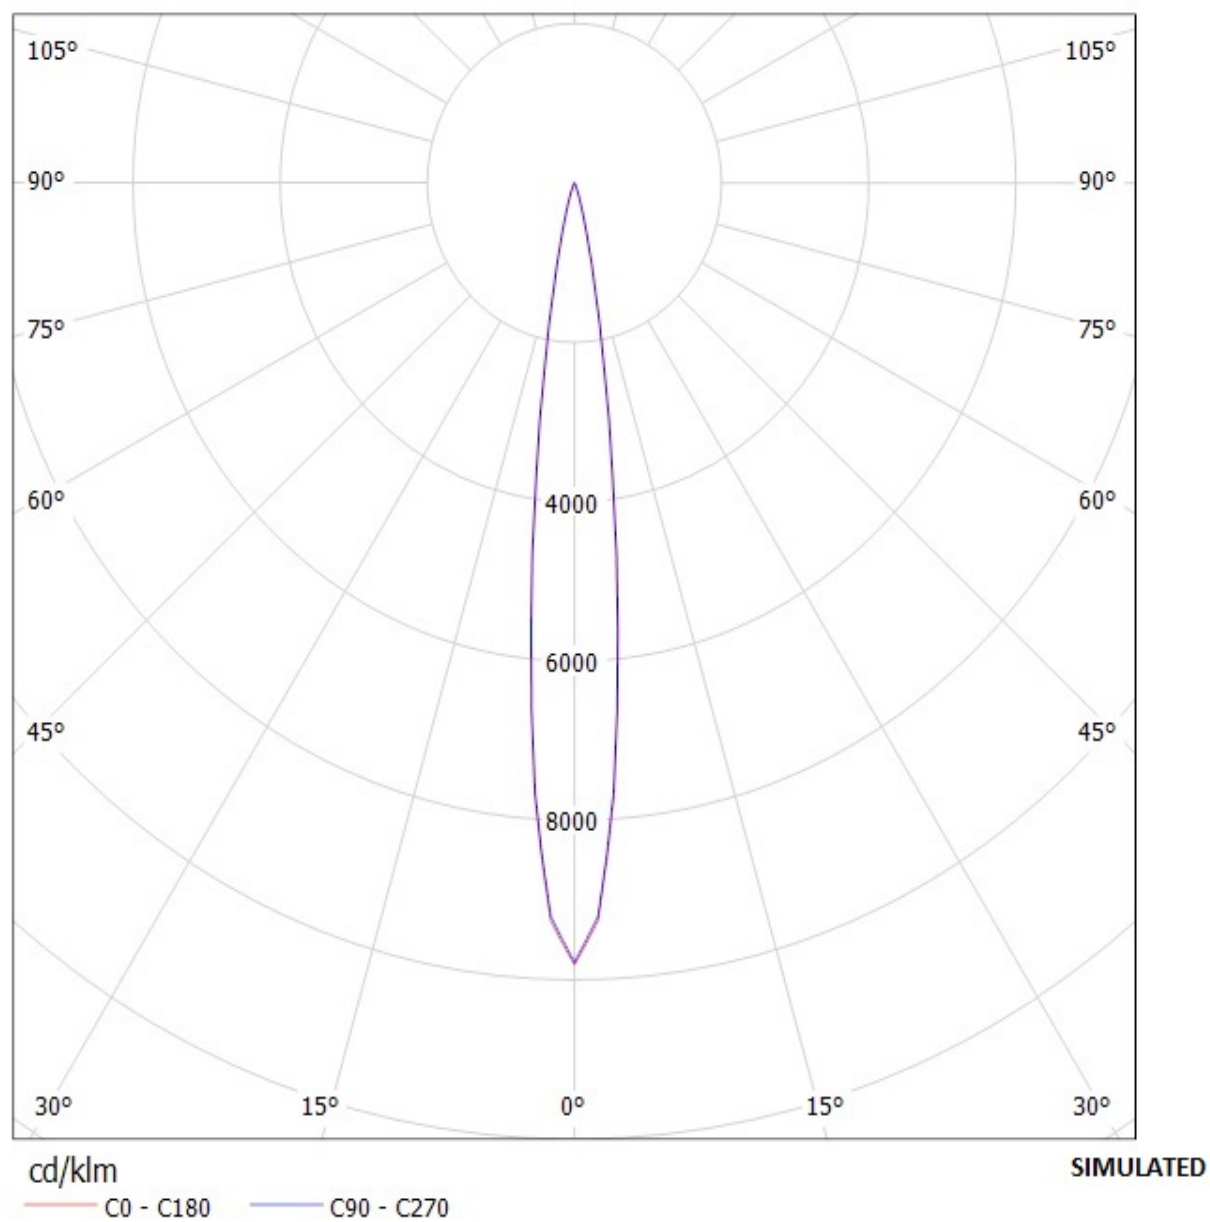

Ledil FA10667_CXP-SS_(XP-L) / LDC (Polar)

Luminaire: Ledil FA10667_CXP-SS_(XP-L)
Lamps: 1 x CREE_XP-L_(XPLAWT-0-7A3-U50-0H-0001)
_107.852lm@250mA_CCT=3185K_P=0.7W_I=0.25A

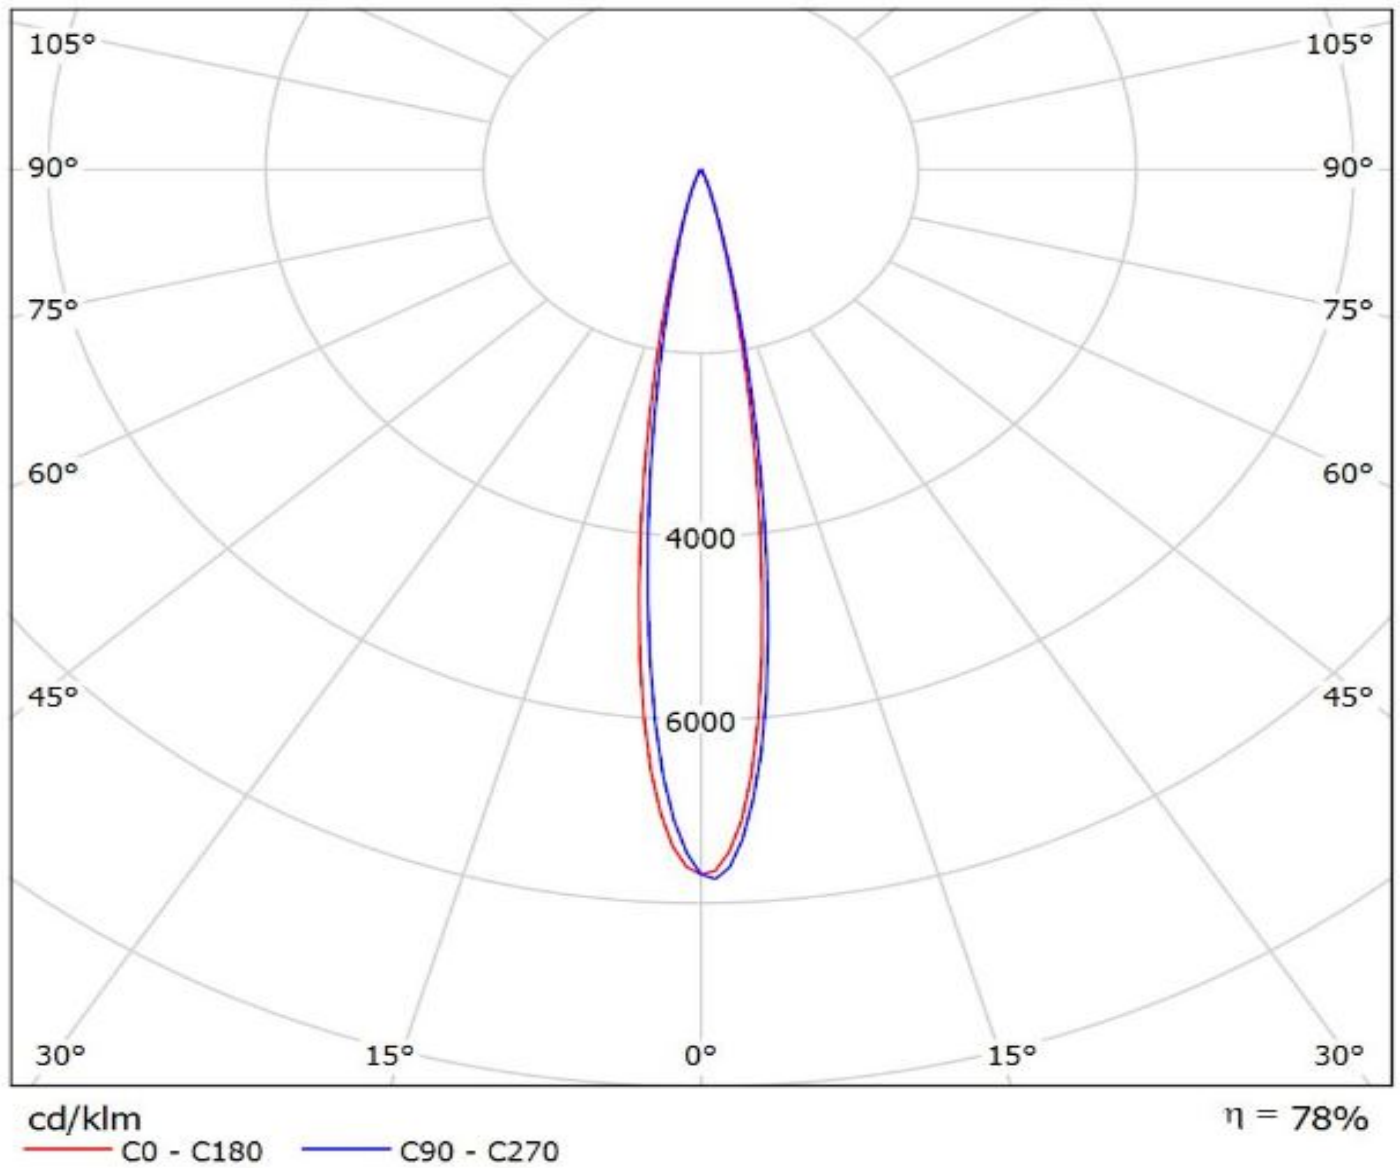

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.