


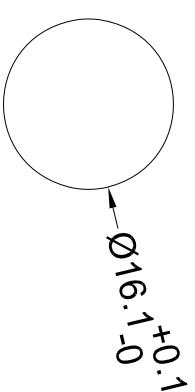


Nut Torque: 5 ~ 14Nm
 Protection Grade: IP65, IK08
 Shell: Brass, Ni Plating
 Base: PA66

Lamp Type: LED
 Forward current : 20mA
 Lamp Life: 50000H
 Beads Color: Red And Green
 Lamp voltage: 24V
 Operating Temperature: -20°C~80°C
 Safety Approval:   

CUT-OUT



D · SWITCH
 东莞市德禄电子有限公司
 D · SWITCH ELECTRONICS CO.,LTD

公差 TOLERANCES .X± 0.5 .XX± 0.3 角度 ANGLE ±1° 单位 DIMENSION UNIT mm.

版本 VER	变更说明 CHANGE DESCRIPTION	日期 DATE	ECON NO.	核准 APPROVED BY	核对 CHECKED BY	绘图 DRAWN BY	品名 TITLE	图号 DRAWING NO
							PBM-16113-FS-RG3-A24-B8S-LA3	PBM-16113-FS-RG3-A24-B8S-LA3_A0