
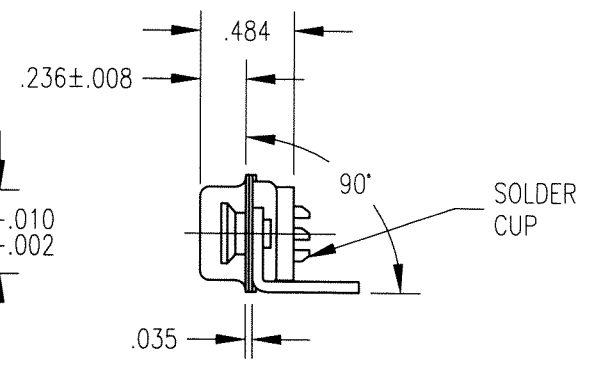
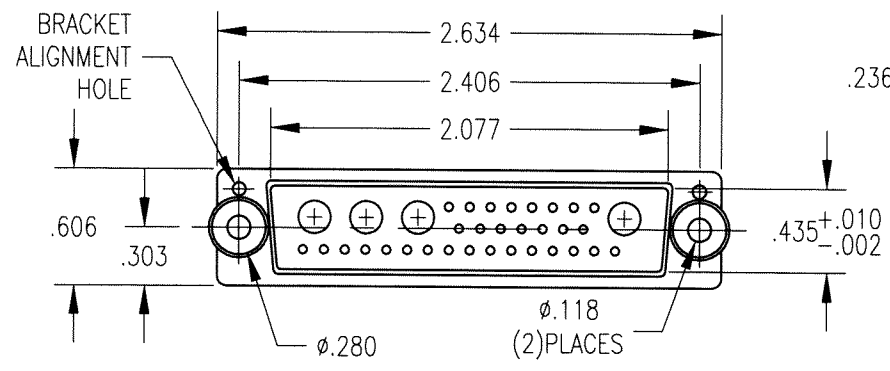


DWG. NO. RM36W4P-1003			
REV	DESCRIPTION	BY	APPD
E	ECN 2502	JH 9/12/00	JED 9/12/00

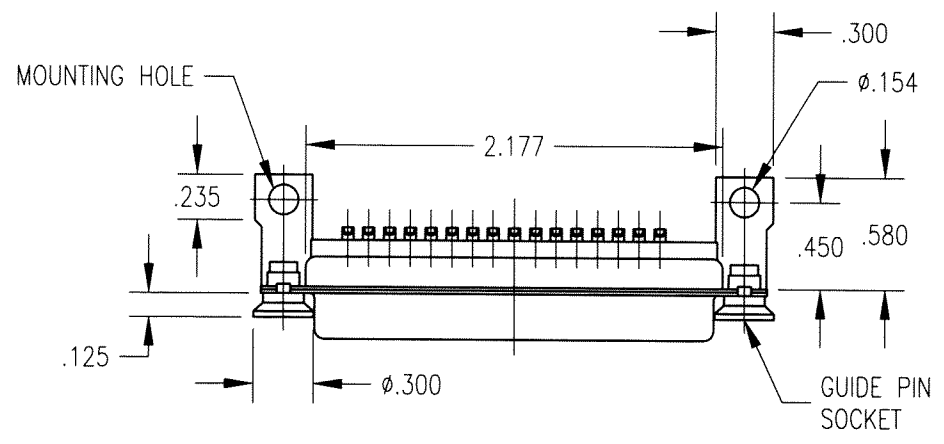

NOTES:

- MATERIALS:  
SHELL: STEEL PER ASTM A568  
INSULATOR: GLASS FILLED POLYESTER, BLACK  
CONTACT: COPPER ALLOY PER ASTM B140
- PLATING:  
CONTACTS: .000030 MIN. GOLD PER MIL-G-45204 OVER  
.000050 MIN. NICKEL PER QQ-N-290  
SHELL: YELLOW CHROMATE OVER ZINC PER ASTM B633
- CONTACT ARRANGEMENT:  
(32) SOLDER CUP SIGNAL CONTACTS (SUPPLIED IN HOUSING)  
(4) COAXIAL OR POWER CONTACTS (NOT SUPPLIED)
- MAXIMUM INSERTION FORCE CONNECTOR: 18 LBS.

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM)				<b>Litton</b>			
TOLERANCES: DECIMALS .xx ± .01/0.254 .xxx ± .005/0.127 ANGLES ± 2°				Winchester/Retconn 400 Park Road Waterloo, Connecticut 06795			
SCALE: 1:1				TITLE			
<b>CUSTOMER DRAWING</b>				36W4P D-SUB CONNECTOR WITH BRACKETWTS			
DRAWN KJT	DATE 03/08/00	CHECKED JH	DATE 3/8/00	PART OF REV			
APPROVED JMC	DATE 3/8/00	APPROVED JED	DATE 3/8/00	<b>A</b>	RM36W4P-1003	SHT. OF 1 1	REV E