
POWER INDUCTOR
MHB1110SG SERIES




FEATURES

- RoHS compliant
- Super low resistance
- Designed for high current power supply applications
- Ferrite core material magnetic shield construction provide good EMI
- Tape & reel packing
- Solder profile acc.J-STD-020D


APPLICATIONS

- High current DC-DC converters
- Telecom soft switches, Base stations
- Battery powered devices
- VRM, multi-phase buck regulators
- PDA,Notebook computers , PC Workstations, Routers, Servers


Part number	Inductance (μH)	Tolerance (±%)	DCR (mΩ)	Isat (A)	Irms (A)
MHB1110SGR15K	0.15	10	0.23±5%	90	45
MHB1110SGR20K	0.20	10	0.23±5%	70	45
MHB1110SGR22K	0.22	10	0.23±5%	64	45
MHB1110SGR25K	0.25	10	0.23±5%	56	45
MHB1110SGR27K	0.27	10	0.23±5%	55	45
MHB1110SGR30K	0.30	10	0.23±5%	47	45
MHB1110SGR32K	0.32	10	0.23±5%	42	45
MHB1110SGR40K	0.40	10	0.23±5%	36	45

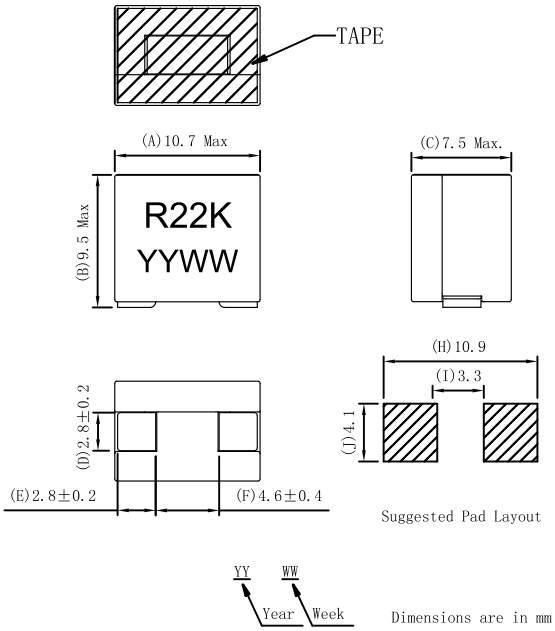

Typical L vs Current

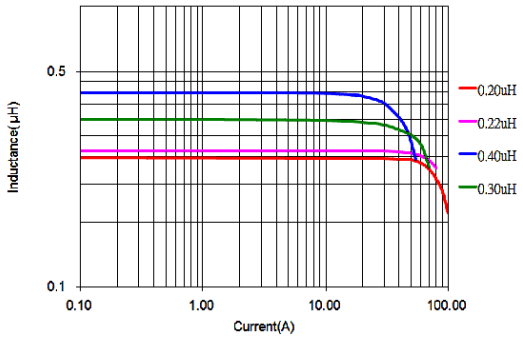

Temperature Rise vs Current

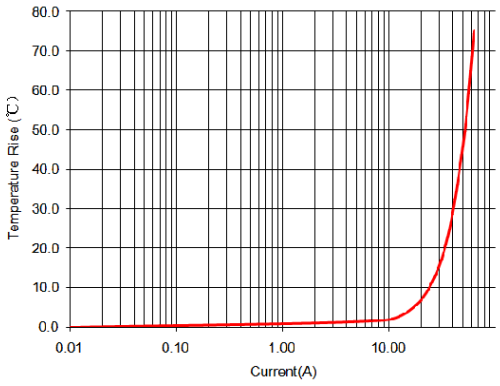

ABSOLUTE MAXIMUM RATINGS

Operating temperature rang (including self-temperature rise)	-40℃ to +125℃
Storage temperature rang	-40℃ to +125℃

SOLDERING INFORMATION

Peak reflow temperature	250℃
Pin finish	Matte tin
Moisture sensitivity level	1

PACKAGING INFORMATION

Tape&Reel	350 pcs per reel
Weigh	3.3 g/pcs

Notes

1. Electrical specification at 25℃.
2. Inductance tested at 100 kHz, 1.0Vrms.
3. Isat is the DC current at which inductance drop (20% Typ) from its value without current.
4. Irms is the current that caused a approx 40℃ temperature rise from 25℃ ambient.

China +86 769 86921000··USA +1 408 612 4549··Korea +82 70 4639 4572··Shanghai +86 13917333450··Taiwan +886 2 271 1117··Hongkong +852 21211269

www.mnc-tek.com