NEMA 5-20P PRIMARY
WOODHEAD #14W33 PLUG

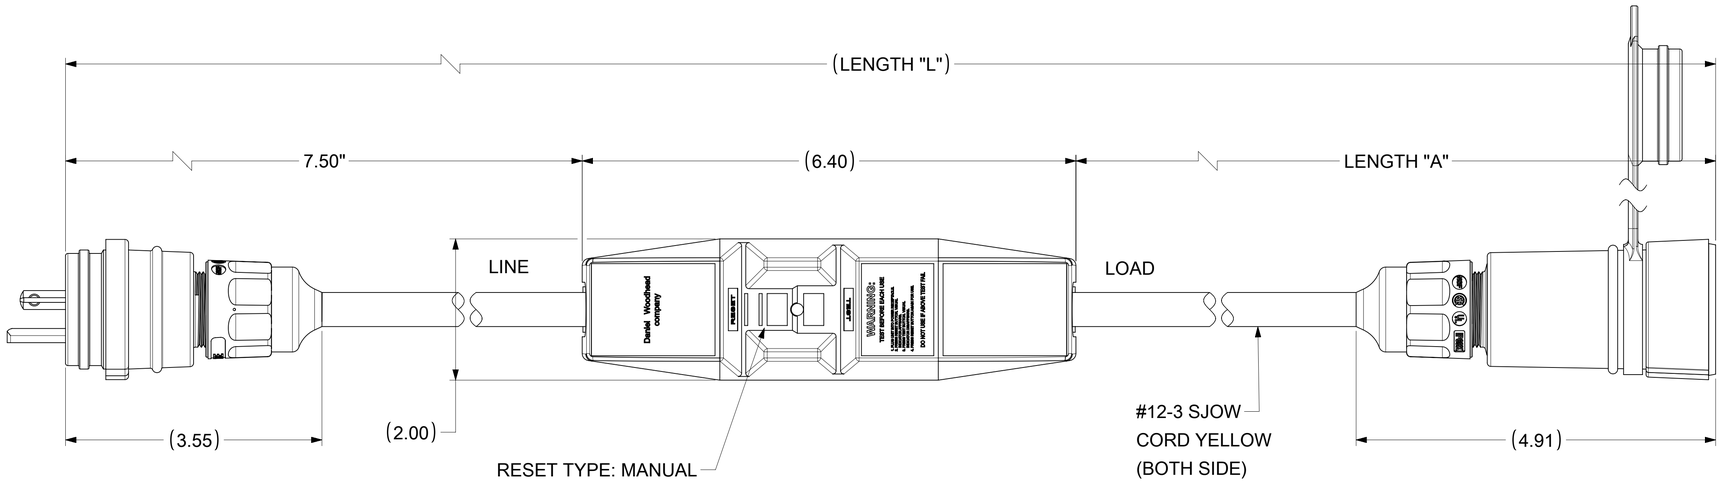

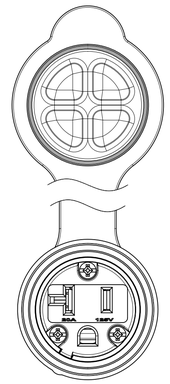

NEMA 5-20R SECONDARY
WOODHEAD #15W33 CONNECTOR

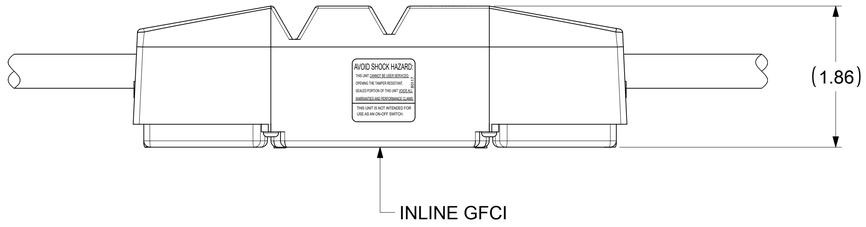

TECHNICAL

LISTED:	cULus
RATED SUPPLY VOLTAGE:	120 VAC
RATED CURRENT:	UP TO 20 AMPS
RESET TYPE:	MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	4-6 mA
OVERLOAD CURRENT:	120 AMP
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS
ENCLOSURE:	NEMA 3R

MATERIAL NO.	ENGINEERING NO.	LENGTH "A"	LENGTH "L"
1301530122	20052-1	9.50 IN.	1 FT. 11.4 IN
1301530125	20052-1-LSS	9.50 IN.	1 FT. 11.4 IN
1301530127	20052-25	23 FT. 10.5 IN.	25 FT. 0.4 IN.
1301530129	20052-25-LSS	23 FT. 10.5 IN.	25 FT. 0.4 IN.
1301530131	20052-6	4 FT. 10.5 IN.	6 FT. 0.4 IN.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

FUNCTIONAL SYMBOLS
FA = 0
FC = 0
FP = 0

DIVISIONAL SYMBOLS

DIMENSION UNITS	SCALE
INCH	NTS

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL	± °
4 PLACES	±
3 PLACES	±
2 PLACES	±
1 PLACE	±
0 PLACES	±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: NEW SALES DRAWING CREATED

EC NO: 693149
DRWN: PPURSUTANDEL 2021/12/08
CHK'D: DNGUYEN62 2022/01/26
APPR: HKNEELAND 2022/04/28

INITIAL REVISION:
DRWN: AL 2003/10/07
APPR:

THIRD ANGLE PROJECTION | DRAWING: D-SIZE | SERIES: 130153

molex

GFCI INLINE 20A, 120V ATTACHABLE W/PLUG & CONN. WATERTITE

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
1301530122	PSD	000	A

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE TABLE	GENERAL MARKET	1 OF 1

DOCUMENT STATUS	P1	RELEASE DATE	2022/04/28 15:45:39