





Verpackt im Gurt nach DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
Verpackungseinheit: 280 Stück
Packaging unit: 280 pcs



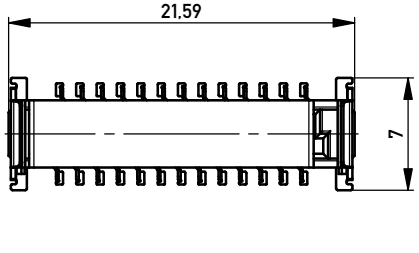


ohne Ansaughaube - *without hood*

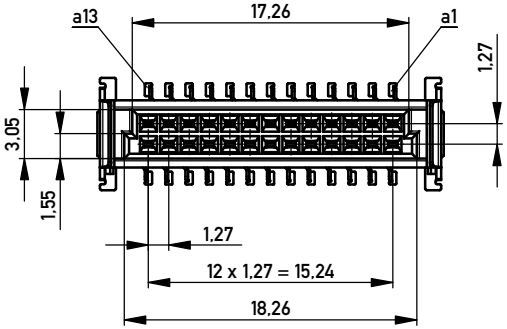

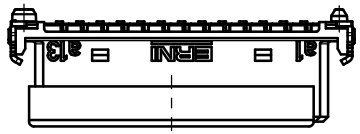

Abspulrichtung - *Reel off Direction*

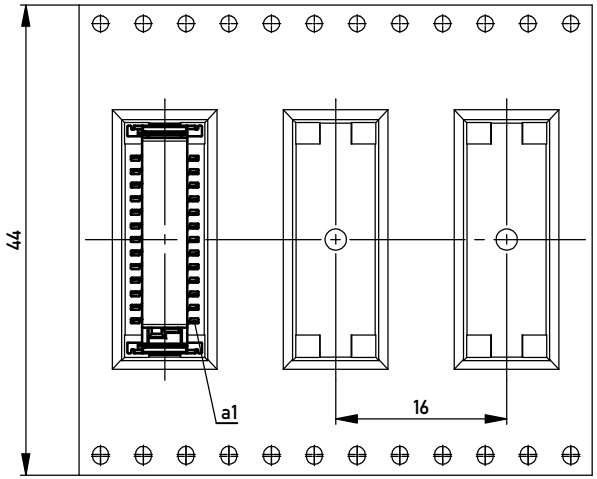


Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinnt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

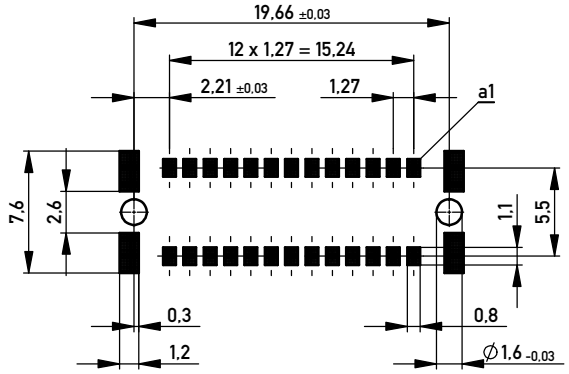

BA 7-13 - 8mm Bauhöhe
type7-13 - Low Profile

Information:	Tolerances	All Dimensions in mm	Scale 3:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.		Designation: Federl. SMC-B 26-SMD-BA7-13 / *Female SMC-B 26-SMD-type7-13*
		ERNI www.ERNI.com	100300280001 K
f 13.01.2014			A3
Index Date			Class SMCB

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.