
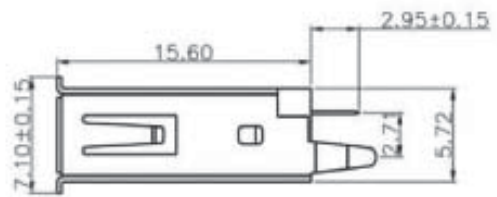


RECOMMENDED PCB LAYOUT

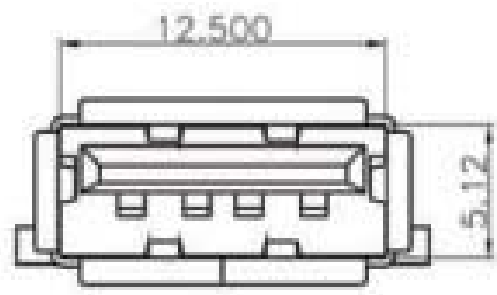

NOTES:

- Insulator: PBT
- Contacts: Phosphorbronze, t=0.25mm
- Shell: Brass t=0.3 / Finish: Nickel Plated
- Withstanding Voltage: 500V AC (1 min)
- Insulation Resistance: 1000M min.
- Rated Voltage and Current: 1.5A at 250V AC min.
- Operating Temperature -55°to + 85°C

Unit: mm



| | | | | | | | | | | |
|------------------|-------|-----|--------------|------|------|--|----------|----------|--|----------|
| Scale | 1:1 | | | | | | Date | Name | Title USB connector -Top Entry Female, A type ASSMANN WSW-No. A-USB-A-TOP (Type A, Version 1.1 5µ" Gold) A-USB/2-A-TOP (Type A, Version 2.0, 30µ" Gold) | |
| TOLERANCE | | | | | | | Drawn | 19.10.11 | | Chappell |
| X.X | ±0.40 | | | | | | Approved | | | |
| X.XXX | ±0.15 | | | | | | | | | |
| DIM | TOL | | | | | | | | Drawing-No. | |
| X.° | ±3° | | | | | | | | | rev00 |
| X.X° | ±X° | | | | | | | | | Sheet |
| Angle | TOL | Id. | Modification | Date | Name | | | | 1/1 | |

