



IFS-0504 Version: 1

## 5-Port Industrial Fast Ethernet Switch, 1 x ST Multi-Mode Fiber, 2km

The LevelOne IFS-0504 Industrial Fast Ethernet Switch provides four ports at 10/100M TX and one multi-modal fiber port at 100M FX ST to enable high speed networks in mission-critical environments. With an industrial standard DIN-rail mount, this switch can be installed in a cabinet, and clearly visible status LEDs provide simple monitoring of port link activity. The multi-modal fiber port allows for large-scale connections of up to 2km. The switch is housed in a solid metal case rated at IP30, keeping it safe from dust, vibration, heat and humidity, while an operational temperature range of -40°C to +75°C makes it suitable for deployment in almost any environment.

### Key Features

- Multi-mode fiber with ST connector for transmission of up to 2km
- Provides flexibility of 4 x 10/100BASE-TX ports
- 10/100Mbps-Full/Half-duplex, Auto-Negotiation, Auto-MDI/MDIX
- -40°C to 75°C (-40°F to 167°F) operating temperature range
- Provides DIN-rail, wall or desktop mounting
- IP30 metal case
- Redundant power inputs with Terminal Block
- Supports 9 to 56VDC power inputs

### Specifications

#### System Specifications

##### Standards & Protocols:

IEEE 802.3 10Base-T Ethernet  
 IEEE 802.3u 100Base-TX Fast Ethernet  
 IEEE 802.3u 100Base-FX Fast Ethernet  
 IEEE802.3x Flow Control and Back Pressure

##### Memory:

1M

##### Buffer Memory:

1M

##### Connectors and Cabling:

4 x 10/100M TX  
 1 x 100M ST MM 2km  
 1 x Terminal block

**Indicator:**

PW1 (Power 1) : Green / PW2 (Power 2) : Green /  
SW( Relay) : Amber  
LNK (RJ45) : Green  
SFP : Green (Link / Active)

**Transmission Method:**

Store-and-Forward

**Power:**

Redundant Dual DC 9V-56V  
Alarm Relay Output 1A @ 24VDC

**Performance****Backplane (Gbps):**

1G

**MAC Address Table:**

1K

**Data Transfer Rate:**

10/100Mbps

**Packet Forwarding Rate:**

100Mbps port - 148,000pps  
10Mbps port - 14,880pps

**Environment****Temperature (°C):**

Operating: - 40°C ~ 75°C  
Storage: - 40°C ~ 85°C

**Humidity (Non-condensing):**

Storage: 5% ~ 95%  
Operating: 5% ~ 95%

**Deployment:**

Desk, din rail, wall mount

**Physical Specifications****Dimensions (W x D x H mm):**

36.2 x 105 x 142 mm

**Weight (g):**

460 g


**Reliability****MTBF:**

150,000 hrs at 25°C

**Others****Approval and Compliance:**

FCC, CE, RoHS, VCCI, Safety EN60950-1  
EN55022/24  
EN55011  
EN50121-3-2  
EN50121-4 (pending)  
EN50155 (pending)  
EN60068-2-6  
EN60068-2-27  
EN60068-2-32

## Diagram

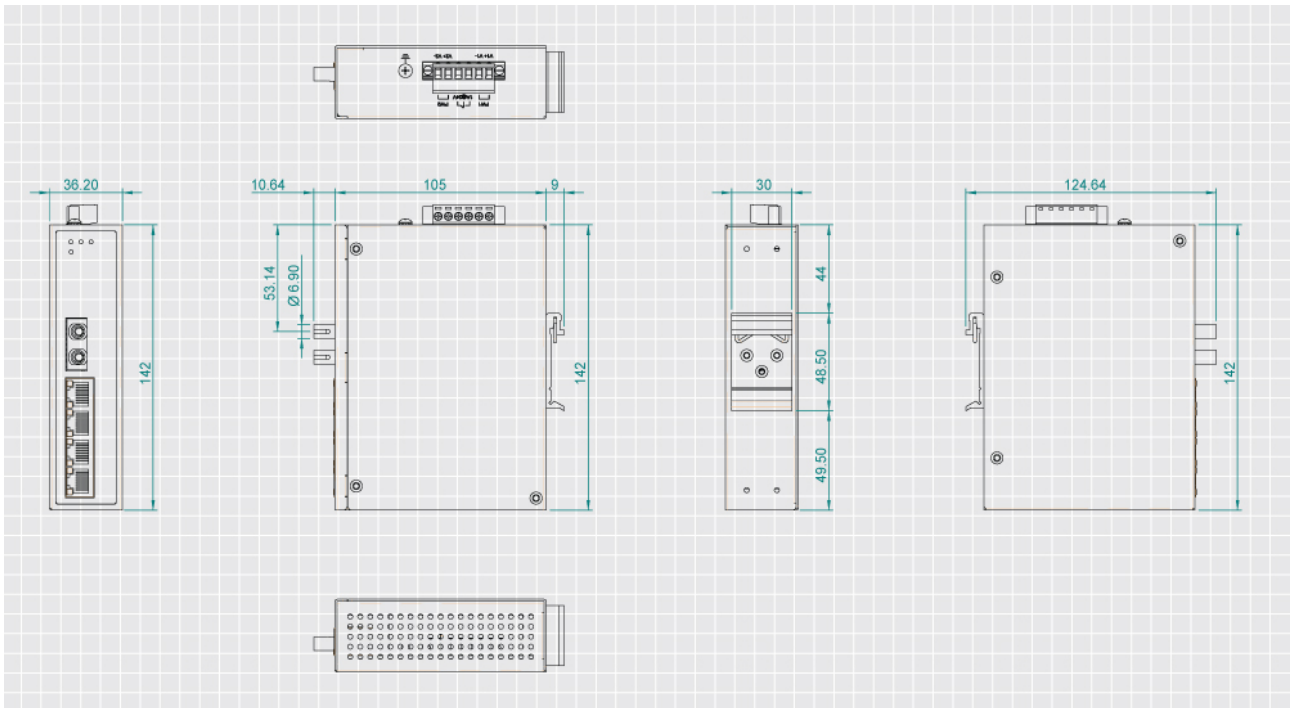

## Order Information

IFS-0504

## Package Contents

IFS-0504  
Power Terminal Block  
Mounting Kit  
Quick Installation Guide

## Optional Accessory



### POW-2410

Industrial Power Supply, 24VDC, 30W, DIN-Rail



### POW-2420

Industrial Power Supply, 60W, 24VDC, DIN-Rail



### POW-2430

Industrial Power Supply, 24VDC, 75W, DIN-Rail



**POW-2440**

Industrial Power Supply, 120W, 24VDC, DIN-Rail



**POW-4801**

48V DC Power Adapter



**POW-4810**

Industrial Power Supply, 48VDC, 40W, DIN-Rail, PoE Ready



**POW-4820**

Industrial Power Supply, 48VDC, 75W, DIN-Rail, PoE Ready



**POW-4830**

Industrial Power Supply, 48VDC, 85W, DIN-Rail, PoE Ready



**POW-4840**

Industrial Power Supply, 120W, 48VDC, DIN-Rail, PoE Ready



**POW-4850**

Industrial Power Supply, 48VDC, 240W, DIN-Rail, PoE Ready



**POW-4860**

Industrial Power Supply, 48VDC, 480W, DIN-Rail, PoE Ready



## **POW-5510**

Industrial Power Supply, 55VDC, 85W, DIN-Rail

No liability or responsibility for any errors or omissions in the content.  
Specifications are subject to change without notice.  
All mentioned brand names are registered trademarks and property of their owners.  
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.