

TSP0080SB-TSP4200SB

Surface Mount

Thyristor Surge Protective Devices

Description

TSP0080SB – TSP4200SB Series are designed to protect broadband equipment such as modems, line card, CPE and DSL from damaging over-voltage transients.

The series provides a surface mount solution that enables equipment to comply with global regulatory standards.

Features


- Low voltage overshoot
- Low on-state voltage
- Does not degrade surge capability after multiple surge events within limit
- Fails short circuit when surged in excess of ratings
- Low Capacitance
- RoHS compliant package

Applications

- TIA-968-A
- ITU K.20/21 Enhanced level
- ITU K.20/21 Basic Level
- GR 1089 Inter building
- GR 1089 Inter building
- IEC 6100-4-5
- YD/T 1082 YD/T 993 YD/T 950


Packing Information

3,000/Reel




RoHS
COMPLIANT

DO-214AA (SMB)

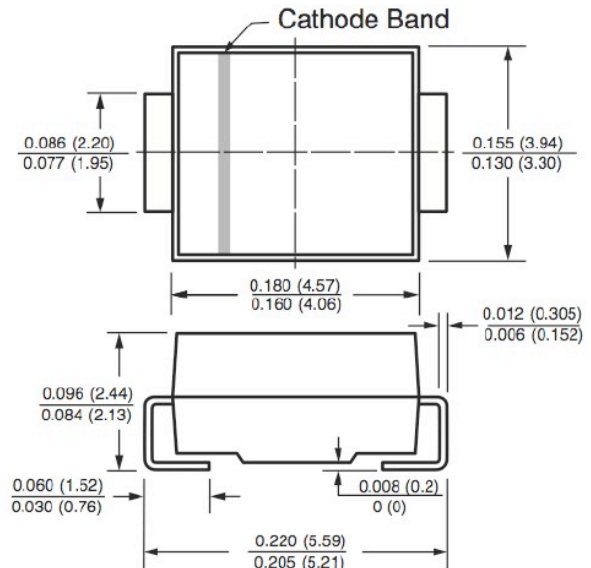

Graphic symbol



TSP0080SB-TSP4200SB

Surface Mount

Thyristor Surge Protective Devices


MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Absolute ratings @25°C Unless Otherwise Specified

Symbol	Parameter	Value	Unit
T_S	Storage Temperature Range	-55 to +150	°C
T_J	Maximum Junction Temperature	150	°C
I_{PP}	Repetitive peak pulse current	10/1000µs 10/560µs 10/160µs 8/20µs 2/10µs	75 100 150 250 250 A
I_{TSM}	Non repetitive surge peak on-state current (sinusoidal)	t= 1s	8 A

Electrical Parameter

Symbol	Parameter
V_{RM}	Stand-off voltage
V_{BR}	Breakdown voltage
V_{BO}	Breakover voltage
I_{RM}	Leakage current
I_{PP}	Peak pulse current
I_{BO}	Breakover current
I_H	Holding current
V_R	Continuous reverse voltage
I_R	Leakage current at V_R
C_0	Capacitance

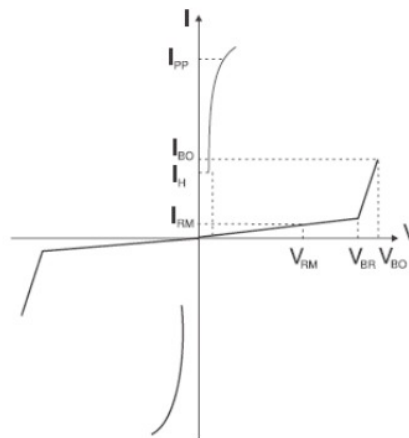

Electrical Characteristics

Part Numbers	VRM	IRM	VBO	IBO	VT	IT	Co	IH
	Min.	Max.	Max.	Max.	Max.	Max.	Max	Min.
	V	Ua	V	mA	V	A	pF	mA
TSP0080SB	6	2	15	800	2	1	80	50
TSP2600SB	220	2	300	800	2.2	1	60	150
TSP3500SB	320	5	400	800	2.2	1	25	150
TSP4200SB	390	5	500	800	2.2	1	25	150

TSP0080SB-TSP4200SB

Surface Mount

Thyristor Surge Protective Devices

■ Characteristics Curves

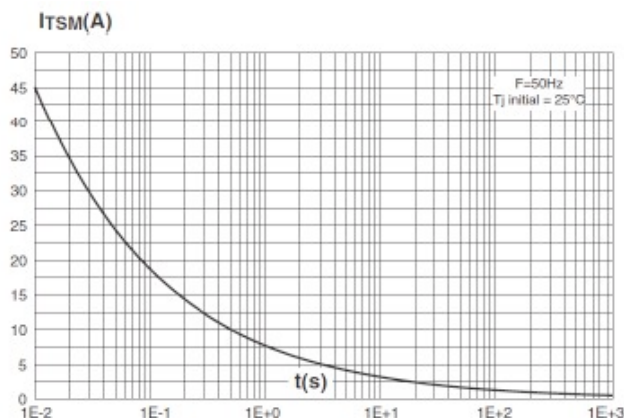


FIG.1- NON-REPETITIVE SURGE PEAK ON-STATE CURRENT VERSUS OVERLOAD DURATION

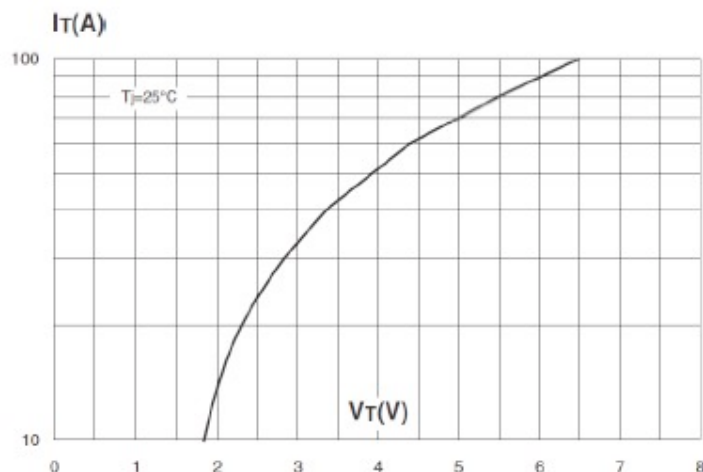


FIG.2- ON-STATE CURRENT VERSUS ON-STATE VOLTAGE (TYPICAL VALUES)

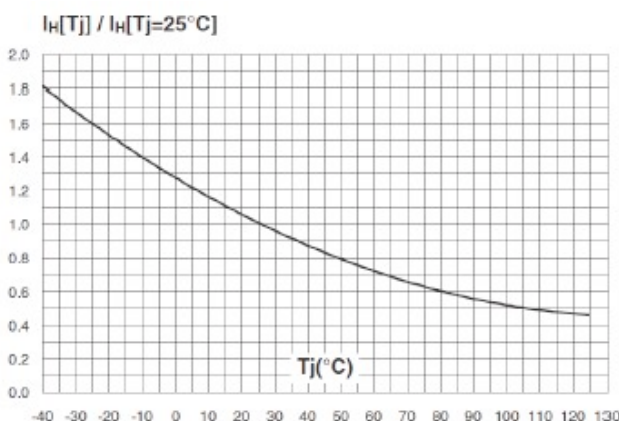


FIG.3- RELATIVE VARIATION OF HOLDING CURRENT VERSUS JUNCTION TEMPERATURE

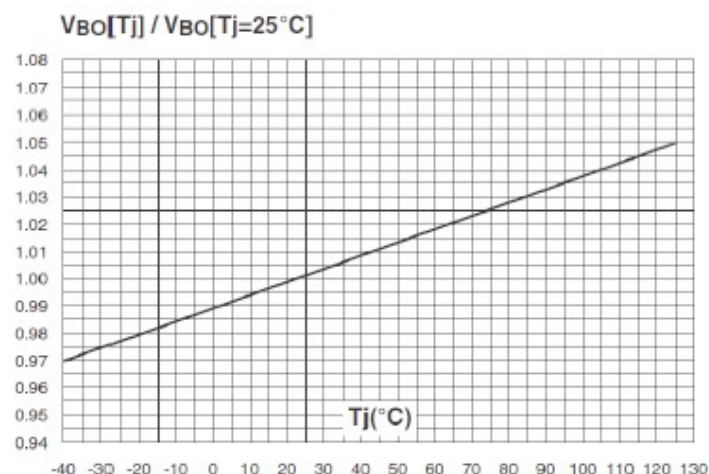


FIG.4- RELATIVE VARIATION OF BREAK OVER VOLTAGE VERSUS JUNCTION TEMPERATURE

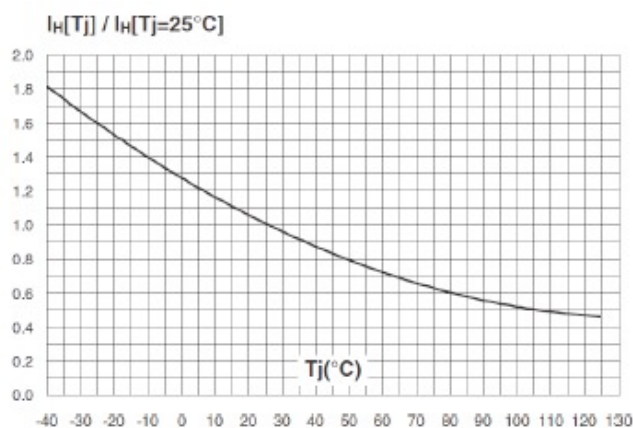


FIG.5- RELATIVE VARIATION OF HOLDING CURRENT VERSUS JUNCTION TEMPERATURE

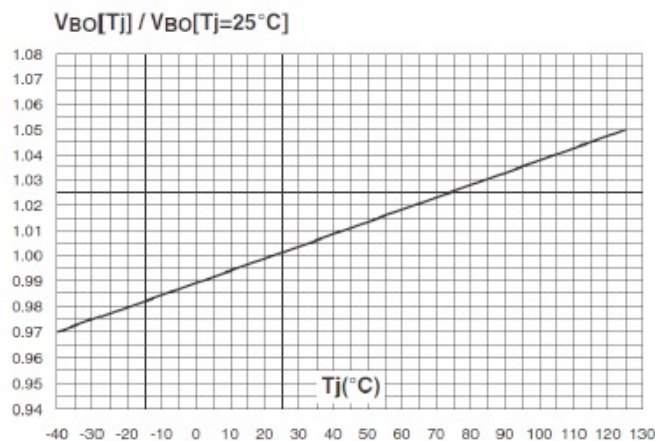


FIG.4- RELATIVE VARIATION OF BREAK OVER VOLTAGE VERSUS JUNCTION TEMPERATURE

TSP0080SB-TSP4200SB

Surface Mount

Thyristor Surge Protective Devices

■ Characteristics Curves

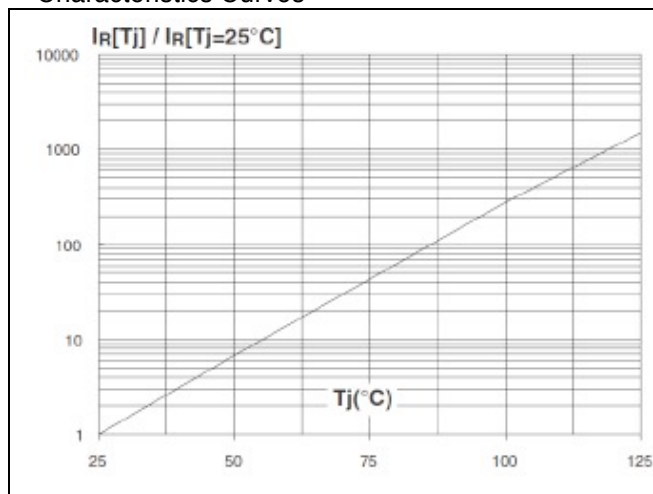


FIG.7- RELATIVE VARIATION OF LEAKAGE CURRENT VERSUS REVERSE VOLTAGE APPLIED(TYPICAL VALUE)

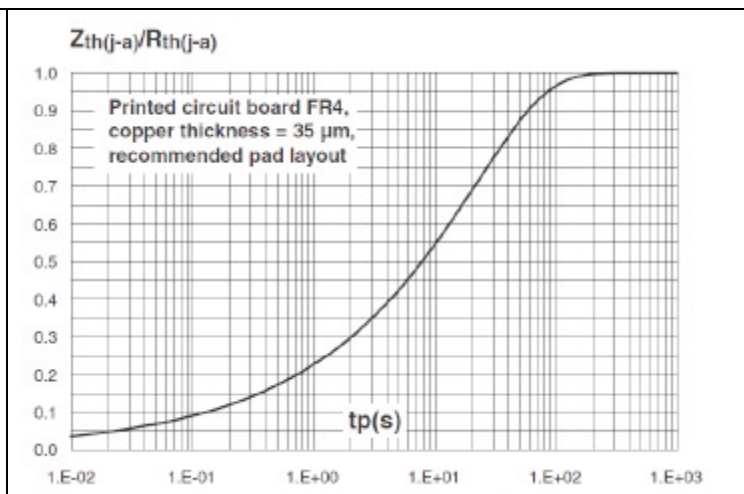


FIG.8- VARIATION OF THERMAL IMPEDANCE JUNCTION TO AMBIENT VERSUS PULSE DURATION

TSP0080SB-TSP4200SB

Surface Mount

Thyristor Surge Protective Devices

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Bruckewell Technology Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Bruckewell"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Bruckewell makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Bruckewell disclaims

- (i) Any and all liability arising out of the application or use of any product.
- (ii) Any and all liability, including without limitation special, consequential or incidental damages.
- (iii) Any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Bruckewell's knowledge of typical requirements that are often placed on Bruckewell products in generic applications.

Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time.

Product specifications do not expand or otherwise modify Bruckewell's terms and conditions of purchase, including but not limited to the warranty expressed therein.