

Silicon NPN Power Transistors

2SD1788

DESCRIPTION

- With ITO-220 package
- Switching power transistor
- DARLINGTON

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

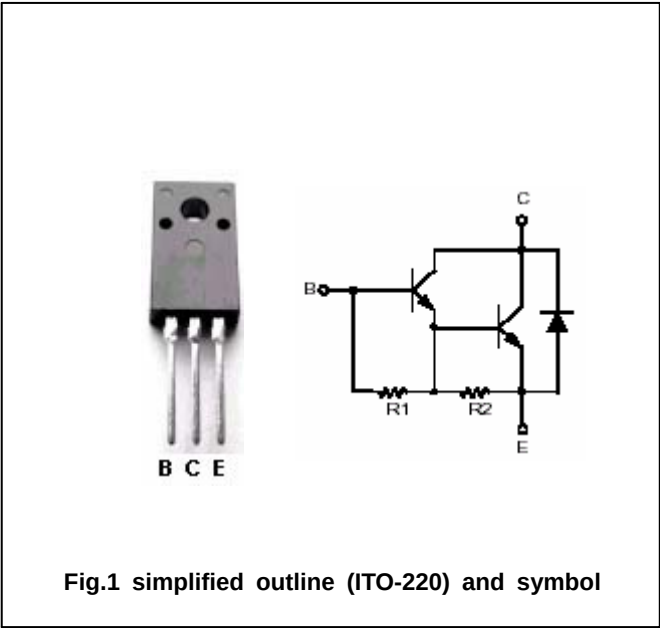


Fig.1 simplified outline (ITO-220) and symbol

Absolute maximum ratings(Ta=25°C)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CBO}	Collector-base voltage	Open emitter	100	V
V _{CEO}	Collector-emitter voltage	Open base	100	V
V _{EBO}	Emitter-base voltage	Open collector	7	V
I _C	Collector current		±4	A
I _{CM}	Collector current-Peak		±6	A
I _B	Base current		0.3	A
I _{BM}	Base current-Peak		0.5	A
P _T	Total power dissipation	T _C =25°C	25	W
T _j	Junction temperature		150	°C
T _{stg}	Storage temperature		-55~150	°C

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R _{th j-c}	Thermal resistance junction to case	5.0	°C/W

Silicon NPN Power Transistors

2SD1788

CHARACTERISTICS

Tj=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V_{CEsat}	Collector-emitter saturation voltage	$I_C=1A$; $I_B=2mA$			1.5	V
V_{BEsat}	Base-emitter saturation voltage	$I_C=1A$; $I_B=2mA$			2.0	V
I_{CBO}	Collector cut-off current	$V_{CB}=100V$; $I_E=0$			0.1	mA
I_{CEO}	Collector cut-off current	$V_{CE}=100V$; $I_B=0$			0.1	mA
I_{EBO}	Emitter cut-off current	$V_{EB}=7V$; $I_C=0$			5	mA
h_{FE}	DC current gain	$I_C=1A$; $V_{CE}=3V$	1500		30000	
f_T	Transition frequency	$I_C=0.4A$; $V_{CE}=10V$		20		MHz

Switching times

t_{on}	Turn-on time	$I_C=1A$; $I_{B1}=I_{B2}=2mA$, $R_L=25\Omega$; $V_{BB2}=4V$			2.0	μs
t_s	Storage time				12	μs
t_f	Fall time				5.0	μs

Silicon NPN Power Transistors

2SD1788

PACKAGE OUTLINE

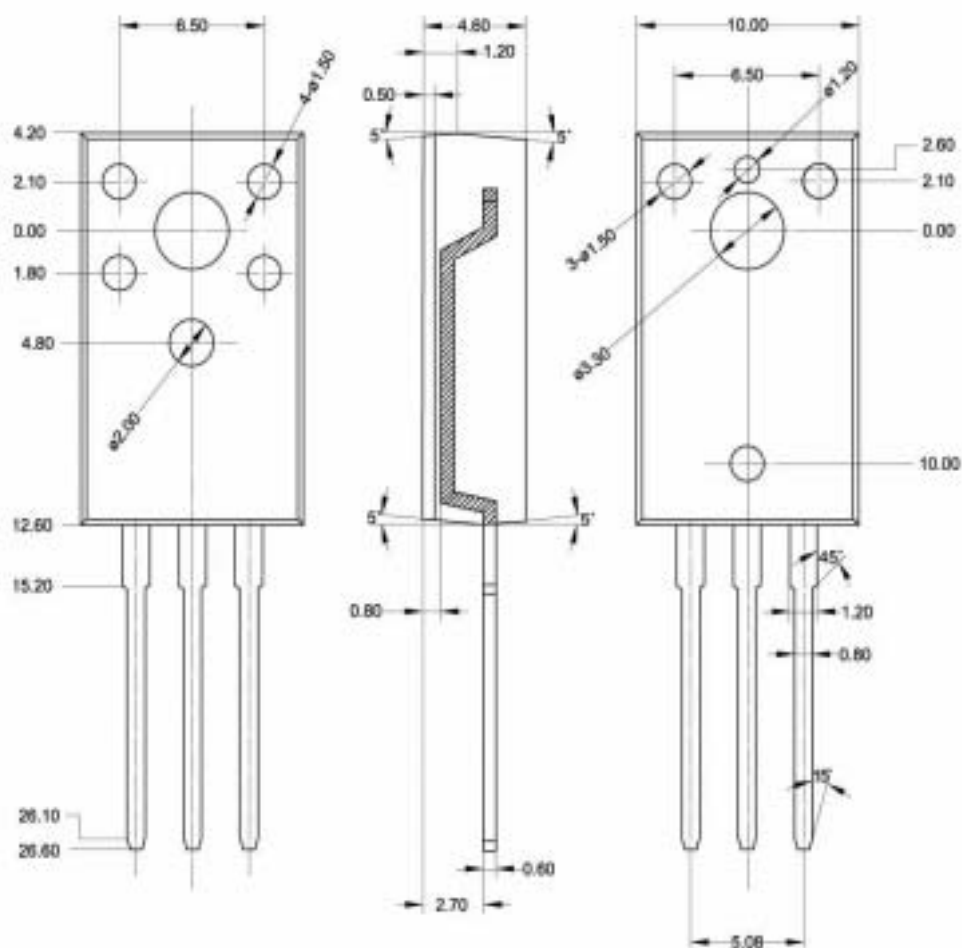


Fig.2 Outline dimensions (unindicated tolerance: ± 0.20 mm)