

# ON Semiconductor

## Is Now



To learn more about onsemi™, please visit our website at  
[www.onsemi.com](http://www.onsemi.com)

onsemi and onsemi. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application, Buyer shall indemnify and hold onsemi and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that onsemi was negligent regarding the design or manufacture of the part. onsemi is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner. Other names and brands may be claimed as the property of others.

# CAT93C76B

## EEPROM Serial 8-Kb Microwire

### Description

The CAT93C76B is an 8-Kb Microwire Serial EEPROM memory device which is configured as either registers of 16 bits (ORG pin at V<sub>CC</sub> or Not Connected) or 8 bits (ORG pin at GND). Each register can be written (or read) serially by using the DI (or DO) pin. The CAT93C76B is manufactured using ON Semiconductor's advanced CMOS EEPROM floating gate technology. The device is designed to endure 1,000,000 program/erase cycles and has a data retention of 100 years. The device is available in 8-pin PDIP, SOIC, TSSOP, MSOP and 8-pad UDFN packages.

### Features

- High Speed Operation: 4 MHz (5 V), 2 MHz (1.8 V)
- 1.8 V (1.65 V\*) to 5.5 V Supply Voltage Range
- Selectable x8 or x16 Memory Organization
- Self-timed Write Cycle with Auto-clear
- Software Write Protection
- Power-up Inadvertant Write Protection
- Low Power CMOS Technology
- 1,000,000 Program/Erase Cycles
- 100 Year Data Retention
- Industrial and Extended Temperature Ranges
- Sequential Read
- 8-pin PDIP, SOIC, TSSOP, MSOP and 8-Pad UDFN Packages
- This Device is Pb-Free, Halogen Free/BFR Free and RoHS Compliant†

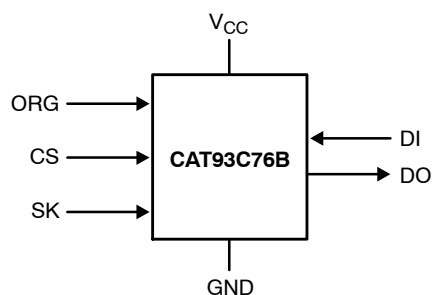


Figure 1. Functional Symbol

\*CAT93C76Bxx-xxL (T<sub>A</sub> = -20°C to +85°C)

†For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.



ON Semiconductor®


[www.onsemi.com](http://www.onsemi.com)




SOIC-8  
V SUFFIX  
CASE 751BD



UDFN-8  
HU4 SUFFIX  
CASE 517AZ



PDIP-8  
L SUFFIX  
CASE 646AA




TSSOP-8  
Y SUFFIX  
CASE 948AL



MSOP-8  
Z SUFFIX  
CASE 846AD

### PIN CONFIGURATION

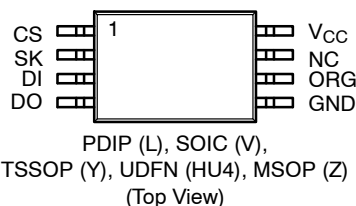

### PIN FUNCTION

| Pin Name        | Function            |
|-----------------|---------------------|
| CS              | Chip Select         |
| SK              | Serial Clock Input  |
| DI              | Serial Data Input   |
| DO              | Serial Data Output  |
| V <sub>CC</sub> | Power Supply        |
| GND             | Ground              |
| ORG             | Memory Organization |
| NC              | No Connection       |

**NOTE:** When the ORG pin is connected to V<sub>CC</sub>, the x16 organization is selected. When it is connected to ground, the x8 organization is selected. If the ORG pin is left unconnected, then an internal pull-up device will select the x16 organization.

### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 8 of this data sheet.

**Table 1. ABSOLUTE MAXIMUM RATINGS**

| Parameters                                         | Ratings                       | Units |
|----------------------------------------------------|-------------------------------|-------|
| Temperature Under Bias                             | -55 to +125                   | °C    |
| Storage Temperature                                | -65 to +150                   | °C    |
| Voltage on any Pin with Respect to Ground (Note 1) | -2.0 to +V <sub>CC</sub> +2.0 | V     |
| V <sub>CC</sub> with Respect to Ground             | -2.0 to +7.0                  | V     |
| Lead Soldering Temperature (10 seconds)            | 300                           | °C    |
| Output Short Circuit Current (Note 2)              | 100                           | mA    |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. The minimum DC input voltage is -0.5 V. During transitions, inputs may undershoot to -2.0 V for periods of less than 20 ns. Maximum DC voltage on output pins is V<sub>CC</sub> +0.5 V, which may overshoot to V<sub>CC</sub> +2.0 V for periods of less than 20 ns.
2. Output shorted for no more than one second.

**Table 2. RELIABILITY CHARACTERISTICS (Note 2)**

| Symbol                        | Parameter          | Reference Test Method         | Min       | Units         |
|-------------------------------|--------------------|-------------------------------|-----------|---------------|
| N <sub>END</sub> (Note 3)     | Endurance          | MIL-STD-883, Test Method 1033 | 1,000,000 | Cycles / Byte |
| T <sub>DR</sub> (Note 3)      | Data Retention     | MIL-STD-883, Test Method 1008 | 100       | Years         |
| V <sub>ZAP</sub> (Note 3)     | ESD Susceptibility | MIL-STD-883, Test Method 3015 | 2,000     | V             |
| I <sub>LTH</sub> (Notes 3, 4) | Latch-Up           | JEDEC Standard 17             | 100       | mA            |

3. These parameters are tested initially and after a design or process change that affects the parameter.
4. Latch-up protection is provided for stresses up to 100 mA on I/O pins from -1 V to V<sub>CC</sub> + 1 V.

**Table 3. D.C. OPERATING CHARACTERISTICS**

(V<sub>CC</sub> = +1.8 V to +5.5 V, T<sub>A</sub> = -40°C to +125°C, V<sub>CC</sub> = +1.65 V to +5.5 V, T<sub>A</sub> = -20°C to +85°C unless otherwise specified.)

| Symbol           | Parameter                  | Test Conditions                                                                         | Min                                                                 | Max                   | Units |
|------------------|----------------------------|-----------------------------------------------------------------------------------------|---------------------------------------------------------------------|-----------------------|-------|
| I <sub>CC1</sub> | Supply Current (Write)     | Write, V <sub>CC</sub> = 5.0 V                                                          |                                                                     | 2                     | mA    |
| I <sub>CC2</sub> | Supply Current (Read)      | Read, DO open, f <sub>SK</sub> = 2 MHz, V <sub>CC</sub> = 5.0 V                         |                                                                     | 500                   | μA    |
| I <sub>SB1</sub> | Standby Current (x8 Mode)  | V <sub>IN</sub> = GND or V <sub>CC</sub><br>CS = GND, ORG = GND                         | T <sub>A</sub> = -40°C to +85°C<br>T <sub>A</sub> = -40°C to +125°C | 2<br>5                | μA    |
| I <sub>SB2</sub> | Standby Current (x16 Mode) | V <sub>IN</sub> = GND or V <sub>CC</sub><br>CS = GND,<br>ORG = Float or V <sub>CC</sub> | T <sub>A</sub> = -40°C to +85°C<br>T <sub>A</sub> = -40°C to +125°C | 1<br>3                | μA    |
| I <sub>LI</sub>  | Input Leakage Current      | V <sub>IN</sub> = GND to V <sub>CC</sub>                                                | T <sub>A</sub> = -40°C to +85°C<br>T <sub>A</sub> = -40°C to +125°C | 1<br>2                | μA    |
| I <sub>LO</sub>  | Output Leakage Current     | V <sub>OUT</sub> = GND to V <sub>CC</sub><br>CS = GND                                   | T <sub>A</sub> = -40°C to +85°C<br>T <sub>A</sub> = -40°C to +125°C | 1<br>2                | μA    |
| V <sub>IL1</sub> | Input Low Voltage          | 4.5 V ≤ V <sub>CC</sub> < 5.5 V                                                         | -0.1                                                                | 0.8                   | V     |
| V <sub>IH1</sub> | Input High Voltage         | 4.5 V ≤ V <sub>CC</sub> < 5.5 V                                                         | 2                                                                   | V <sub>CC</sub> + 1   | V     |
| V <sub>IL2</sub> | Input Low Voltage          | 1.65 V ≤ V <sub>CC</sub> < 4.5 V                                                        | 0                                                                   | V <sub>CC</sub> × 0.2 | V     |
| V <sub>IH2</sub> | Input High Voltage         | 1.65 V ≤ V <sub>CC</sub> < 4.5 V                                                        | V <sub>CC</sub> × 0.7                                               | V <sub>CC</sub> + 1   | V     |
| V <sub>OL1</sub> | Output Low Voltage         | 4.5 V ≤ V <sub>CC</sub> < 5.5 V, I <sub>OL</sub> = 3 mA                                 |                                                                     | 0.4                   | V     |
| V <sub>OH1</sub> | Output High Voltage        | 4.5 V ≤ V <sub>CC</sub> < 5.5 V, I <sub>OH</sub> = -400 μA                              | 2.4                                                                 |                       | V     |
| V <sub>OL2</sub> | Output Low Voltage         | 1.65 V ≤ V <sub>CC</sub> < 4.5 V, I <sub>OL</sub> = 1 mA                                |                                                                     | 0.2                   | V     |
| V <sub>OH2</sub> | Output High Voltage        | 1.65 V ≤ V <sub>CC</sub> < 4.5 V, I <sub>OH</sub> = -100 μA                             | V <sub>CC</sub> - 0.2                                               |                       | V     |

**Table 4. PIN CAPACITANCE (Note 3)**

| Symbol           | Test                                | Conditions             | Min | Typ | Max | Units |
|------------------|-------------------------------------|------------------------|-----|-----|-----|-------|
| C <sub>OUT</sub> | Output Capacitance (DO)             | V <sub>OUT</sub> = 0 V |     |     | 5   | pF    |
| C <sub>IN</sub>  | Input Capacitance (CS, SK, DI, ORG) | V <sub>IN</sub> = 0 V  |     |     | 5   | pF    |

# CAT93C76B

**Table 5. INSTRUCTION SET** (Note 5)

| Instruction | Start Bit | Opcode | Address      |              | Data  |        | Comments             |
|-------------|-----------|--------|--------------|--------------|-------|--------|----------------------|
|             |           |        | x8           | x16          | x8    | x16    |                      |
| READ        | 1         | 10     | A10–A0       | A9–A0        |       |        | Read Address AN– A0  |
| ERASE       | 1         | 11     | A10–A0       | A9–A0        |       |        | Clear Address AN– A0 |
| WRITE       | 1         | 01     | A10–A0       | A9–A0        | D7–D0 | D15–D0 | Write Address AN– A0 |
| EWEN        | 1         | 00     | 11XXXXXXXXXX | 11XXXXXXXXXX |       |        | Write Enable         |
| EWDS        | 1         | 00     | 00XXXXXXXXXX | 00XXXXXXXXXX |       |        | Write Disable        |
| ERAL*       | 1         | 00     | 10XXXXXXXXXX | 10XXXXXXXXXX |       |        | Clear All Addresses  |
| WRAL*       | 1         | 00     | 01XXXXXXXXXX | 01XXXXXXXXXX | D7–D0 | D15–D0 | Write All Addresses  |

\* Not available at  $V_{CC} < 1.8\text{ V}$

5. Address bit A10 for the 1,024x8 org. and A9 for the 512x16 org. are “don’t care” bits, but must be kept at either a “1” or “0” for READ, WRITE and ERASE commands.

**Table 6. A.C. CHARACTERISTICS**

( $V_{CC} = +1.8\text{ V}$  to  $+5.5\text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+125^\circ\text{C}$ ,  $V_{CC} = +1.65\text{ V}$  to  $+5.5\text{ V}$ ,  $T_A = -20^\circ\text{C}$  to  $+85^\circ\text{C}$  unless otherwise specified.)

| Symbol            | Parameter                    | $V_{CC} < 4.5\text{ V}$ |      | $V_{CC} > 4.5\text{ V}$ |      | Units         |
|-------------------|------------------------------|-------------------------|------|-------------------------|------|---------------|
|                   |                              | Min                     | Max  | Min                     | Max  |               |
| $t_{CSS}$         | CS Setup Time                | 50                      |      | 50                      |      | ns            |
| $t_{CSH}$         | CS Hold Time                 | 0                       |      | 0                       |      | ns            |
| $t_{DIS}$         | DI Setup Time                | 100                     |      | 50                      |      | ns            |
| $t_{DIH}$         | DI Hold Time                 | 100                     |      | 50                      |      | ns            |
| $t_{PD1}$         | Output Delay to 1            |                         | 0.25 |                         | 0.1  | $\mu\text{s}$ |
| $t_{PD0}$         | Output Delay to 0            |                         | 0.25 |                         | 0.1  | $\mu\text{s}$ |
| $t_{HZ}$ (Note 6) | Output Delay to High–Z       |                         | 100  |                         | 100  | ns            |
| $t_{EW}$          | Program/Erase Pulse Width    |                         | 5    |                         | 5    | ms            |
| $t_{CSMIN}$       | Minimum CS Low Time          | 0.25                    |      | 0.1                     |      | $\mu\text{s}$ |
| $t_{SKHI}$        | Minimum SK High Time         | 0.25                    |      | 0.1                     |      | $\mu\text{s}$ |
| $t_{SKLOW}$       | Minimum SK Low Time          | 0.25                    |      | 0.1                     |      | $\mu\text{s}$ |
| $t_{SV}$          | Output Delay to Status Valid |                         | 0.25 |                         | 0.1  | $\mu\text{s}$ |
| $SK_{MAX}$        | Maximum Clock Frequency      | DC                      | 2000 | DC                      | 4000 | kHz           |

6. This parameter is tested initially and after a design or process change that affects the parameter.

**Table 7. POWER-UP TIMING** (Notes 6, 7)

| Symbol    | Parameter                   | Max | Units |
|-----------|-----------------------------|-----|-------|
| $t_{PUR}$ | Power-up to Read Operation  | 1   | ms    |
| $t_{PUW}$ | Power-up to Write Operation | 1   | ms    |

7.  $t_{PUR}$  and  $t_{PUW}$  are the delays required from the time  $V_{CC}$  is stable until the specified operation can be initiated.

**Table 8. A.C. TEST CONDITIONS**

|                           |                                                             |                                               |
|---------------------------|-------------------------------------------------------------|-----------------------------------------------|
| Input Rise and Fall Times | $\leq 50\text{ ns}$                                         |                                               |
| Input Pulse Voltages      | 0.4 V to 2.4 V                                              | $4.5\text{ V} \leq V_{CC} \leq 5.5\text{ V}$  |
| Timing Reference Voltages | 0.8 V, 2.0 V                                                | $4.5\text{ V} \leq V_{CC} \leq 5.5\text{ V}$  |
| Input Pulse Voltages      | $0.2 V_{CC}$ to $0.7 V_{CC}$                                | $1.65\text{ V} \leq V_{CC} \leq 4.5\text{ V}$ |
| Timing Reference Voltages | $0.5 V_{CC}$                                                | $1.65\text{ V} \leq V_{CC} \leq 4.5\text{ V}$ |
| Output Load               | Current Source $I_{OLmax}/I_{OHmax}$ ; $CL = 100\text{ pF}$ |                                               |

## Device Operation

The CAT93C76B is a 8192-bit nonvolatile memory intended for use with industry standard microprocessors. The CAT93C76B can be organized as either registers of 16 bits or 8 bits. When organized as X16, seven 13-bit instructions control the read, write and erase operations of the device. When organized as X8, seven 14-bit instructions control the read, write and erase operations of the device. The CAT93C76B operates on a single power supply and will generate on chip, the high voltage required during any write operation.

Instructions, addresses, and write data are clocked into the DI pin on the rising edge of the clock (SK). The DO pin is normally in a high impedance state except when reading data from the device, or when checking the ready/busy status after a write operation.

The ready/busy status can be determined after the start of a write operation by selecting the device (CS high) and polling the DO pin; DO low indicates that the write operation is not completed, while DO high indicates that the device is ready for the next instruction. If necessary, the DO pin may be placed back into a high impedance state during chip select by shifting a dummy "1" into the DI pin. The DO pin will enter the high impedance state on the falling edge of the clock (SK). Placing the DO pin into the high impedance state is recommended in applications where the DI pin and the DO pin are to be tied together to form a common DI/O pin.

The format for all instructions sent to the device is a logical "1" start bit, a 2-bit (or 4-bit) opcode, 10-bit address (an additional bit when organized X8) and for write operations a 16-bit data field (8-bit for X8 organizations). The most significant bit of the address is "don't care" but it must be present.

## Read

Upon receiving a READ command and an address (clocked into the DI pin), the DO pin of the CAT93C76B will come out of the high impedance state and, after sending an initial dummy zero bit, will begin shifting out the data addressed (MSB first). The output data bits will toggle on the rising edge of the SK clock and are stable after the specified time delay ( $t_{PD0}$  or  $t_{PD1}$ ).

For the CAT93C76B, after the initial data word has been shifted out and CS remains asserted with the SK clock continuing to toggle, the device will automatically increment to the next address and shift out the next data word in a sequential READ mode. As long as CS is continuously asserted and SK continues to toggle, the device will keep incrementing to the next address automatically until it reaches the end of the address space, then loops back to address 0. In the sequential READ mode, only the initial data word is preceded by a dummy zero bit. All subsequent data words will follow without a dummy zero bit.

## Write

After receiving a WRITE command, address and the data, the CS (Chip Select) pin must be deselected for a minimum of  $t_{CSMIN}$ . The falling edge of CS will start the self clocking clear and data store cycle of the memory location specified in the instruction. The clocking of the SK pin is not necessary after the device has entered the self clocking mode. The ready/busy status of the CAT93C76B can be determined by selecting the device and polling the DO pin. Since this device features Auto-Clear before write, it is NOT necessary to erase a memory location before it is written into.

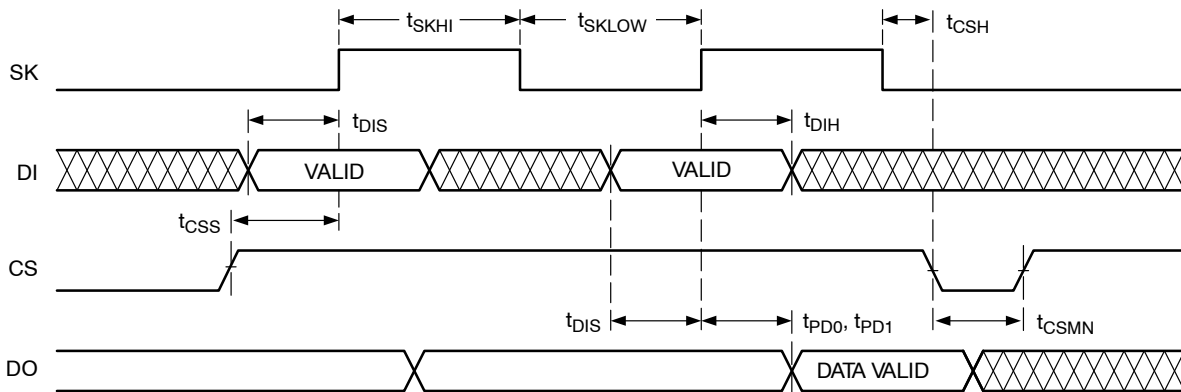


Figure 2. Synchronous Data Timing

# CAT93C76B

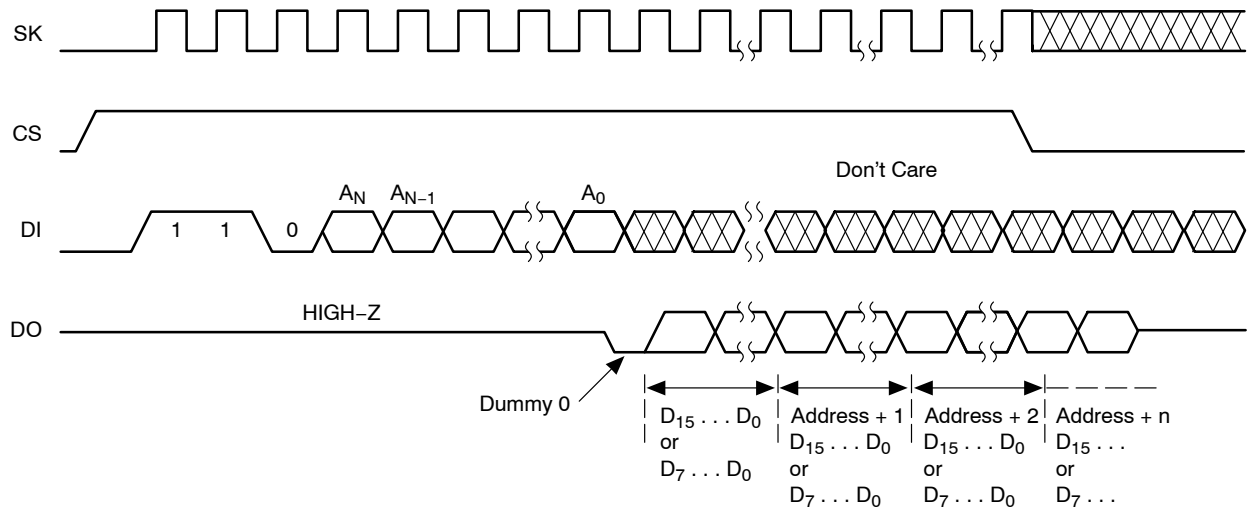


Figure 3. READ Instruction Timing

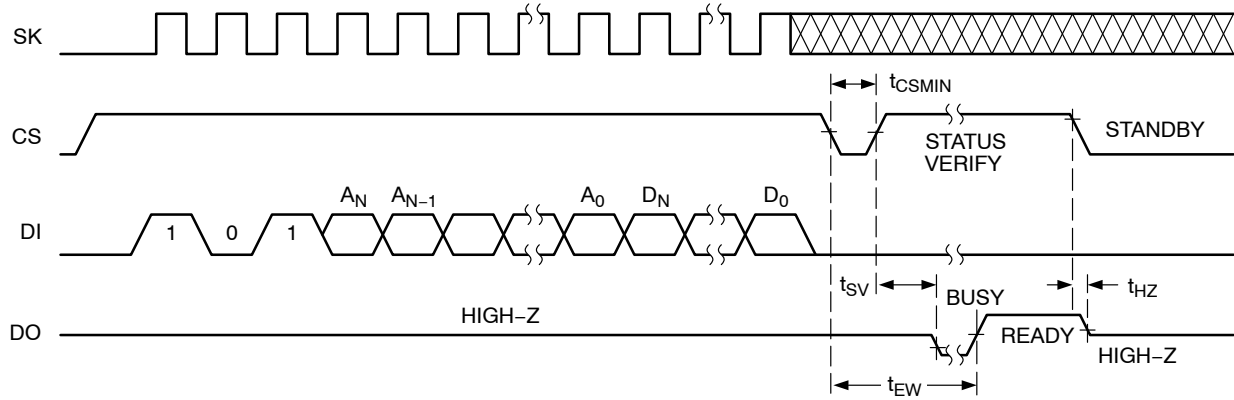


Figure 4. WRITE Instruction Timing

## Erase

Upon receiving an ERASE command and address, the CS (Chip Select) pin must be deasserted for a minimum of  $t_{CSMIN}$ . The falling edge of CS will start the self clocking clear cycle of the selected memory location. The clocking of the SK pin is not necessary after the device has entered the self clocking mode. The ready/busy status of the CAT93C76B can be determined by selecting the device and polling the DO pin. Once cleared, the content of a cleared location returns to a logical “1” state.

## Erase/Write Enable and Disable

The CAT93C76B powers up in the write disable state. Any writing after power-up or after an EWDS (write disable) instruction must first be preceded by the EWEN (write enable) instruction. Once the write instruction is enabled, it will remain enabled until power to the device is removed, or the EWDS instruction is sent. The EWDS instruction can be used to disable all CAT93C76B write and clear instructions, and will prevent any accidental writing or clearing of the device. Data can be read normally from the device regardless of the write enable/disable status.

## Erase All

Upon receiving an ERAL command, the CS (Chip Select) pin must be deselected for a minimum of  $t_{CSMIN}$ . The falling edge of CS will start the self clocking clear cycle of all memory locations in the device. The clocking of the SK pin is not necessary after the device has entered the self clocking mode. The ready/busy status of the CAT93C76B can be

determined by selecting the device and polling the DO pin. Once cleared, the contents of all memory bits return to a logical “1” state.

## Write All

Upon receiving a WRAL command and data, the CS (Chip Select) pin must be deselected for a minimum of  $t_{CSMIN}$ . The falling edge of CS will start the self clocking data write to all memory locations in the device. The clocking of the SK pin is not necessary after the device has entered the self clocking mode. The ready/busy status of the CAT93C76B can be determined by selecting the device and polling the DO pin. It is not necessary for all memory locations to be cleared before the WRAL command is executed.

**Note 1:** After the last data bit has been sampled, Chip Select (CS) must be brought Low before the next rising edge of the clock (SK) in order to start the self-timed high voltage cycle. This is important because if CS is brought low before or after this specific frame window, the addressed location will not be programmed or erased.

## Power-On Reset (POR)

The CAT93C76B incorporates Power-On Reset (POR) circuitry which protects the device against malfunctioning while  $V_{CC}$  is lower than the recommended operating voltage.

The device will power up into a read-only state and will power-down into a reset state when  $V_{CC}$  crosses the POR level of ~1.3 V.

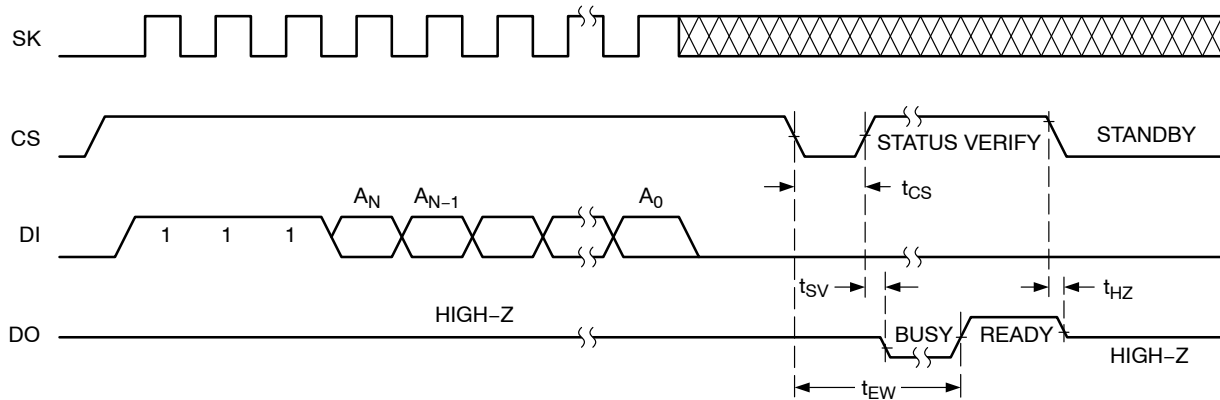


Figure 5. ERASE Instruction Timing

# CAT93C76B

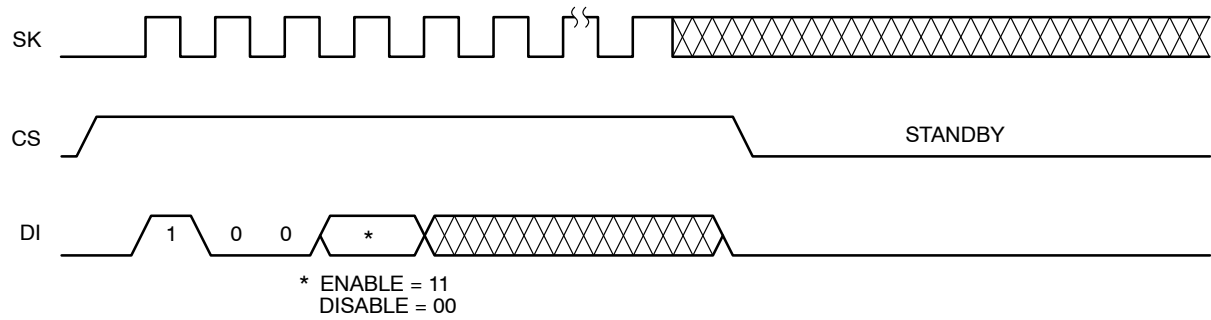


Figure 6. EWEN/EWDS Instruction Timing

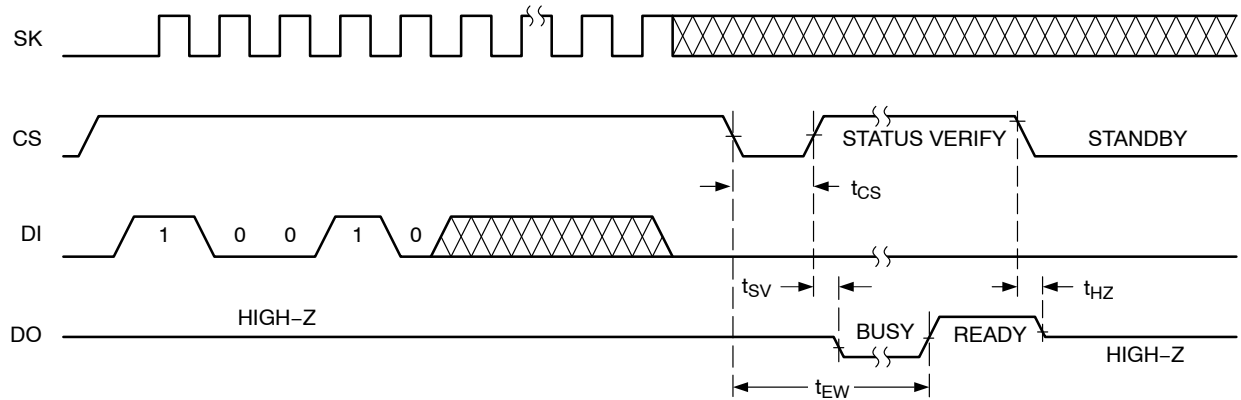


Figure 7. ERAL Instruction Timing

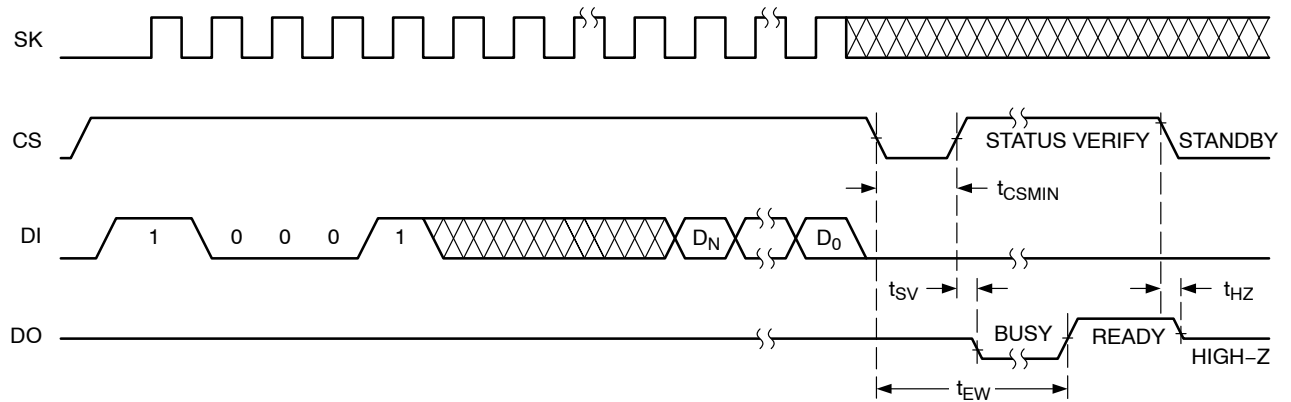


Figure 8. WRAL Instruction Timing

## CAT93C76B

### ORDERING INFORMATION

| Device Order Number | Specific Device Marking | Package Type  | Temperature Range                  | Lead Finish | Shipping                           |
|---------------------|-------------------------|---------------|------------------------------------|-------------|------------------------------------|
| CAT93C76BLI-G       | 93C76D                  | PDIP-8        | I = Industrial<br>(-40°C to +85°C) | NiPdAu      | Tube, 50 Units / Tube              |
| CAT93C76BVI-GT3     | 93C76D                  | SOIC-8, JEDEC | I = Industrial<br>(-40°C to +85°C) | NiPdAu      | Tape & Reel,<br>3,000 Units / Reel |
| CAT93C76BVI-G       | 93C76D                  | SOIC-8, JEDEC | I = Industrial<br>(-40°C to +85°C) | NiPdAu      | Tube, 100 Units / Tube             |
| CAT93C76BVI-GT3L    | 93C76D                  | SOIC-8, JEDEC | I = Industrial<br>(-20°C to +85°C) | NiPdAu      | Tape & Reel,<br>3,000 Units / Reel |
| CAT93C76BVE-GT3     | 93C76D                  | SOIC-8, JEDEC | E = Extended<br>(-40°C to +125°C)  | NiPdAu      | Tape & Reel,<br>3,000 Units / Reel |
| CAT93C76BYI-GT3     | M76D                    | TSSOP-8       | I = Industrial<br>(-40°C to +85°C) | NiPdAu      | Tape & Reel,<br>3,000 Units / Reel |
| CAT93C76BYI-G       | M76D                    | TSSOP-8       | I = Industrial<br>(-40°C to +85°C) | NiPdAu      | Tube, 100 Units / Tube             |
| CAT93C76BYI-GT3L    | M76D                    | TSSOP-8       | I = Industrial<br>(-20°C to +85°C) | NiPdAu      | Tape & Reel,<br>3,000 Units / Reel |
| CAT93C76BYE-GT3     | M76D                    | TSSOP-8       | E = Extended<br>(-40°C to +125°C)  | NiPdAu      | Tape & Reel,<br>3,000 Units / Reel |
| CAT93C76BHU4I-GT3   | M3U                     | UDFN-8        | I = Industrial<br>(-40°C to +85°C) | NiPdAu      | Tape & Reel,<br>3,000 Units / Reel |
| CAT93C76BZI-GT3     | M3YM                    | MSOP-8        | I = Industrial<br>(-40°C to +85°C) | NiPdAu      | Tape & Reel,<br>3,000 Units / Reel |

8. All packages are RoHS-compliant (Lead-free, Halogen-free).

9. The standard lead finish is NiPdAu.

10. For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


11. For additional package and temperature options, please contact your nearest ON Semiconductor sales office.

12. For detailed information and a breakdown of device nomenclature and numbering systems, please see the ON Semiconductor Device Nomenclature document, TND310/D, available at [www.onsemi.com](http://www.onsemi.com)

# CAT93C76B


## PACKAGE DIMENSIONS

PDIP-8, 300 mils  
CASE 646AA-01  
ISSUE A

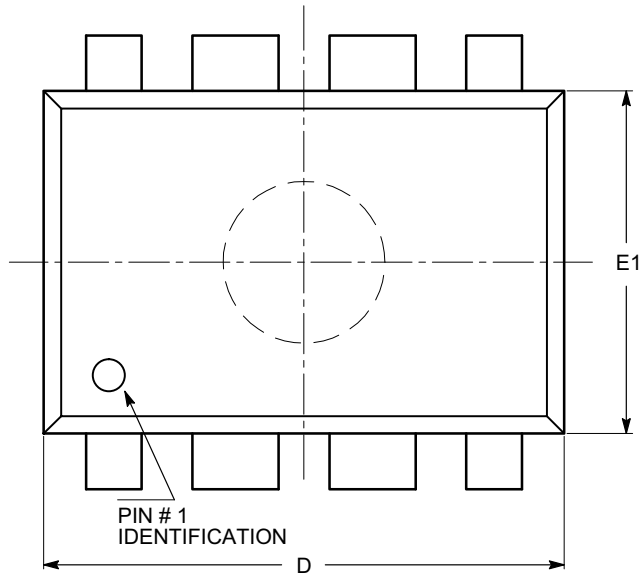


| SYMBOL | MIN      | NOM  | MAX   |
|--------|----------|------|-------|
| A      |          |      | 5.33  |
| A1     | 0.38     |      |       |
| A2     | 2.92     | 3.30 | 4.95  |
| b      | 0.36     | 0.46 | 0.56  |
| b2     | 1.14     | 1.52 | 1.78  |
| c      | 0.20     | 0.25 | 0.36  |
| D      | 9.02     | 9.27 | 10.16 |
| E      | 7.62     | 7.87 | 8.25  |
| E1     | 6.10     | 6.35 | 7.11  |
| e      | 2.54 BSC |      |       |
| eB     | 7.87     |      | 10.92 |
| L      | 2.92     | 3.30 | 3.80  |

TOP VIEW

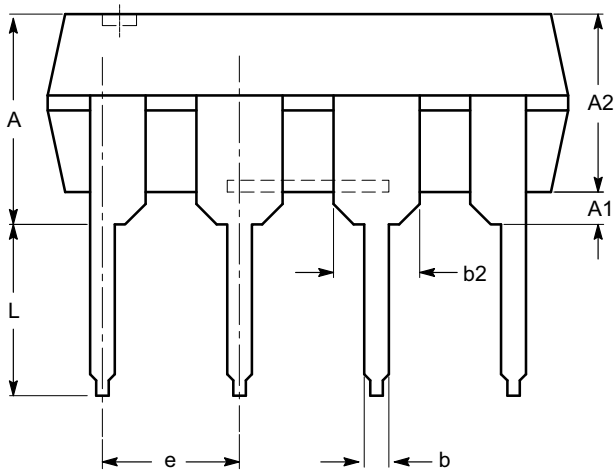

SIDE VIEW

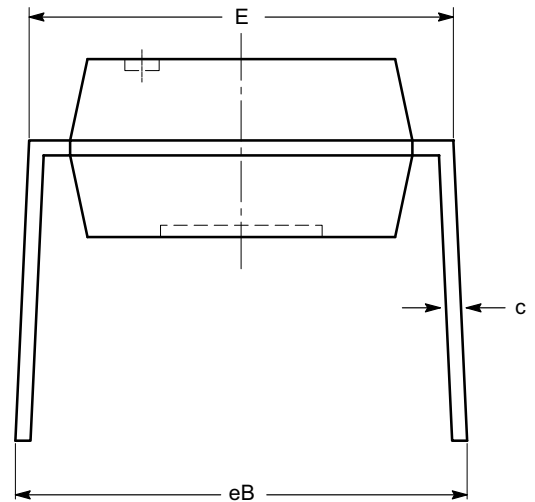

END VIEW


### Notes:

- (1) All dimensions are in millimeters.
- (2) Complies with JEDEC MS-001.

# CAT93C76B


## PACKAGE DIMENSIONS

SOIC 8, 150 mils  
CASE 751BD-01  
ISSUE O

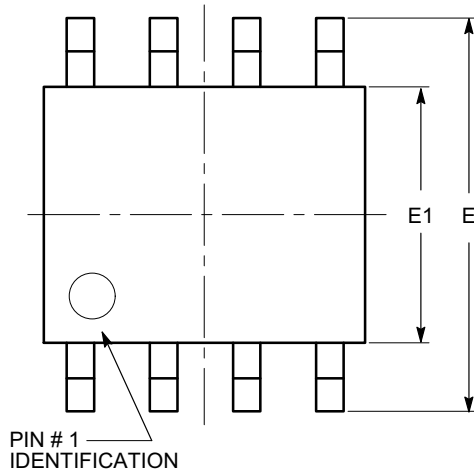


TOP VIEW

| SYMBOL   | MIN      | NOM | MAX  |
|----------|----------|-----|------|
| A        | 1.35     |     | 1.75 |
| A1       | 0.10     |     | 0.25 |
| b        | 0.33     |     | 0.51 |
| c        | 0.19     |     | 0.25 |
| D        | 4.80     |     | 5.00 |
| E        | 5.80     |     | 6.20 |
| E1       | 3.80     |     | 4.00 |
| e        | 1.27 BSC |     |      |
| h        | 0.25     |     | 0.50 |
| L        | 0.40     |     | 1.27 |
| $\theta$ | 0°       |     | 8°   |

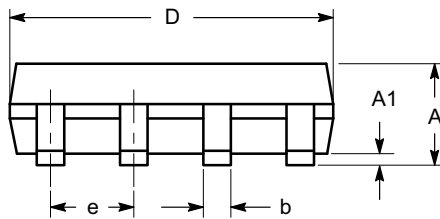

SIDE VIEW

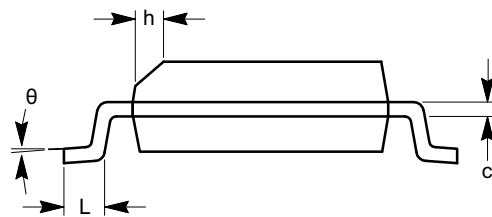

END VIEW


### Notes:

- (1) All dimensions are in millimeters. Angles in degrees.
- (2) Complies with JEDEC MS-012.

# CAT93C76B


## PACKAGE DIMENSIONS

**TSSOP8, 4.4x3**  
CASE 948AL-01  
ISSUE O

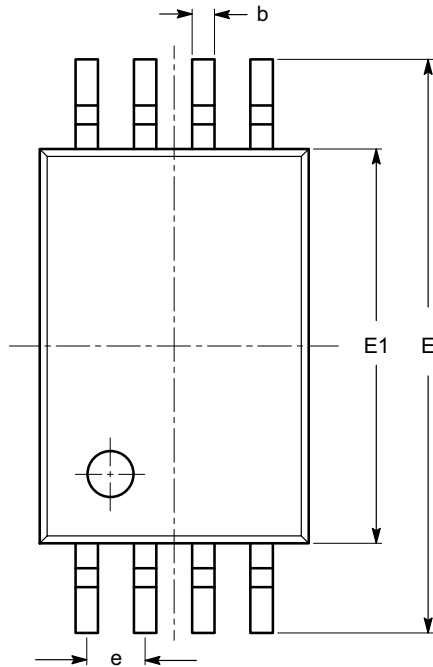


| SYMBOL | MIN      | NOM  | MAX  |
|--------|----------|------|------|
| A      |          |      | 1.20 |
| A1     | 0.05     |      | 0.15 |
| A2     | 0.80     | 0.90 | 1.05 |
| b      | 0.19     |      | 0.30 |
| c      | 0.09     |      | 0.20 |
| D      | 2.90     | 3.00 | 3.10 |
| E      | 6.30     | 6.40 | 6.50 |
| E1     | 4.30     | 4.40 | 4.50 |
| e      | 0.65 BSC |      |      |
| L      | 1.00 REF |      |      |
| L1     | 0.50     | 0.60 | 0.75 |
| θ      | 0°       |      | 8°   |

**TOP VIEW**

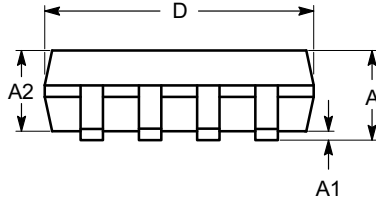

**SIDE VIEW**

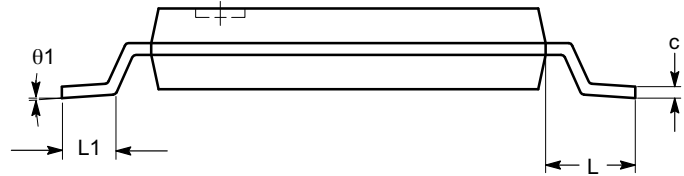

**END VIEW**


**Notes:**

- (1) All dimensions are in millimeters. Angles in degrees.
- (2) Complies with JEDEC MO-153.

# CAT93C76B

## PACKAGE DIMENSIONS



UDFN8, 2x3 EXTENDED PAD  
CASE 517AZ-01  
ISSUE O

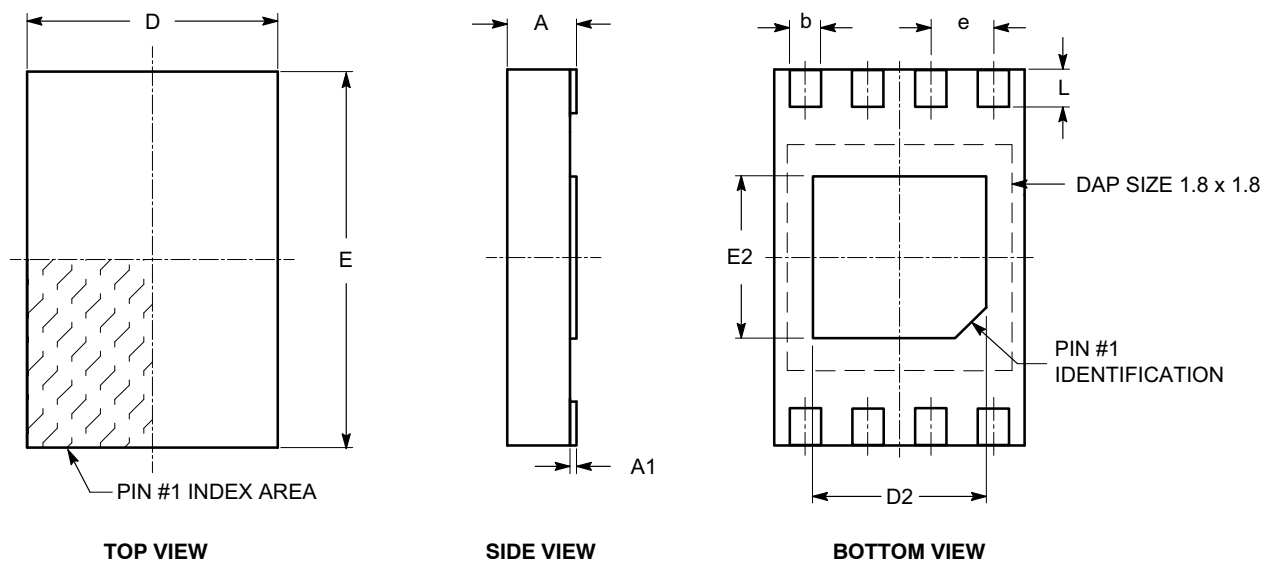

| SYMBOL | MIN       | NOM  | MAX  |
|--------|-----------|------|------|
| A      | 0.45      | 0.50 | 0.55 |
| A1     | 0.00      | 0.02 | 0.05 |
| A3     | 0.127 REF |      |      |
| b      | 0.20      | 0.25 | 0.30 |
| D      | 1.95      | 2.00 | 2.05 |
| D2     | 1.35      | 1.40 | 1.45 |
| E      | 2.95      | 3.00 | 3.05 |
| E2     | 1.25      | 1.30 | 1.35 |
| e      | 0.50 REF  |      |      |
| L      | 0.25      | 0.30 | 0.35 |

### Notes:


- (1) All dimensions are in millimeters.
- (2) Refer JEDEC MO-236/MO-252.

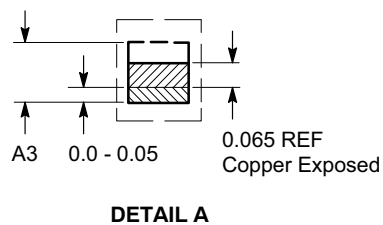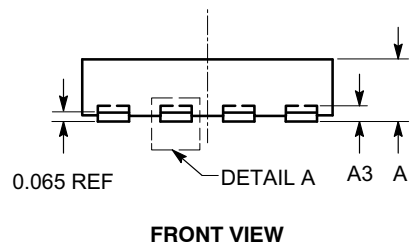




# CAT93C76B

## PACKAGE DIMENSIONS

**MSOP 8, 3x3**  
CASE 846AD-01  
ISSUE O

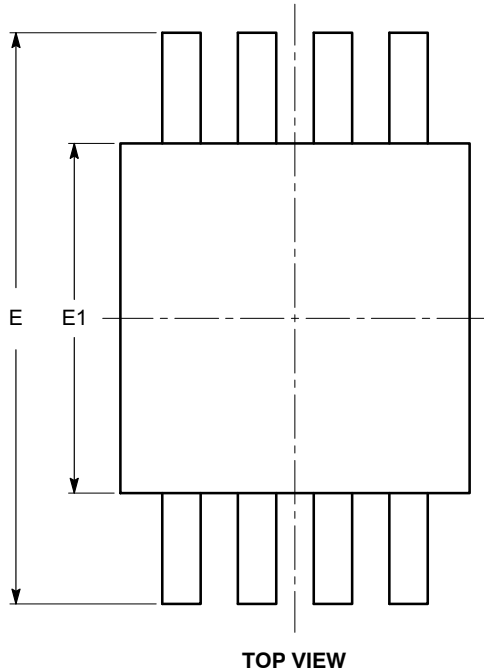

| SYMBOL   | MIN      | NOM  | MAX  |
|----------|----------|------|------|
| A        |          |      | 1.10 |
| A1       | 0.05     | 0.10 | 0.15 |
| A2       | 0.75     | 0.85 | 0.95 |
| b        | 0.22     |      | 0.38 |
| c        | 0.13     |      | 0.23 |
| D        | 2.90     | 3.00 | 3.10 |
| E        | 4.80     | 4.90 | 5.00 |
| E1       | 2.90     | 3.00 | 3.10 |
| e        | 0.65 BSC |      |      |
| L        | 0.40     | 0.60 | 0.80 |
| L1       | 0.95 REF |      |      |
| L2       | 0.25 BSC |      |      |
| $\theta$ | 0°       |      | 6°   |

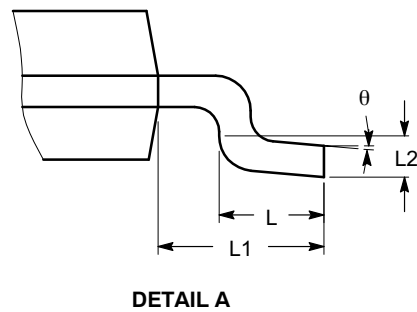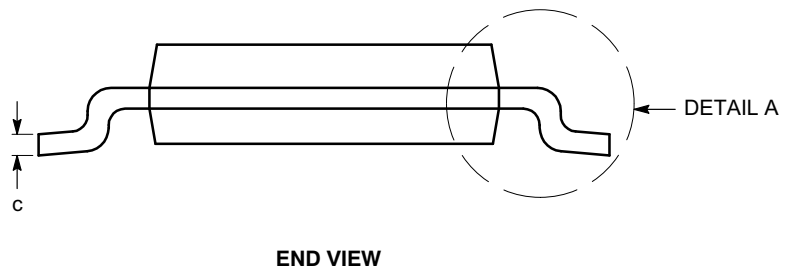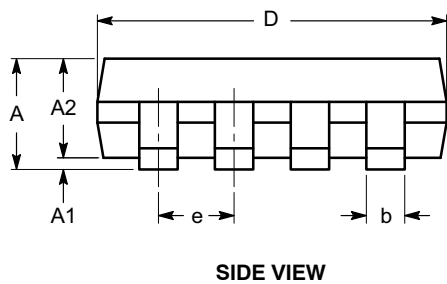

### Notes:

- (1) All dimensions are in millimeters. Angles in degrees.
- (2) Complies with JEDEC MO-187.

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative