

T1/CEPT/ISDN PRI Interface Transformer

Electrical Specifications @ 25°C

Turns Ratio ($\pm 3\%$)	1CT:1.15CT (T1) & 1CT:1.15CT (T2)
---------------------------	-----------------------------------

PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.5		mH
Leakage Inductance		0.8	μ H
Capacitance ($C_{w/w}$)		45	pF
Primary DC Resistance		1.0	Ohms
Secondary DC Resistance		1.0	Ohms
Operating Temp Range	-40	+85	°C

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.


Parts shipped in anti-static tubes. 33 pieces per tube

Tape & Reel Available


Primary Pins 1-3 & 11-9

Isolation 2000 V_{RMS} Min.

PHYSICAL DIMENSIONS inches (mm)

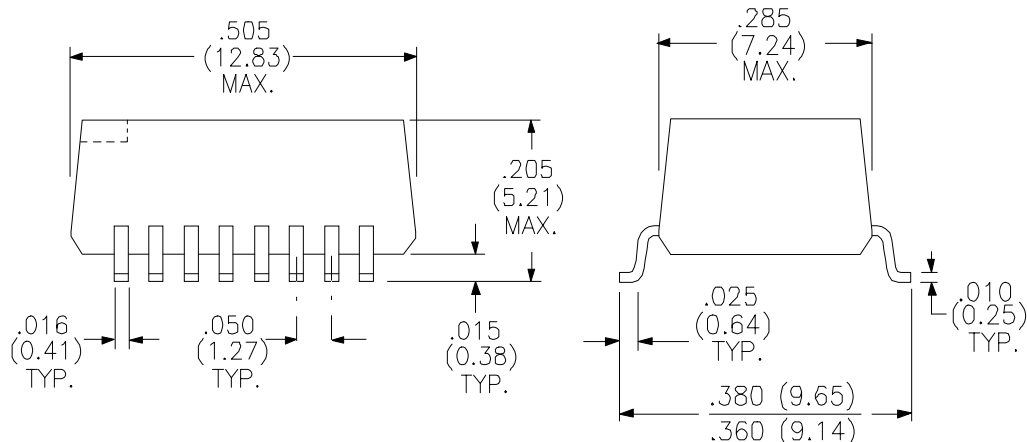

Schematic Diagram

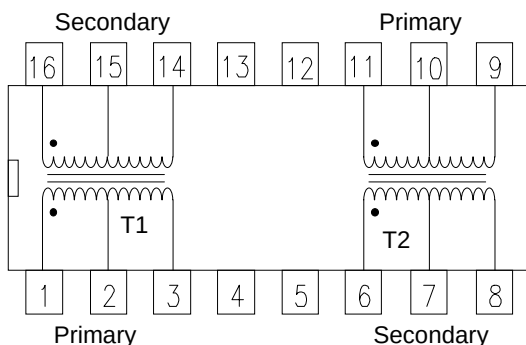

Rhombus P/N: **T-14177**

Cust. P/N:

Name:

Date: **7/2/99**

Sheet: 1 of 1