


SHEET 1 OF 1

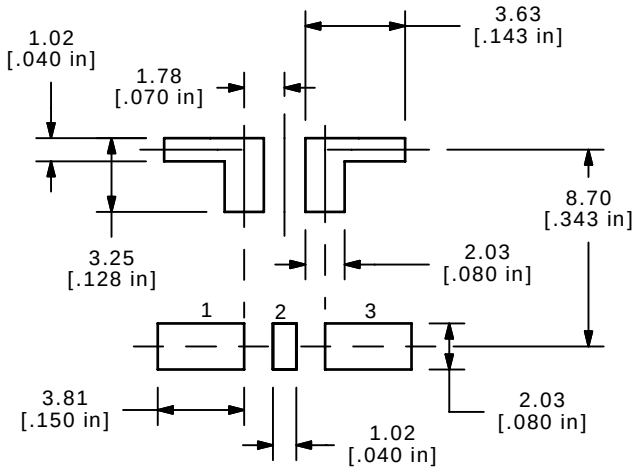

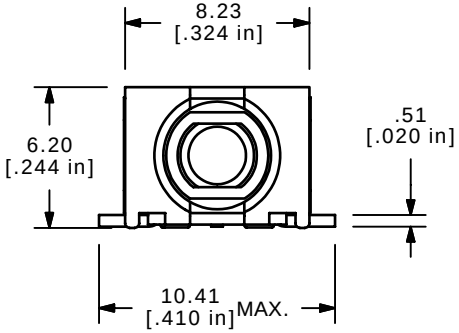


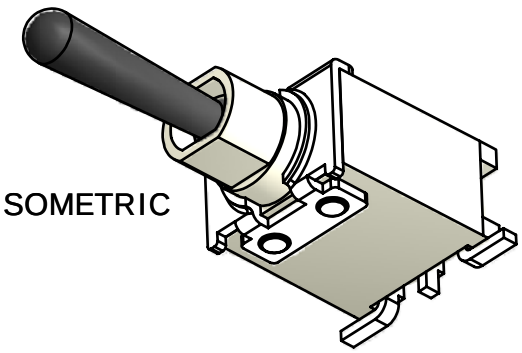


▲

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
(ON)	OFF	(ON)
2-3	OPEN	2-1

(ON) = MOMENTARY

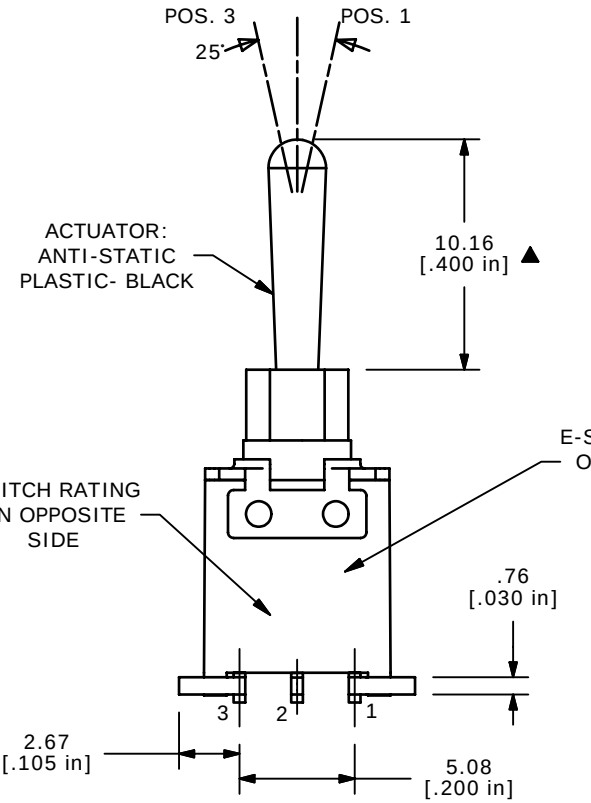

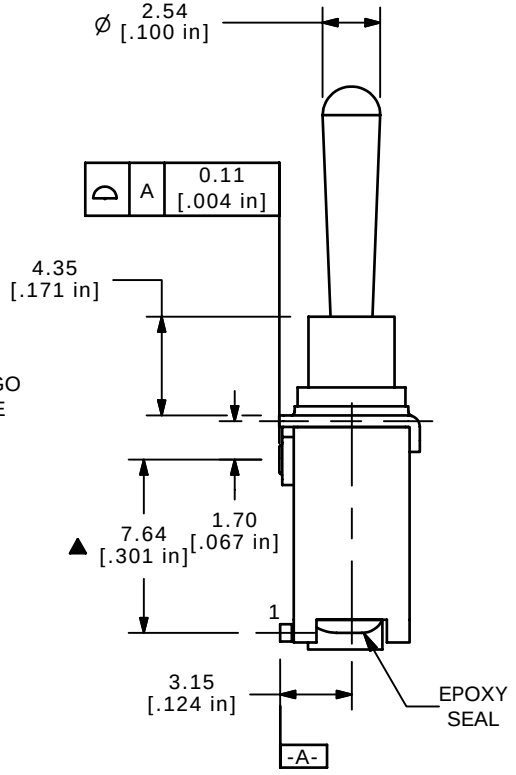

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. TERMINAL NUMBERS FOR REF. ONLY
3. GENERAL TOLERANCE: X.X=± 0.4
   X.XX=± 0.25
4. PLATING MATERIAL: GOLD
5. RATING: 0.4VA MAX. @ 20V (AC or DC)
6. CONTACT RESISTANCE: 20 MILLI-OHMS MAX.
7. MECHANICAL LIFE: 30,0000 MAKE AND BREAK CYCLES AT FULL LOAD
8. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
9. DIELECTRIC STRENGTH: 1,000 V RMS@SEA LEVEL
10. OPERATING TEMPERATURE: -30˚C TO 85˚C
11. PACKAGING: 500 PER REEL.
12. ▲DENOTES CRITICAL PARAMETER.
13. 2002/95/EC (ROHS) COMPLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
B	n/a	TITLE CHANGE (WAS 200BWMSP3TAA1SM6RE)	4/16/09	BLR
A	18490	RELEASE FOR PRODUCTION	4/16/09	BLR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH | LAMB INDUSTRIES

TITLE 200BWMSP4TAA1SM6RE (B)

SCALE	DATE	DR	DWG	REV
3:1	4/16/2009	BLR	T833045	B