
GF063-K Series with Knob

TOCOS® POTENTIOMETERS

1/4" Square, Single-Turn, Through-Hole Sealed Cermet Trimmers

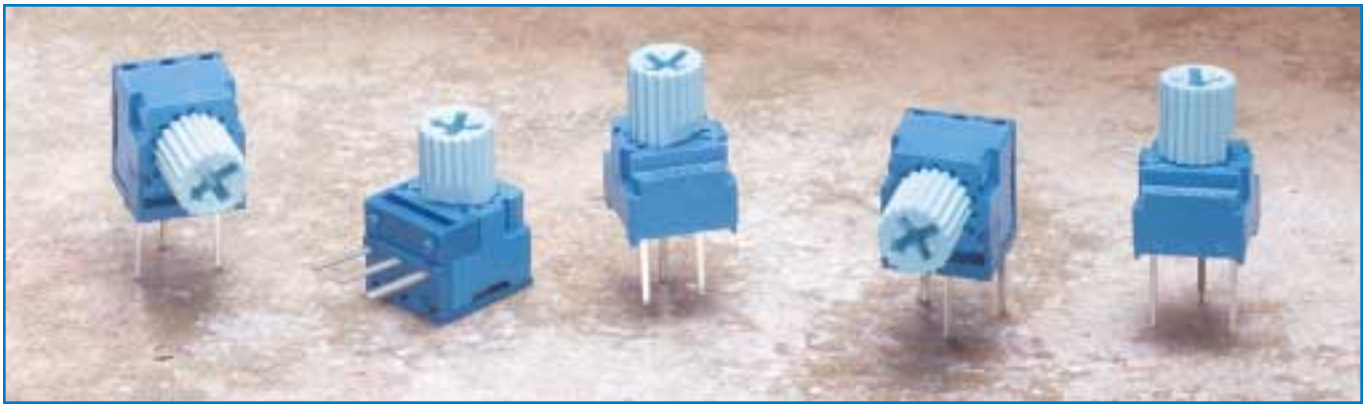

Features

- 1/4" square, single-turn, through-hole, sealed cermet trimmers
- Top and side adjust styles available
- Knob on all models for convenient fingertip adjustment
- Same design and housing sizes as GF063 series
- Precious metal, multi-contact wiper design
- Meets UL 94V-0 flammability requirements
- Sealed to withstand immersion cleaning processes
- Tape and ammo box available for PK, P1K and UK models

Specifications

Electrical

Standard Resistance Range . . . . . 10Ω to 5MΩ (standard 1, 2 & 5 sequence)

Resistance Tolerance . . . . . ±10% and ±20%

End Resistance . . . . . 1% or 1Ω, whichever is greater

Resistance Taper . . . . . Linear

Peak Noise (C.R.V.) . . . . . 1% or 1Ω, whichever is greater

Power Rating . . . . . 0.5 watt at +70°C, 0 watt at +125°C

Maximum Input Voltage . . . . . 250VDC or power rating, whichever is smaller

Temperature Coefficient . . . . . ±100ppm/°C

Insulation Resistance . . . . . 1,000MΩ minimum at 500VDC

Dielectric Strength . . . . . 900VAC, 1 minute

Adjustment Travel . . . . . 210°±10°

Mechanical

Mechanical Travel . . . . . 250°±10°

Shaft Torque . . . . . 200 gf•cm (2.77 oz•in) max.

Stop Strength . . . . . 500 gf•cm (6.93 oz•in) min.

Flammability of Plastic Materials . . . . . Meets UL 94V-0

Nominal Weight . . . . . 0.54g (PK, P1K, WK, UK) 0.64g (SK, S1K, XK, X1K, VK, V1K)

Marking . . . . . Resistance code, date code, model type

All GF063-K models are available without knobs. Refer to GF063 Series on page 56.

Environmental

Temperature Range . . . . . −55°C to +125°C

Low Temperature Operation . . . . −55°C, 0.5 watt, 2 hours
ΔT/R ≦±2%, S.S. ≦±2%

High Temperature Exposure . . . . . +125°C, 250 hours
ΔT/R ≦±2%, S.S. ≦±2%

Load Life . . . . . +70°C, 0.5 watt, 1,000 hours
ΔT/R ≦±3%, S.S. ≦±2%

Thermal Shock . . . . . −55°C, +125°C, 30 minutes each, 5 cycles
ΔT/R ≦±1%, S.S. ≦±1%

Shock . . . . . 100G, 6ms, 6 directions, 3 times each
ΔT/R ≦±1%, S.S. ≦±1%

Vibration . . . . . 10-2,000Hz, 1.5mm amplitude, 20G, 12 hours
ΔT/R ≦±1%, S.S. ≦±1%

Humidity . . . . . +40°C, 90-95%RH, 0.5 watt, 500 hours
ΔT/R ≦±3%, S.S. ≦±2%

Moisture Resistance . . . . . −10°C to +65°C, 80-98%RH, 0.5 watt, 10 cycles, 240 hours
ΔT/R ≦±2%

Soldering Heat Resistance . . . . . 350°C, 3 seconds
ΔT/R ≦±1%

Seal Test . . . . . +85°C, hot water for 1 minute


Rotational Life . . . . . 100 cycles without discontinuity
ΔT/R ≦±(2Ω+3%)

ΔT/R = Total Resistance Change; S.S. = Setting Stability (voltage ratio)


TOCOS AMERICA, INC.
1177 East Tower Road, Schaumburg, IL 60173 Tel: 847-884-6664 Fax: 847-884-6665 E-mail: sales@tocos.com www.tocos.com

Unit: mm


GF063PK
P Terminal Style, Top Adjust Knob

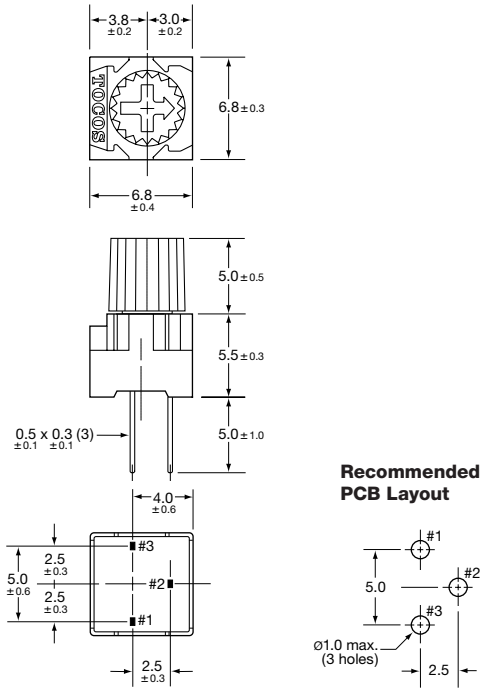


GF063P1K
P1 Terminal Style, Top Adjust Knob

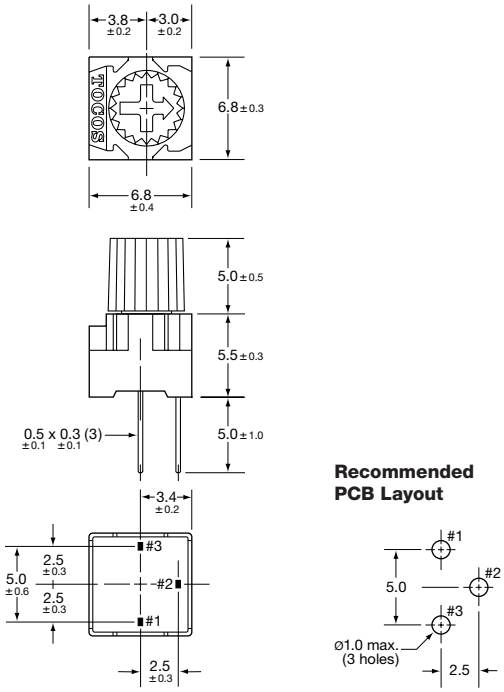

GF063WK
W Terminal Style, Top Adjust Knob

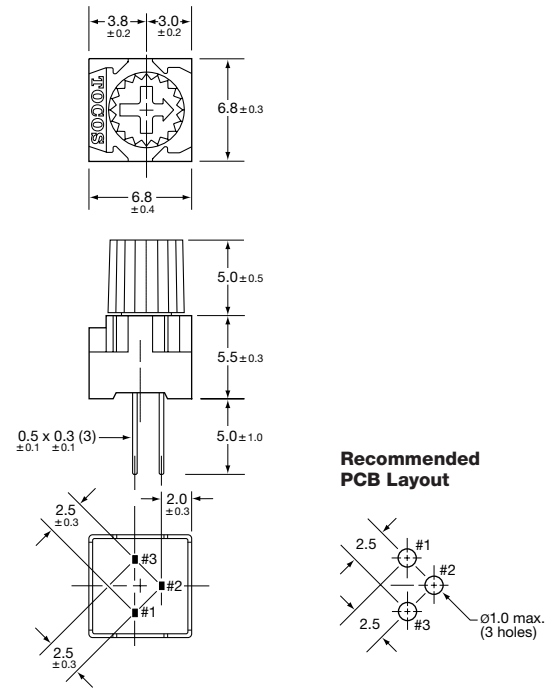


GF063UK
U Terminal Style, Top Adjust Knob

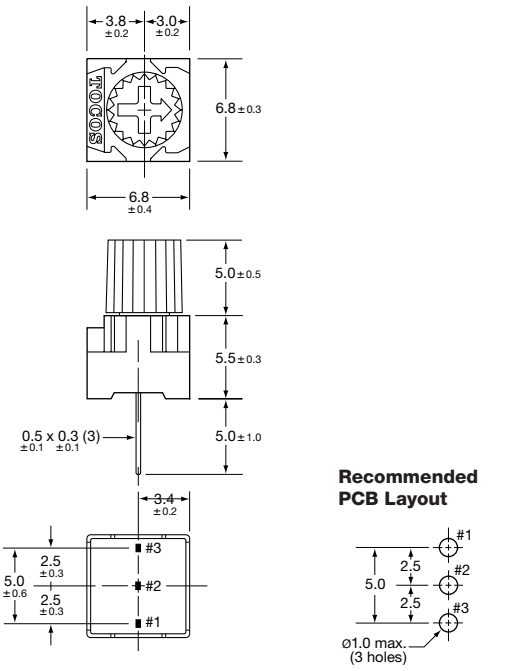


Unit: mm

GF063SK
S Terminal Style, Side Adjust Knob

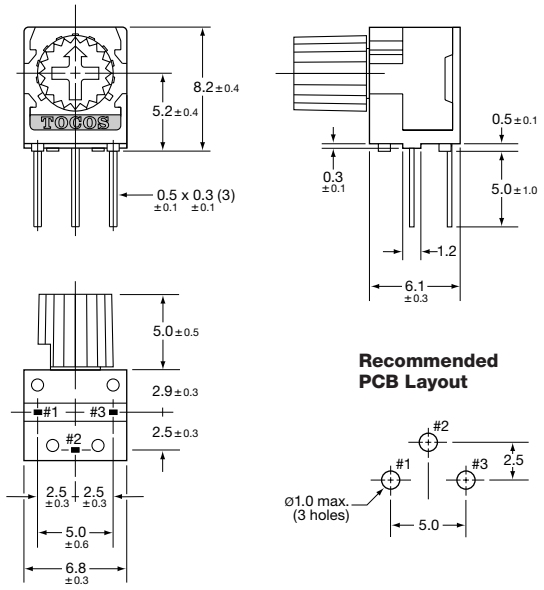


Recommended PCB Layout

GF063S1K
S1 Terminal Style, Side Adjust Knob

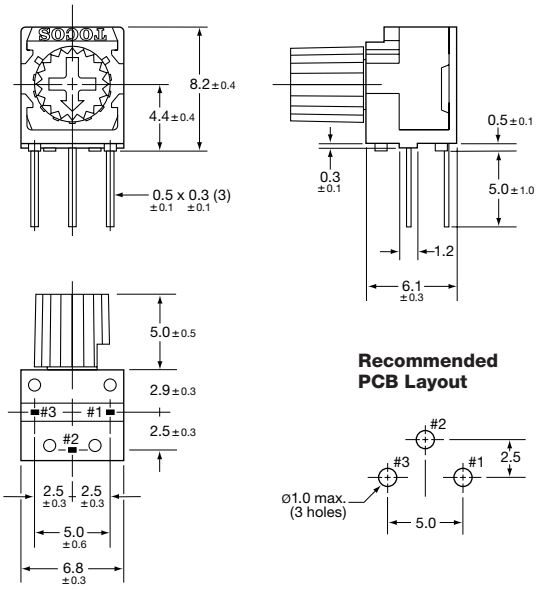


Recommended PCB Layout

GF063XK
X Terminal Style, Side Adjust Knob

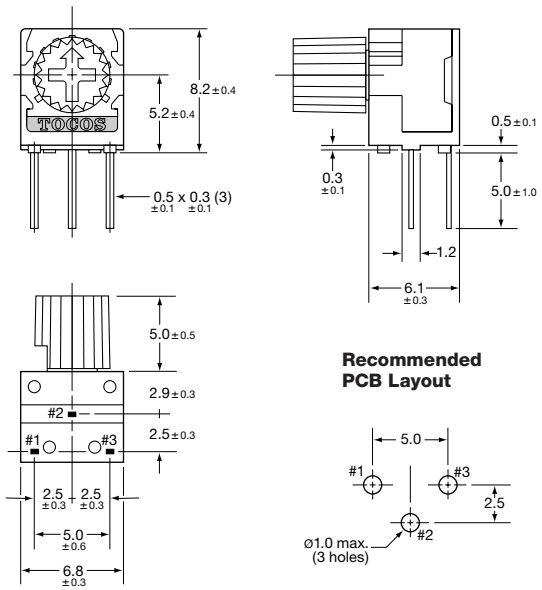

Recommended PCB Layout

GF063X1K
X1 Terminal Style, Side Adjust Knob

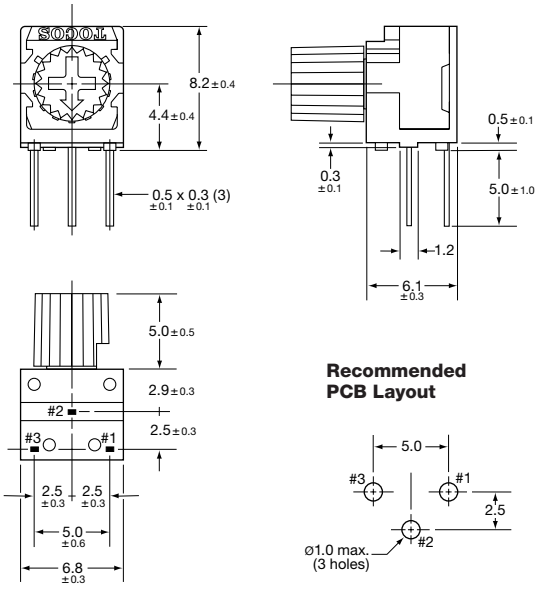


Recommended PCB Layout

TOCOS AMERICA, INC.
1177 East Tower Road, Schaumburg, IL 60173 Tel: 847-884-6664 Fax: 847-884-6665 E-mail: sales@tocos.com www.tocos.com


Dimensions

Unit: mm

GF063VK
V Terminal Style, Side Adjust Knob

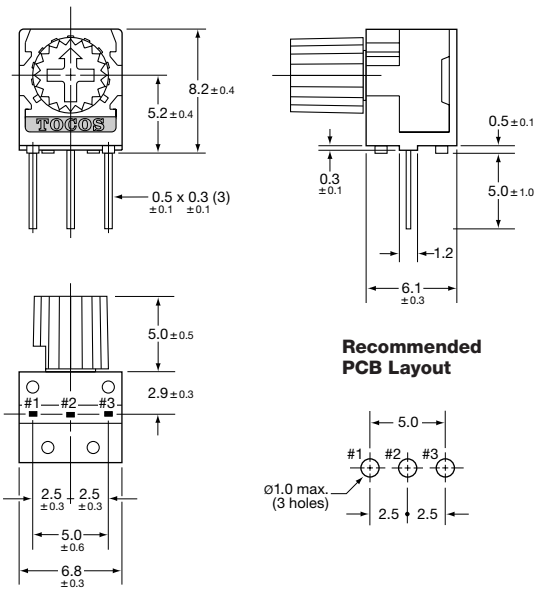


GF063V1K
V1 Terminal Style, Side Adjust Knob

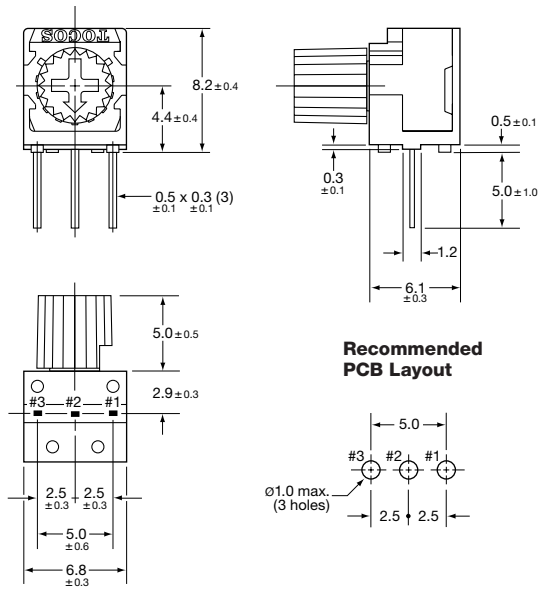


Knob Dimensions

All GF063-K Models

Unit: mm

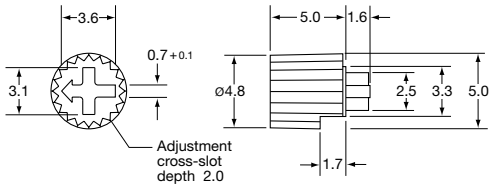

Electrical Schematic

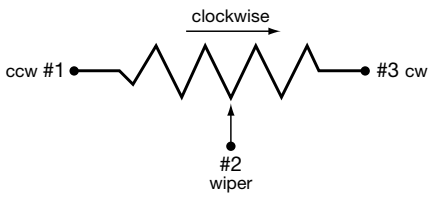


Tape Dimensions


Conforms to EIA-468 Specifications

Unit: mm

PKT2, P1KT2

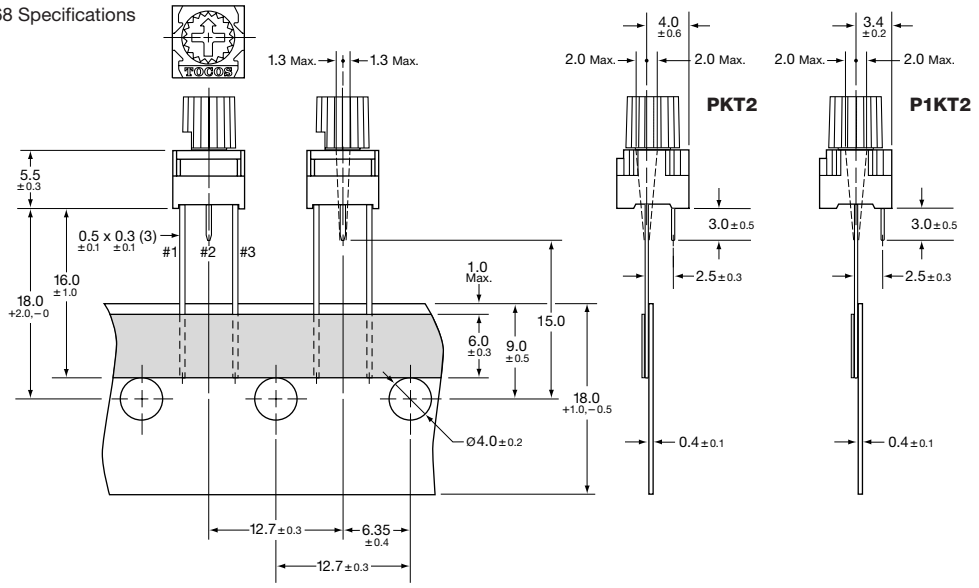

UKT2

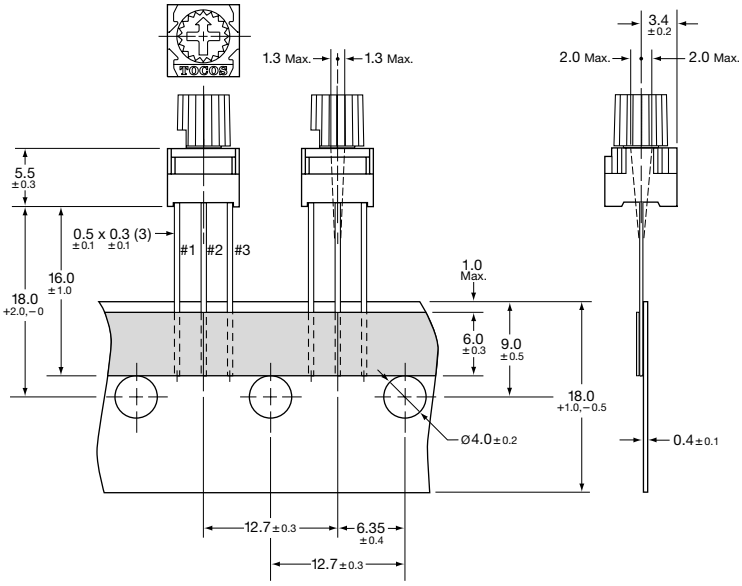


Ammo Box Dimensions

Conforms to EIA-468-B and JIS-C-0805

PKT2, P1KT2, UKT2

1,000 Pieces Per Box

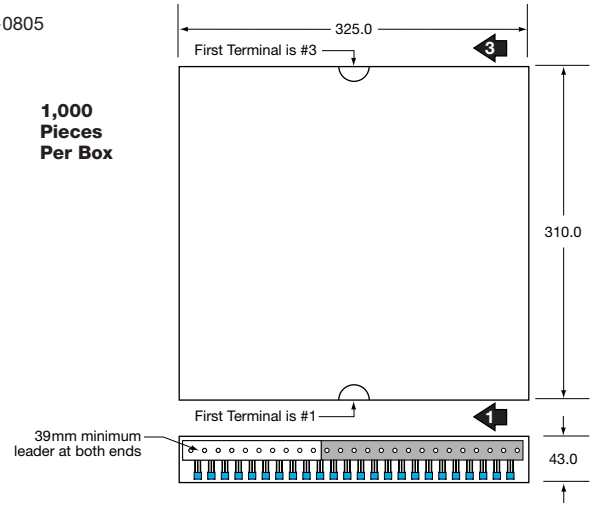

TOCOS AMERICA, INC.
1177 East Tower Road, Schaumburg, IL 60173 Tel: 847-884-6664 Fax: 847-884-6665 E-mail: sales@tocos.com www.tocos.com

GF063-K Series Part Numbering System

GF063 P1 K T2 B 102 K

- K — Resistance Tolerance: K = ±10%; M = ±20%
- 102 — Resistance Code: Expressed in ohms. A three digit code where the first two digits are significant figures, and the third digit indicates the number of zeros that follow these figures (i.e., 100 = 10Ω; 101 = 100Ω; 102 = 1,000Ω; 105 = 1,000,000Ω).
- B — Resistance Taper: B = Linear.
- T2 — Packaging: T2 = Tape and Ammo Box, PK, P1K and UK Top Adjust Models.
- K — Adjustment Knob: K = Knob.
- P1 — Terminal Style: P, P1, W, U = 3-Lead Configurations, Top Adjust. S, S1, X, X1, V, V1 = 3-Lead Configurations, Side Adjust.
- GF063 — TOCOS Series Name.

Part Numbers

Nominal Resistance		Resistance Tolerance ±10%		Resistance Tolerance ±20%		Potentiometer Styles
Value (Ω)	Code	Catalog No. Tape & Ammo Box	Catalog No. Bulk	Catalog No. Tape & Ammo Box	Catalog No. Bulk	
GF063PK Through-Hole, P Terminal Style, Top Adjust Knob						
10	100	GF063PKT2 B 100 K	GF063PK B 100 K	GF063PKT2 B 100 M	GF063PK B 100 M	 GF063PK
20	200	GF063PKT2 B 200 K	GF063PK B 200 K	GF063PKT2 B 200 M	GF063PK B 200 M	
50	500	GF063PKT2 B 500 K	GF063PK B 500 K	GF063PKT2 B 500 M	GF063PK B 500 M	
100	101	GF063PKT2 B 101 K	GF063PK B 101 K	GF063PKT2 B 101 M	GF063PK B 101 M	
200	201	GF063PKT2 B 201 K	GF063PK B 201 K	GF063PKT2 B 201 M	GF063PK B 201 M	
500	501	GF063PKT2 B 501 K	GF063PK B 501 K	GF063PKT2 B 501 M	GF063PK B 501 M	
1,000	102	GF063PKT2 B 102 K	GF063PK B 102 K	GF063PKT2 B 102 M	GF063PK B 102 M	
2,000	202	GF063PKT2 B 202 K	GF063PK B 202 K	GF063PKT2 B 202 M	GF063PK B 202 M	
5,000	502	GF063PKT2 B 502 K	GF063PK B 502 K	GF063PKT2 B 502 M	GF063PK B 502 M	
10,000	103	GF063PKT2 B 103 K	GF063PK B 103 K	GF063PKT2 B 103 M	GF063PK B 103 M	
20,000	203	GF063PKT2 B 203 K	GF063PK B 203 K	GF063PKT2 B 203 M	GF063PK B 203 M	
50,000	503	GF063PKT2 B 503 K	GF063PK B 503 K	GF063PKT2 B 503 M	GF063PK B 503 M	
100,000	104	GF063PKT2 B 104 K	GF063PK B 104 K	GF063PKT2 B 104 M	GF063PK B 104 M	
200,000	204	GF063PKT2 B 204 K	GF063PK B 204 K	GF063PKT2 B 204 M	GF063PK B 204 M	
500,000	504	GF063PKT2 B 504 K	GF063PK B 504 K	GF063PKT2 B 504 M	GF063PK B 504 M	
1,000,000	105	GF063PKT2 B 105 K	GF063PK B 105 K	GF063PKT2 B 105 M	GF063PK B 105 M	
2,000,000	205	GF063PKT2 B 205 K	GF063PK B 205 K	GF063PKT2 B 205 M	GF063PK B 205 M	
5,000,000	505	GF063PKT2 B 505 K	GF063PK B 505 K	GF063PKT2 B 505 M	GF063PK B 505 M	
GF063P1K Through-Hole, P1 Terminal Style, Top Adjust Knob						
10	100	GF063P1KT2 B 100 K	GF063P1K B 100 K	GF063P1KT2 B 100 M	GF063P1K B 100 M	 GF063P1K
20	200	GF063P1KT2 B 200 K	GF063P1K B 200 K	GF063P1KT2 B 200 M	GF063P1K B 200 M	
50	500	GF063P1KT2 B 500 K	GF063P1K B 500 K	GF063P1KT2 B 500 M	GF063P1K B 500 M	
100	101	GF063P1KT2 B 101 K	GF063P1K B 101 K	GF063P1KT2 B 101 M	GF063P1K B 101 M	
200	201	GF063P1KT2 B 201 K	GF063P1K B 201 K	GF063P1KT2 B 201 M	GF063P1K B 201 M	
500	501	GF063P1KT2 B 501 K	GF063P1K B 501 K	GF063P1KT2 B 501 M	GF063P1K B 501 M	
1,000	102	GF063P1KT2 B 102 K	GF063P1K B 102 K	GF063P1KT2 B 102 M	GF063P1K B 102 M	
2,000	202	GF063P1KT2 B 202 K	GF063P1K B 202 K	GF063P1KT2 B 202 M	GF063P1K B 202 M	
5,000	502	GF063P1KT2 B 502 K	GF063P1K B 502 K	GF063P1KT2 B 502 M	GF063P1K B 502 M	
10,000	103	GF063P1KT2 B 103 K	GF063P1K B 103 K	GF063P1KT2 B 103 M	GF063P1K B 103 M	
20,000	203	GF063P1KT2 B 203 K	GF063P1K B 203 K	GF063P1KT2 B 203 M	GF063P1K B 203 M	
50,000	503	GF063P1KT2 B 503 K	GF063P1K B 503 K	GF063P1KT2 B 503 M	GF063P1K B 503 M	
100,000	104	GF063P1KT2 B 104 K	GF063P1K B 104 K	GF063P1KT2 B 104 M	GF063P1K B 104 M	
200,000	204	GF063P1KT2 B 204 K	GF063P1K B 204 K	GF063P1KT2 B 204 M	GF063P1K B 204 M	
500,000	504	GF063P1KT2 B 504 K	GF063P1K B 504 K	GF063P1KT2 B 504 M	GF063P1K B 504 M	
1,000,000	105	GF063P1KT2 B 105 K	GF063P1K B 105 K	GF063P1KT2 B 105 M	GF063P1K B 105 M	
2,000,000	205	GF063P1KT2 B 205 K	GF063P1K B 205 K	GF063P1KT2 B 205 M	GF063P1K B 205 M	
5,000,000	505	GF063P1KT2 B 505 K	GF063P1K B 505 K	GF063P1KT2 B 505 M	GF063P1K B 505 M	

GF063-K Series Part Numbers

Nominal Resistance		Resistance Tolerance ±10%		Resistance Tolerance ±20%		Potentiometer Styles
Value (Ω)	Code	Catalog No. Tape & Ammo Box	Catalog No. Bulk	Catalog No. Tape & Ammo Box	Catalog No. Bulk	

GF063WK Through-Hole, W Terminal Style, Top Adjust Knob

10	100	—	GF063WK B 100 K	—	GF063WK B 100 M	 GF063WK
20	200	—	GF063WK B 200 K	—	GF063WK B 200 M	
50	500	—	GF063WK B 500 K	—	GF063WK B 500 M	
100	101	—	GF063WK B 101 K	—	GF063WK B 101 M	
200	201	—	GF063WK B 201 K	—	GF063WK B 201 M	
500	501	—	GF063WK B 501 K	—	GF063WK B 501 M	
1,000	102	—	GF063WK B 102 K	—	GF063WK B 102 M	
2,000	202	—	GF063WK B 202 K	—	GF063WK B 202 M	
5,000	502	—	GF063WK B 502 K	—	GF063WK B 502 M	
10,000	103	—	GF063WK B 103 K	—	GF063WK B 103 M	
20,000	203	—	GF063WK B 203 K	—	GF063WK B 203 M	
50,000	503	—	GF063WK B 503 K	—	GF063WK B 503 M	
100,000	104	—	GF063WK B 104 K	—	GF063WK B 104 M	
200,000	204	—	GF063WK B 204 K	—	GF063WK B 204 M	
500,000	504	—	GF063WK B 504 K	—	GF063WK B 504 M	
1,000,000	105	—	GF063WK B 105 K	—	GF063WK B 105 M	
2,000,000	205	—	GF063WK B 205 K	—	GF063WK B 205 M	
5,000,000	505	—	GF063WK B 505 K	—	GF063WK B 505 M	

GF063UK Through-Hole, U Terminal Style, Top Adjust Knob

10	100	GF063UKT2 B 100 K	GF063UK B 100 K	GF063UKT2 B 100 M	GF063UK B 100 M	 GF063UK
20	200	GF063UKT2 B 200 K	GF063UK B 200 K	GF063UKT2 B 200 M	GF063UK B 200 M	
50	500	GF063UKT2 B 500 K	GF063UK B 500 K	GF063UKT2 B 500 M	GF063UK B 500 M	
100	101	GF063UKT2 B 101 K	GF063UK B 101 K	GF063UKT2 B 101 M	GF063UK B 101 M	
200	201	GF063UKT2 B 201 K	GF063UK B 201 K	GF063UKT2 B 201 M	GF063UK B 201 M	
500	501	GF063UKT2 B 501 K	GF063UK B 501 K	GF063UKT2 B 501 M	GF063UK B 501 M	
1,000	102	GF063UKT2 B 102 K	GF063UK B 102 K	GF063UKT2 B 102 M	GF063UK B 102 M	
2,000	202	GF063UKT2 B 202 K	GF063UK B 202 K	GF063UKT2 B 202 M	GF063UK B 202 M	
5,000	502	GF063UKT2 B 502 K	GF063UK B 502 K	GF063UKT2 B 502 M	GF063UK B 502 M	
10,000	103	GF063UKT2 B 103 K	GF063UK B 103 K	GF063UKT2 B 103 M	GF063UK B 103 M	
20,000	203	GF063UKT2 B 203 K	GF063UK B 203 K	GF063UKT2 B 203 M	GF063UK B 203 M	
50,000	503	GF063UKT2 B 503 K	GF063UK B 503 K	GF063UKT2 B 503 M	GF063UK B 503 M	
100,000	104	GF063UKT2 B 104 K	GF063UK B 104 K	GF063UKT2 B 104 M	GF063UK B 104 M	
200,000	204	GF063UKT2 B 204 K	GF063UK B 204 K	GF063UKT2 B 204 M	GF063UK B 204 M	
500,000	504	GF063UKT2 B 504 K	GF063UK B 504 K	GF063UKT2 B 504 M	GF063UK B 504 M	
1,000,000	105	GF063UKT2 B 105 K	GF063UK B 105 K	GF063UKT2 B 105 M	GF063UK B 105 M	
2,000,000	205	GF063UKT2 B 205 K	GF063UK B 205 K	GF063UKT2 B 205 M	GF063UK B 205 M	
5,000,000	505	GF063UKT2 B 505 K	GF063UK B 505 K	GF063UKT2 B 505 M	GF063UK B 505 M	

GF063SK Through-Hole, S Terminal Style, Side Adjust Knob

10	100	—	GF063SK B 100 K	—	GF063SK B 100 M	 GF063SK
20	200	—	GF063SK B 200 K	—	GF063SK B 200 M	
50	500	—	GF063SK B 500 K	—	GF063SK B 500 M	
100	101	—	GF063SK B 101 K	—	GF063SK B 101 M	
200	201	—	GF063SK B 201 K	—	GF063SK B 201 M	
500	501	—	GF063SK B 501 K	—	GF063SK B 501 M	
1,000	102	—	GF063SK B 102 K	—	GF063SK B 102 M	
2,000	202	—	GF063SK B 202 K	—	GF063SK B 202 M	
5,000	502	—	GF063SK B 502 K	—	GF063SK B 502 M	
10,000	103	—	GF063SK B 103 K	—	GF063SK B 103 M	
20,000	203	—	GF063SK B 203 K	—	GF063SK B 203 M	
50,000	503	—	GF063SK B 503 K	—	GF063SK B 503 M	
100,000	104	—	GF063SK B 104 K	—	GF063SK B 104 M	
200,000	204	—	GF063SK B 204 K	—	GF063SK B 204 M	
500,000	504	—	GF063SK B 504 K	—	GF063SK B 504 M	
1,000,000	105	—	GF063SK B 105 K	—	GF063SK B 105 M	
2,000,000	205	—	GF063SK B 205 K	—	GF063SK B 205 M	
5,000,000	505	—	GF063SK B 505 K	—	GF063SK B 505 M	

TOCOS AMERICA, INC.
1177 East Tower Road, Schaumburg, IL 60173 Tel: 847-884-6664 Fax: 847-884-6665 E-mail: sales@tocos.com www.tocos.com

GF063-K Series Part Numbers

Nominal Resistance		Resistance Tolerance ±10%		Resistance Tolerance ±20%		Potentiometer Styles
Value (Ω)	Code	Catalog No. Tape & Ammo Box	Catalog No. Bulk	Catalog No. Tape & Ammo Box	Catalog No. Bulk	

GF063S1K Through-Hole, S1 Terminal Style, Side Adjust Knob

10	100	—	GF063S1K B 100 K	—	GF063S1K B 100 M	 GF063S1K
20	200	—	GF063S1K B 200 K	—	GF063S1K B 200 M	
50	500	—	GF063S1K B 500 K	—	GF063S1K B 500 M	
100	101	—	GF063S1K B 101 K	—	GF063S1K B 101 M	
200	201	—	GF063S1K B 201 K	—	GF063S1K B 201 M	
500	501	—	GF063S1K B 501 K	—	GF063S1K B 501 M	
1,000	102	—	GF063S1K B 102 K	—	GF063S1K B 102 M	
2,000	202	—	GF063S1K B 202 K	—	GF063S1K B 202 M	
5,000	502	—	GF063S1K B 502 K	—	GF063S1K B 502 M	
10,000	103	—	GF063S1K B 103 K	—	GF063S1K B 103 M	
20,000	203	—	GF063S1K B 203 K	—	GF063S1K B 203 M	
50,000	503	—	GF063S1K B 503 K	—	GF063S1K B 503 M	
100,000	104	—	GF063S1K B 104 K	—	GF063S1K B 104 M	
200,000	204	—	GF063S1K B 204 K	—	GF063S1K B 204 M	
500,000	504	—	GF063S1K B 504 K	—	GF063S1K B 504 M	
1,000,000	105	—	GF063S1K B 105 K	—	GF063S1K B 105 M	
2,000,000	205	—	GF063S1K B 205 K	—	GF063S1K B 205 M	
5,000,000	505	—	GF063S1K B 505 K	—	GF063S1K B 505 M	

GF063XK Through-Hole, X Terminal Style, Side Adjust Knob

10	100	—	GF063XK B 100 K	—	GF063XK B 100 M	 GF063XK
20	200	—	GF063XK B 200 K	—	GF063XK B 200 M	
50	500	—	GF063XK B 500 K	—	GF063XK B 500 M	
100	101	—	GF063XK B 101 K	—	GF063XK B 101 M	
200	201	—	GF063XK B 201 K	—	GF063XK B 201 M	
500	501	—	GF063XK B 501 K	—	GF063XK B 501 M	
1,000	102	—	GF063XK B 102 K	—	GF063XK B 102 M	
2,000	202	—	GF063XK B 202 K	—	GF063XK B 202 M	
5,000	502	—	GF063XK B 502 K	—	GF063XK B 502 M	
10,000	103	—	GF063XK B 103 K	—	GF063XK B 103 M	
20,000	203	—	GF063XK B 203 K	—	GF063XK B 203 M	
50,000	503	—	GF063XK B 503 K	—	GF063XK B 503 M	
100,000	104	—	GF063XK B 104 K	—	GF063XK B 104 M	
200,000	204	—	GF063XK B 204 K	—	GF063XK B 204 M	
500,000	504	—	GF063XK B 504 K	—	GF063XK B 504 M	
1,000,000	105	—	GF063XK B 105 K	—	GF063XK B 105 M	
2,000,000	205	—	GF063XK B 205 K	—	GF063XK B 205 M	
5,000,000	505	—	GF063XK B 505 K	—	GF063XK B 505 M	

GF063X1K Through-Hole, X1 Terminal Style, Side Adjust Knob

10	100	—	GF063X1K B 100 K	—	GF063X1K B 100 M	 GF063X1K
20	200	—	GF063X1K B 200 K	—	GF063X1K B 200 M	
50	500	—	GF063X1K B 500 K	—	GF063X1K B 500 M	
100	101	—	GF063X1K B 101 K	—	GF063X1K B 101 M	
200	201	—	GF063X1K B 201 K	—	GF063X1K B 201 M	
500	501	—	GF063X1K B 501 K	—	GF063X1K B 501 M	
1,000	102	—	GF063X1K B 102 K	—	GF063X1K B 102 M	
2,000	202	—	GF063X1K B 202 K	—	GF063X1K B 202 M	
5,000	502	—	GF063X1K B 502 K	—	GF063X1K B 502 M	
10,000	103	—	GF063X1K B 103 K	—	GF063X1K B 103 M	
20,000	203	—	GF063X1K B 203 K	—	GF063X1K B 203 M	
50,000	503	—	GF063X1K B 503 K	—	GF063X1K B 503 M	
100,000	104	—	GF063X1K B 104 K	—	GF063X1K B 104 M	
200,000	204	—	GF063X1K B 204 K	—	GF063X1K B 204 M	
500,000	504	—	GF063X1K B 504 K	—	GF063X1K B 504 M	
1,000,000	105	—	GF063X1K B 105 K	—	GF063X1K B 105 M	
2,000,000	205	—	GF063X1K B 205 K	—	GF063X1K B 205 M	
5,000,000	505	—	GF063X1K B 505 K	—	GF063X1K B 505 M	

GF063-K Series Part Numbers

Nominal Resistance		Resistance Tolerance ±10%		Resistance Tolerance ±20%		Potentiometer Styles
Value (Ω)	Code	Catalog No. Tape & Ammo Box	Catalog No. Bulk	Catalog No. Tape & Ammo Box	Catalog No. Bulk	

GF063VK Through-Hole, V Terminal Style, Side Adjust Knob

10	100	—	GF063VK B 100 K	—	GF063VK B 100 M	 GF063VK
20	200	—	GF063VK B 200 K	—	GF063VK B 200 M	
50	500	—	GF063VK B 500 K	—	GF063VK B 500 M	
100	101	—	GF063VK B 101 K	—	GF063VK B 101 M	
200	201	—	GF063VK B 201 K	—	GF063VK B 201 M	
500	501	—	GF063VK B 501 K	—	GF063VK B 501 M	
1,000	102	—	GF063VK B 102 K	—	GF063VK B 102 M	
2,000	202	—	GF063VK B 202 K	—	GF063VK B 202 M	
5,000	502	—	GF063VK B 502 K	—	GF063VK B 502 M	
10,000	103	—	GF063VK B 103 K	—	GF063VK B 103 M	
20,000	203	—	GF063VK B 203 K	—	GF063VK B 203 M	
50,000	503	—	GF063VK B 503 K	—	GF063VK B 503 M	
100,000	104	—	GF063VK B 104 K	—	GF063VK B 104 M	
200,000	204	—	GF063VK B 204 K	—	GF063VK B 204 M	
500,000	504	—	GF063VK B 504 K	—	GF063VK B 504 M	
1,000,000	105	—	GF063VK B 105 K	—	GF063VK B 105 M	
2,000,000	205	—	GF063VK B 205 K	—	GF063VK B 205 M	
5,000,000	505	—	GF063VK B 505 K	—	GF063VK B 505 M	

GF063V1K Through-Hole, V1 Terminal Style, Side Adjust Knob

10	100	—	GF063V1K B 100 K	—	GF063V1K B 100 M	 GF063V1K
20	200	—	GF063V1K B 200 K	—	GF063V1K B 200 M	
50	500	—	GF063V1K B 500 K	—	GF063V1K B 500 M	
100	101	—	GF063V1K B 101 K	—	GF063V1K B 101 M	
200	201	—	GF063V1K B 201 K	—	GF063V1K B 201 M	
500	501	—	GF063V1K B 501 K	—	GF063V1K B 501 M	
1,000	102	—	GF063V1K B 102 K	—	GF063V1K B 102 M	
2,000	202	—	GF063V1K B 202 K	—	GF063V1K B 202 M	
5,000	502	—	GF063V1K B 502 K	—	GF063V1K B 502 M	
10,000	103	—	GF063V1K B 103 K	—	GF063V1K B 103 M	
20,000	203	—	GF063V1K B 203 K	—	GF063V1K B 203 M	
50,000	503	—	GF063V1K B 503 K	—	GF063V1K B 503 M	
100,000	104	—	GF063V1K B 104 K	—	GF063V1K B 104 M	
200,000	204	—	GF063V1K B 204 K	—	GF063V1K B 204 M	
500,000	504	—	GF063V1K B 504 K	—	GF063V1K B 504 M	
1,000,000	105	—	GF063V1K B 105 K	—	GF063V1K B 105 M	
2,000,000	205	—	GF063V1K B 205 K	—	GF063V1K B 205 M	
5,000,000	505	—	GF063V1K B 505 K	—	GF063V1K B 505 M	

Packaging

Standard:

Tape & Ammo Packaging

PKT2, P1KT2 & UT2
1,000 pieces per ammo box.

Bulk Packaging

All GF063-K Models
50 pieces per vinyl bag.
500 pieces per box.

Soldering and Cleaning Guidelines

For soldering, cleaning and other information, refer to Guidelines and Precautions for Using Potentiometers.

TOCOS AMERICA, INC.
1177 East Tower Road, Schaumburg, IL 60173 Tel: 847-884-6664 Fax: 847-884-6665 E-mail: sales@tocos.com www.tocos.com