


| COMPONENTS | IMPEDANCE |
|-------------------------------|-----------|
| INSULATED SPADE LUGS | N/A |
| STANDARD STACKING BANANA PLUG | N/A |
| | |
| | |

| Standard Lengths | | | |
|------------------|-------|-------------------------|-----------------|
| -6-B | -6-R | 6" | B= Black R= Red |
| -12-B | -12-R | 12" | |
| -18-B | -18-R | 18" | |
| -24-B | -24-R | 24" | |
| -36-B | -36-R | 36" | |
| -48-B | -48-R | 48" | |
| -60-B | -60-R | 60" | |
| -72-B | -72-R | 72" | |
| -xx-B | -xx-R | Custom Length in inches | |



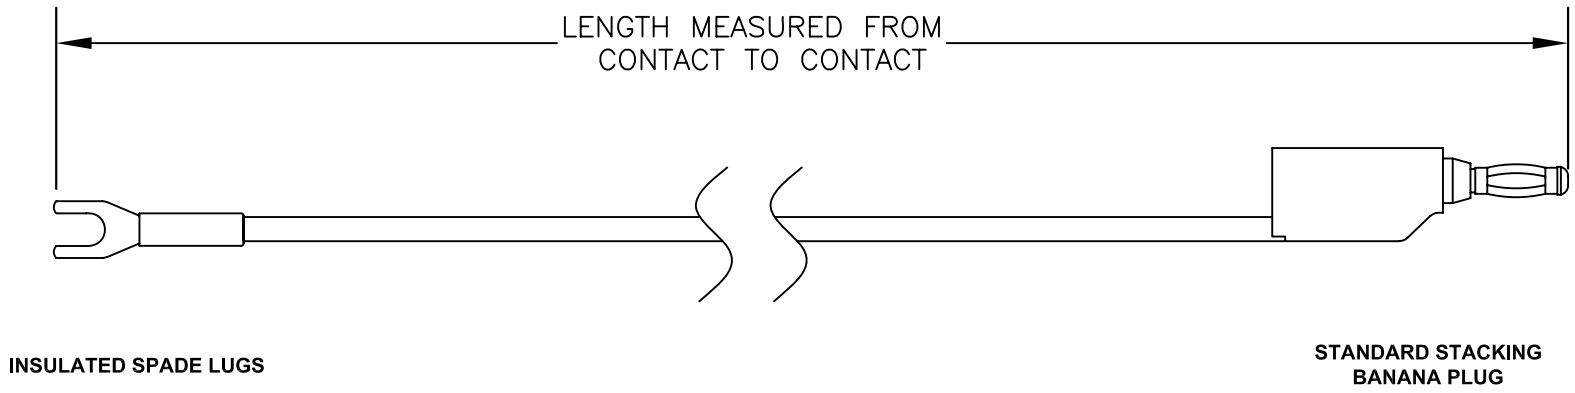

PASTERNAK ENTERPRISES®
ESTABLISHED 1972

PASTERNAK ENTERPRISES, INC.
P.O BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

| | | | |
|------------------|----------------|---|-----------|
| DWG TITLE | | DES. | |
| PE9936-XX | | SINGLE WIRE PATCH CORD, INSULATED SPADE LUGS TO STANDARD STACKING BANANA PLUG | |
| SIZE A | FSCM NO. 53919 | CAD FILE 092407 | SCALE N/A |
| | | | 127 |

- NOTES:**
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES.
 4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 3/8"$, WHICHEVER IS GREATER.