

6

5

4

3





2

1

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/09/10	

APPROVED: _____

DATE: _____ TITLE: _____

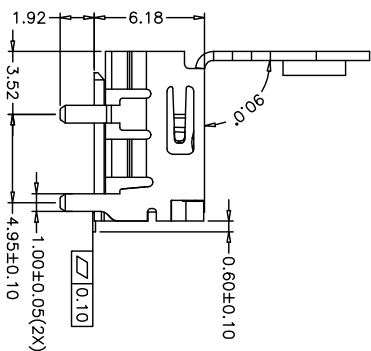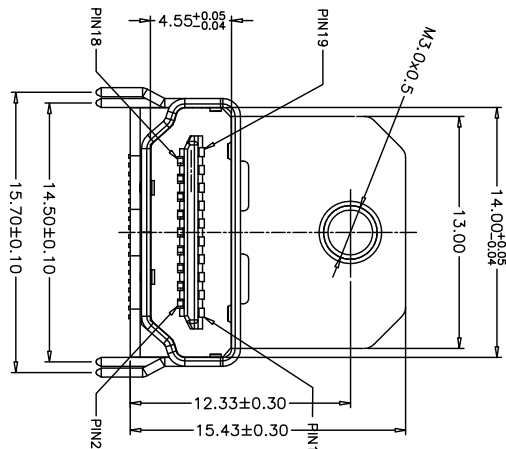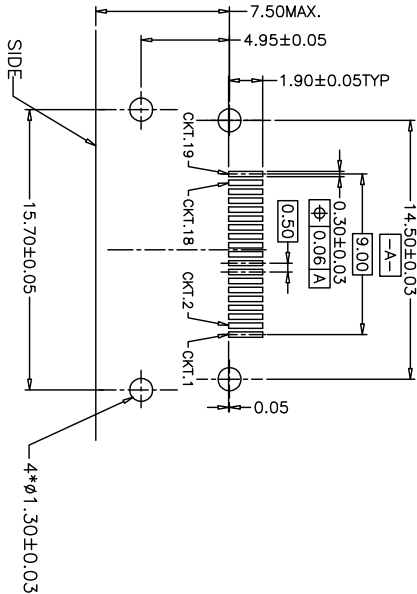

SPECIFICATIONS:

Material:

Housing: Hi-temp thermoplastic, UL 94V-0

Housing color: Black

Contact: Phosphor Bronze

Shield: Brass

Plating:

15u" Gold over Nickel underplate on contact area,

Tin over Copper underplate on tails.

Electrical:

Voltage rating: 40V

Current rating: 0.5A

Dielectric strength: 500VAC for 1 minute min.

Insulation resistance: 100 Megohm min.

Contact resistance: 30 mohms max.

Environmental:

Lead free, RoHS Compliant

Recommended soldering temp: 260°C for 5 seconds.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: HDMI CONNECTOR WITH MOUNTING FLANGE
RIGHT ANGLE, SMT TYPE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM TOLERANCES: EXCEPT AS NOTED			
INCHES			
.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS		DATE	
DRAWN	DY	6/09/10	
CHECKED			
APPROVED			
SIZE	PART NO.		
X	HDMI-S-RA1-SMT-02-MF-15		
REF:	S00015C	SCALE:	NTS
		SHEET	1 OF 1