


SHEET OF





RECOMMENDED PANEL LAYOUT

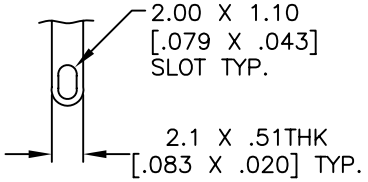

TERMINAL DETAIL
SCALE 2X

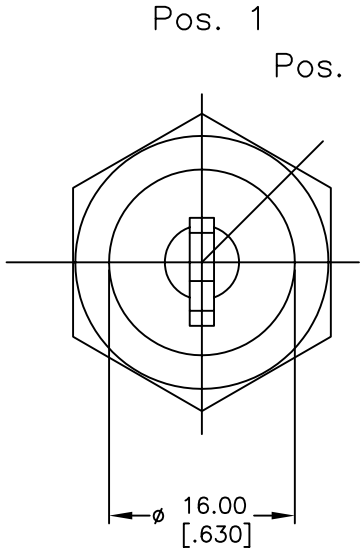


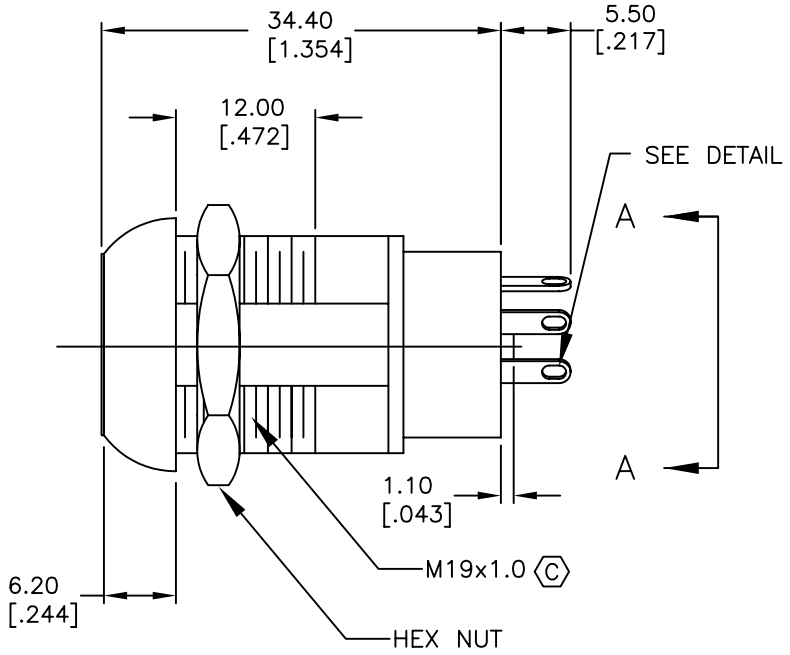

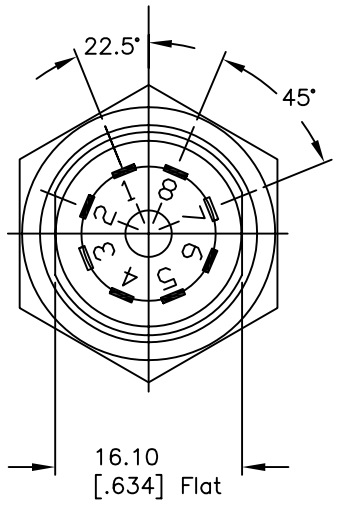

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 4A @125VAC/28VDC, 2A @250VAC
5. DIELECTRIC STRENGTH: 1KV RMS min. at sea level
6. ELECTRICAL LIFE: 10,000 make-and-break cycles at full load.
7. MATERIALS:
   CONTACTS: Silver Plated CU (Q Contact material)
   TERMINALS: Silver Plated Cu (Q Contact material)
   MOUNTING NUT: Nickel Plated zinc alloy
   CONTACT SPRING: Piano Wire
   KEYS: (QTY. 2) Brass with code no. A126
   LOCK: Bright NI plated zinc alloy with NI facing
   TUMBLER Mechanism: 4-disc tumbler cylinder.



CIRCUIT: DP (45° INDEXING)
CONTACT CONFIGURATION

SWITCH FUNCTION	
CONNECTED TERMINAL #	
POS. 1	POS. 2
8-1; 4-5	1-2; 5-6

LEGEND

● =Detent Positions (45°)
◉ =Key pull possible in these positions
▲ =MOMENTARY POS.

REV.	ECN No.	DESCRIPTION	DATE	CHKD
C	19509	CHANGED THREAD DESCRIPTION	12/08/10	BGL
B	14873	REVERSED TERMINAL NUMBERS	4/21/05	JB
A	11566	RELEASE FOR PRODUCTION	8/5/02	CJB

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: K0129F-A126

SCALE	DATE	DR	DWG	REV
1:1.5	8/5/02	CB	K200310	C