



Main

| | |
|------------------------------------|-------------------|
| Accessory / separate part category | Cabling accessory |
| Accessory / separate part type | Jumper cable |

Complementary

| | |
|-------------------------------------|---|
| Jumper cable end 1 | M12 male 4 pins straight connector with screw-on |
| Jumper cable end 2 | M8 female 4 pins straight connector with screw-on |
| Cable composition | 4 x 0.34 mm ² |
| Cable length | 2 m |
| Wire insulation material | PUR |
| Cable outer diameter | 5.2 mm |
| [Ue] rated operational voltage | 60 V AC 75 V DC |
| [In] rated current | 4 A |
| Insulation resistance | >= 1000 MOhm |
| Maximum resistance across terminals | 5000 mOhm |
| Net weight | 0.09 kg |

Environment

| | |
|---------------------------------------|--|
| IP degree of protection | IP67 IP65 IP69K |
| Product certifications | CULus |
| Ambient air temperature for operation | -35...90 °C static -5...90 °C flexing |
| Ambient air temperature for storage | -35...100 °C |

Packing Units

| | |
|------------------------------|--------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Weight | 98 g |
| Package 1 Height | 1.5 cm |
| Package 1 width | 18 cm |
| Package 1 Length | 20 cm |
| Package 2 Weight | 4.4 kg |


Offer Sustainability

| | |
|----------------------------|--|
| Sustainable offer status | Green Premium product |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End of Life Information |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

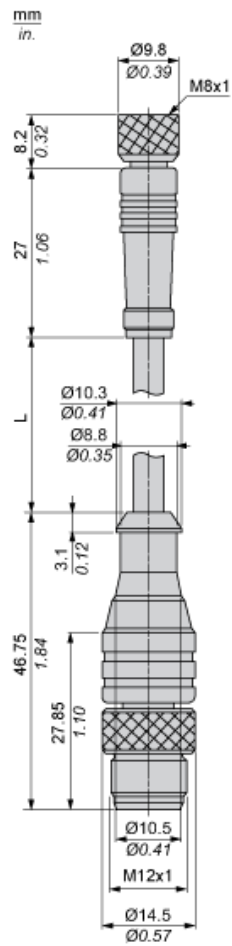

L : Lenght of cable

Connections and Schemes

