

Low Resistance Resettable Fuse PTC SMD0805 Series

Features

RoHS Compliant & Halogen Free

faster tripping, 0805 Dimension, Surface mountable, Solid state

Operation Current: 0.75A~4.0A


Maximum Voltage: 6V / 12Vdc

Operating Temperature: -40°C to +85°C

Agency recognition:



Dimensions(2012mm/ 0805 mils) Unit: mm

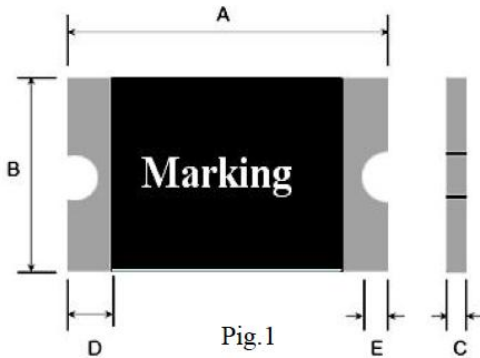

Part number	Marking	A		B		C		D	E	Certification		Delivery Time	
		Min	max	Min	Max	Min	Max	Min	Min	UL	TUV	in stock	Produce
JK-SMD0805-075L	A	2.0	2.20	1.2	1.50	0.3	0.7	0.20	0.1	√	-	3days	18days
JK-SMD0805-075L-12	A	2.0	2.20	1.2	1.50	0.3	0.7	0.20	0.1	√	-	3days	18days
JK-SMD0805-110L	D	2.0	2.20	1.2	1.50	0.3	0.7	0.20	0.1	√	-	3days	18days
JK-SMD0805-110L-12	D	2.0	2.20	1.2	1.50	0.3	0.7	0.20	0.1	√	-	3days	18days
JK-SMD0805-125L	D	2.0	2.20	1.2	1.50	0.3	0.7	0.20	0.1	√	-	3days	18days
JK-SMD0805-125L-12	D	2.0	2.20	1.2	1.50	0.3	0.7	0.20	0.1	√	-	3days	18days
JK-SMD0805-150L	E	2.0	2.20	1.2	1.50	0.4	1.0	0.20	0.1	√	-	3days	18days
JK-SMD0805-150L-12	E	2.0	2.20	1.2	1.50	0.4	1.0	0.20	0.1	√	-	3days	18days
JK-SMD0805-175L	E	2.0	2.20	1.2	1.50	0.4	1.0	0.20	0.1	√	-	3days	18days
JK-SMD0805-175L-12	E	2.0	2.20	1.2	1.50	0.4	1.0	0.20	0.1	√	-	3days	18days
JK-SMD0805-200L	E	2.0	2.20	1.2	1.50	0.4	1.2	0.20	0.1	√	-	3days	18days
JK-SMD0805-200L-12	E	2.0	2.20	1.2	1.50	0.4	1.2	0.20	0.1	√	-	3days	18days
JK-SMD0805-260L	H	2.0	2.20	1.2	1.50	0.4	1.2	0.20	0.1	√	-	3days	18days
JK-SMD0805-260L-12	H	2.0	2.20	1.2	1.50	0.4	1.2	0.20	0.1	√	-	3days	18days

Dimensions(2012mm/ 0805 mils) Unit: mm



Part number	Marking	A		B		C		D	E	Certification		Delivery Time	
		Min	max	Min	Max	Min	Max	Min	Min	UL	TUV	in stock	Produce
JK-SMD0805-300L	H	2.0	2.20	1.2	1.50	0.5	1.4	0.20	0.1	√	-	3days	18days
JK-SMD0805-300L-12	H	2.0	2.20	1.2	1.50	0.5	1.4	0.20	0.1	√	-	3days	18days
JK-SMD0805-350L	K	2.0	2.20	1.2	1.50	0.5	1.4	0.20	0.1	√	-	3days	18days
JK-SMD0805-350L-12	K	2.0	2.20	1.2	1.50	0.5	1.4	0.20	0.1	√	-	3days	18days
JK-SMD0805-380L	K	2.0	2.20	1.2	1.50	0.6	1.6	0.20	0.1	√	-	3days	18days
JK-SMD0805-380L-12	K	2.0	2.20	1.2	1.50	0.6	1.6	0.20	0.1	√	-	3days	18days
JK-SMD0805-400L	K	2.0	2.20	1.2	1.50	0.6	1.6	0.20	0.1	√	-	3days	18days
JK-SMD0805-400L-12	K	2.0	2.20	1.2	1.50	0.6	1.6	0.20	0.1	√	-	3days	18days

Electrical characteristics(25°C)

Part Number	I _{Hold}	I _{Trip}	V _{max}	I _{max}	P _d Max	Maximum Time to Trip		Resistance (Ω)		Certification		Delivery Time	
	A	A	DC	A	W	Current (A)	Time (S)	R _{imin}	R _{1max}	UL	TUV	in stock	Produce
JK-SMD0805-075L	0.75	1.5	6V	50	0.7	8.0	1.0	0.020	0.160	√	-	3days	18days
JK-SMD0805-075L-12	0.75	1.5	12V	50	0.7	8.0	1.0	0.020	0.160	√	-	3days	18days
JK-SMD0805-110L	1.1	2.2	6V	50	0.7	8.0	1.0	0.018	0.110	√	-	3days	18days
JK-SMD0805-110L-12	1.1	2.2	12V	50	0.7	8.0	1.0	0.018	0.110	√	-	3days	18days
JK-SMD0805-125L	1.25	2.5	6V	50	0.7	8.0	1.0	0.016	0.100	√	-	3days	18days
JK-SMD0805-125L-12	1.25	2.5	12V	50	0.7	8.0	1.0	0.016	0.100	√	-	3days	18days
JK-SMD0805-150L	1.5	3.0	6V	50	0.7	8.0	1.0	0.008	0.065	√	-	3days	18days
JK-SMD0805-150L-12	1.5	3.0	12V	50	0.7	8.0	1.0	0.008	0.065	√	-	3days	18days
JK-SMD0805-175L	1.75	3.5	6V	50	0.7	8.75	2.0	0.008	0.055	√	-	3days	18days
JK-SMD0805-175L-12	1.75	3.5	12V	50	0.7	8.75	2.0	0.008	0.055	√	-	3days	18days
JK-SMD0805-200L	2.0	4.0	6V	50	0.7	10.0	2.0	0.006	0.045	√	-	3days	18days
JK-SMD0805-200L-12	2.0	4.0	12V	50	0.7	10.0	2.0	0.006	0.045	√	-	3days	18days
JK-SMD0805-260L	2.6	5.2	6V	50	0.7	13.0	2.0	0.003	0.035	√	-	3days	18days
JK-SMD0805-260L-12	2.6	5.2	12V	50	0.7	13.0	2.0	0.003	0.035	√	-	3days	18days
JK-SMD0805-300L	3.0	6.0	6V	50	0.8	15.0	2.0	0.003	0.030	√	-	3days	18days
JK-SMD0805-300L-12	3.0	6.0	12V	50	0.8	15.0	2.0	0.003	0.030	√	-	3days	18days
JK-SMD0805-350L	3.5	7.0	6V	50	0.8	17.5	2.0	0.003	0.025	√	-	3days	18days
JK-SMD0805-350L-12	3.5	7.0	12V	50	0.8	17.5	2.0	0.003	0.025	√	-	3days	18days

Specifications are subject to change without notice

Tel: +86-755-27465585

Electrical characteristics(25°C)

Part Number	I _{Hold}	I _{Trip}	V _{max}	I _{max}	P _d Max	Maximum Time to Trip		Resistance (Ω)		Certification		Delivery Time	
	A	A	DC	A	W	Current (A)	Time (S)	R _{imin}	R _{1max}	UL	TUV	in stock	Produce
JK-SMD0805-380L	3.8	7.6	6V	50	0.8	19.0	2.0	0.003	0.020	√	-	3days	18days
JK-SMD0805-380L-12	3.8	7.6	12V	50	0.8	19.0	2.0	0.003	0.020	√	-	3days	18days
JK-SMD0805-400L	4.0	8.0	6V	50	0.8	20.0	2.0	0.003	0.015	√	-	3days	18days
JK-SMD0805-400L-12	4.0	8.0	12V	50	0.8	20.0	2.0	0.003	0.015	√	-	3days	18days

I_{hold} = Hold Current. Maximum current device will not trip in 25°C still air.

I_{trip} = Trip Current. Minimum current at which the device will always trip in 25°C still air.

V_{max} = Maximum operating voltage device can withstand without damage at rated current (I_{max}).

I_{max} = Maximum fault current device can withstand without damage at rated voltage (V_{max}).

Maximum Time-to-trip: Maximum time to trip at assigned current.

P_d=Maximum power dissipation when device is in the tripped state in 25°C still air environment at rated voltage.

R_{imin/max} = Minimum/Maximum device resistance prior to tripping at 25°C.

R_{1max} = Maximum device resistance is measured one hour post reflow.

Thermal Derating Chart-IH(A)

Part Number	Maximum ambient operating temperatures °C								
	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
JK-SMD0805-075L	1.07	0.94	0.88	0.75A	0.66	0.63	0.60	0.48	0.34
JK-SMD0805-075L-12	1.07	0.94	0.88	0.75A	0.66	0.63	0.60	0.48	0.34
JK-SMD0805-110L	1.57	1.38	1.29	1.10A	0.98	0.92	0.88	0.71	0.50
JK-SMD0805-110L-12	1.57	1.38	1.29	1.10A	0.98	0.92	0.88	0.71	0.50
JK-SMD0805-125L	1.78	1.57	1.47	1.25A	1.11	1.05	1.00	0.81	0.57
JK-SMD0805-125L-12	1.78	1.57	1.47	1.25A	1.11	1.05	1.00	0.81	0.57
JK-SMD0805-150L	2.14	1.88	1.76	1.50A	1.33	1.25	1.20	0.97	0.68
JK-SMD0805-150L-12	2.14	1.88	1.76	1.50A	1.33	1.25	1.20	0.97	0.68
JK-SMD0805-175L	2.50	2.19	2.05	1.75A	1.55	1.46	1.40	1.13	0.79
JK-SMD0805-175L-12	2.50	2.19	2.05	1.75A	1.55	1.46	1.40	1.13	0.79
JK-SMD0805-200L	2.85	2.51	2.35	2.00A	1.77	1.67	1.60	1.29	0.91
JK-SMD0805-200L-12	2.85	2.51	2.35	2.00A	1.77	1.67	1.60	1.29	0.91
JK-SMD0805-260L	3.71	3.25	3.06	2.60A	2.30	2.17	2.08	1.68	1.18
JK-SMD0805-260L-12	3.71	3.25	3.06	2.60A	2.30	2.17	2.08	1.68	1.18
JK-SMD0805-300L	4.29	3.75	3.53	3.00A	2.65	2.50	2.40	1.94	1.36
JK-SMD0805-300L-12	4.29	3.75	3.53	3.00A	2.65	2.50	2.40	1.94	1.36

Specifications are subject to change without notice

3

Tel: +86-755-27465585

HUAAN LIMITED

www.huaandz.com

Email: sales@huaandz.com

Thermal Derating Chart-IH(A)




Maximum ambient operating temperatures °C

Part Number	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
JK-SMD0805-350L	5.00	4.38	4.12	3.50A	3.09	2.92	2.80	2.26	1.59
JK-SMD0805-350L-12	5.00	4.38	4.12	3.50A	3.09	2.92	2.80	2.26	1.59
JK-SMD0805-380L	5.43	4.76	4.47	3.80A	3.35	3.17	3.04	2.45	1.73
JK-SMD0805-380L-12	5.43	4.76	4.47	3.80A	3.35	3.17	3.04	2.45	1.73
JK-SMD0805-400L	5.72	5.00	4.71	4.00A	3.53	3.33	3.20	2.59	1.81
JK-SMD0805-400L-12	5.72	5.00	4.71	4.00A	3.53	3.33	3.20	2.59	1.81

Part number System

JK- SMD 0805 -xxx L- 12

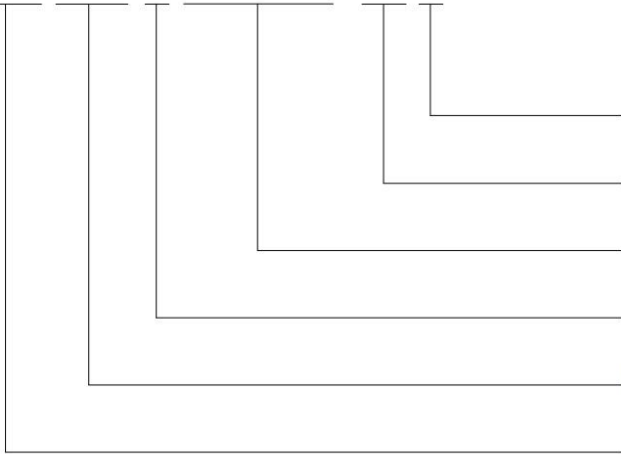

- 12V Products
- Low Resistance
- Holding Current Rating
- Surface Mount Device
- 0805 Dimension
- Our Mark



Test Procedures and Requirements

Test	Test Conditions	Accept/Reject Criteria
Resistance	In still air @ 25°C	$R_{min} \leq R \leq R_{max}$
Time to Trip	Specified current, V_{max} , 25°C	Tmaximum Time to Trip
Hold Current	30min , at I_H	No trip
Trip Cycle Life	V_{max} , I_{max} , 100cycles	No arcing or burning
Trip Endurance	V_{max} , 1hours	No arcing or burning


Physical Characteristics

Terminal materials :	Tin-Plated Nickle-copper
Soldering zone	Meets EIA specification RS 186-9E and ANSI/J-STD-002 Category 3.
Moisture Sensitivity	Level 2a, per IPC/JEDEC J-STD 020C


Environmental Specifications

Test item	Conditions	Resistance change
Passive aging	+85°C, 1000hours	±10% typical
Humidity aging	+85°C/85%R.H.1000hours	±5% typical
Thermal shock	MIL-STD-202,Method 107G ,+85°C/-40°C,20times	-30% typical resistance change
Solvent Resistance	MIL-STD-202,Method 215	No change
Vibration	ML-STD-883C,Test Condition A	No change

Recommended Pad layout(mm)



Solder reflow conditions

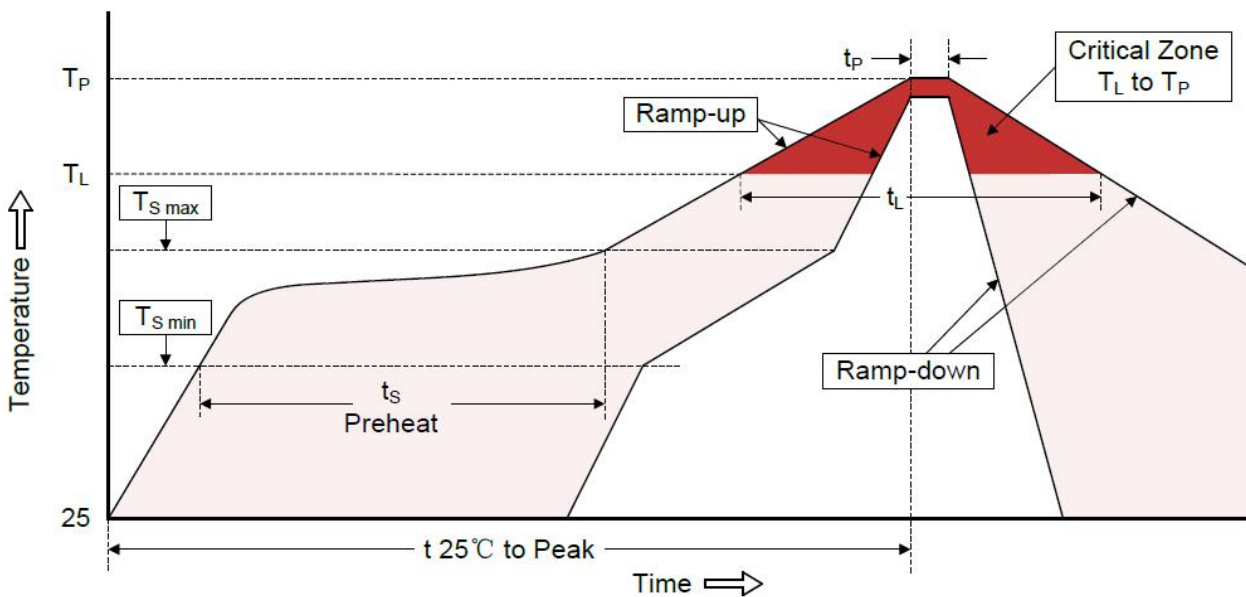

- Recommended reflow methods: IR, vapor phase oven, hot air oven, N2 environment for lead-free
- Devices are not designed to be wave soldered to the bottom side of the board.
- Recommended maximum paste thickness is 0.25mm (0.010 inch)
- Device can be cleaned using standard industry methods and solvents.
- Soldering temperature profile meets RoHs leadfree process.


Note : If reflow temperatures exceed the recommended profile, devices may not meet the performance Requirements

Solder reflow conditions

Profile Feature	Pb-Free Assembly
Average ramp-up rate (TS max to TP)	3°C/second max.
Preheat	
-Temperature Min (TS min)	150°C
-Temperature Max (TS max)	200°C
-Time (min to max) (TS min to TS max)	60-180 seconds
Time maintained above:	
-Temperature (TL)	217°C
-Time (tL)	60-150 seconds
Peak Temperature (TP)	260°C
Time within 5°C of actual Peak Temperature (tP)	20-40 seconds
Ramp-down Rate	3°C/second max.
Time 25°C to Peak Temperature	8 minutes max.
Storage Condition	0°C~35°C, ≤70%RH

Tape Specification and Reel Dimensions

Tape

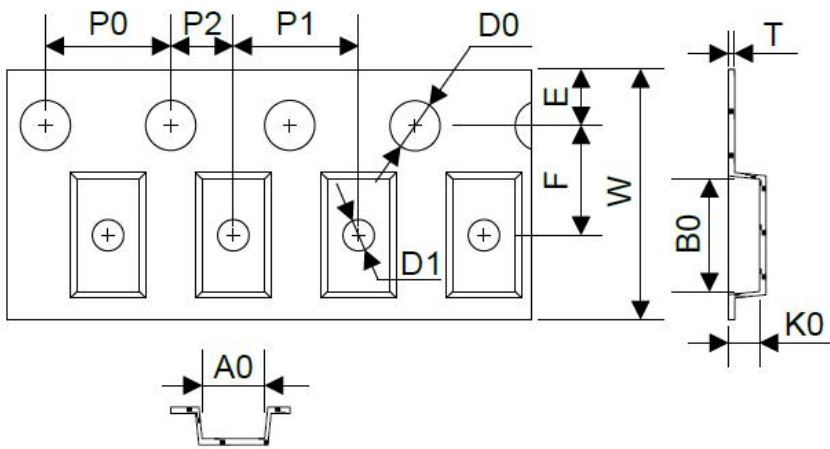

Symbol	Dimensions(mm)
--------	----------------

W	8.00±0.30
---	-----------

F	3.50±0.05
---	-----------

E	1.75±0.10
---	-----------

D0	1.55±0.05
----	-----------

D1	1.00(MIN)
----	-----------

P0	4.00±0.10
----	-----------

P1	4.00±0.10
----	-----------

P2	2.00±0.05
----	-----------

A0	1.60±0.10
----	-----------

B0	2.30±0.10
----	-----------


T	0.25±0.10
---	-----------

K0	0.9/1.5±0.10
----	--------------

Leader min	390
------------	-----

Trailer min	160
-------------	-----

Reel



C	Φ178±1.0
---	----------

D	Φ60.2±0.5
---	-----------

H	11.0±0.5
---	----------

W	9.0±1.5
---	---------

Packaging Quantity



Part Number	Quantity	Part Number	Quantity	Part Number	Quantity
JK-SMD0805-075L	5000PCS	JK-SMD0805-175L	5000PCS	JK-SMD0805-350L	4000PCS
JK-SMD0805-075L-12	5000PCS	JK-SMD0805-175L-12	5000PCS	JK-SMD0805-350L-12	4000PCS
JK-SMD0805-110L	5000PCS	JK-SMD0805-200L	5000PCS	JK-SMD0805-380L	4000PCS
JK-SMD0805-110L-12	5000PCS	JK-SMD0805-200L-12	5000PCS	JK-SMD0805-380L-12	4000PCS
JK-SMD0805-125L	5000PCS	JK-SMD0805-260L	4000PCS	JK-SMD0805-400L	4000PCS
JK-SMD0805-125L-12	5000PCS	JK-SMD0805-260L-12	4000PCS	JK-SMD0805-400L-12	4000PCS
JK-SMD0805-150L	5000PCS	JK-SMD0805-300L	4000PCS	----	----
JK-SMD0805-150L-12	5000PCS	JK-SMD0805-300L-12	4000PCS	----	----

Storage

The maximum ambient temperature shall not exceed 40°C. Storage temperatures higher than 40°C could result in the deformation of packaging materials. The maximum relative humidity recommended for storage is 70%. High humidity with high temperature can accelerate the oxidation of the solder plating on the termination and reduce the solderability of the components. Sealed plastic bags with desiccant shall be used to reduce the oxidation of the termination and shall only be opened prior to use. The products shall not be stored in areas where harmful gases containing sulfur or chlorine are present.

Warning

- Please read this specification before using the product.
- Use PPTC beyond the maximum ratings or improper use may result in device damage and possible electrical arcing and flame.
- PPTC are intended for protection against occasional over current or over temperature fault conditions and should not be used when repeated fault conditions or prolonged trip events are anticipated.
- Device performance can be impacted negatively if devices are handled in a manner inconsistent with recommended electronic, thermal, and mechanical procedures for electronic components.
- Use PPTC with a large inductance in circuit will generate a circuit voltage (L di/dt) above the rated voltage of the PPTC.
- Avoid impact PPTC device its thermal expansion like placed under pressure or installed in limited space.
- Contamination of the PPTC material with certain silicon based oils or some aggressive solvents can adversely impact the performance of the devices. PPTC SMD can be cleaned by standard methods.
- Requests that customers comply with our recommended solder pad layouts and recommended reflow profile. Improper board layouts or reflow profile could negatively impact solderability performance of our devices.

Notes

The specification is intended to present application, product and technical data to assist the user in selecting PPTC circuit production devices. However, users should independently evaluate and test the suitability of each product. HUAAN makes no warranties as to the accuracy or completeness of the information and disclaims any liability resulting from its use. HUAAN's only obligations are those in the HUAAN Standard Terms and Conditions of Sale and in no case will HUAAN be liable for any incidental, indirect, or consequential damages arising from the sale, resale, or misuse of its products. HUAAN reserves the right to change of update, without notice, any information contained in this specification.