
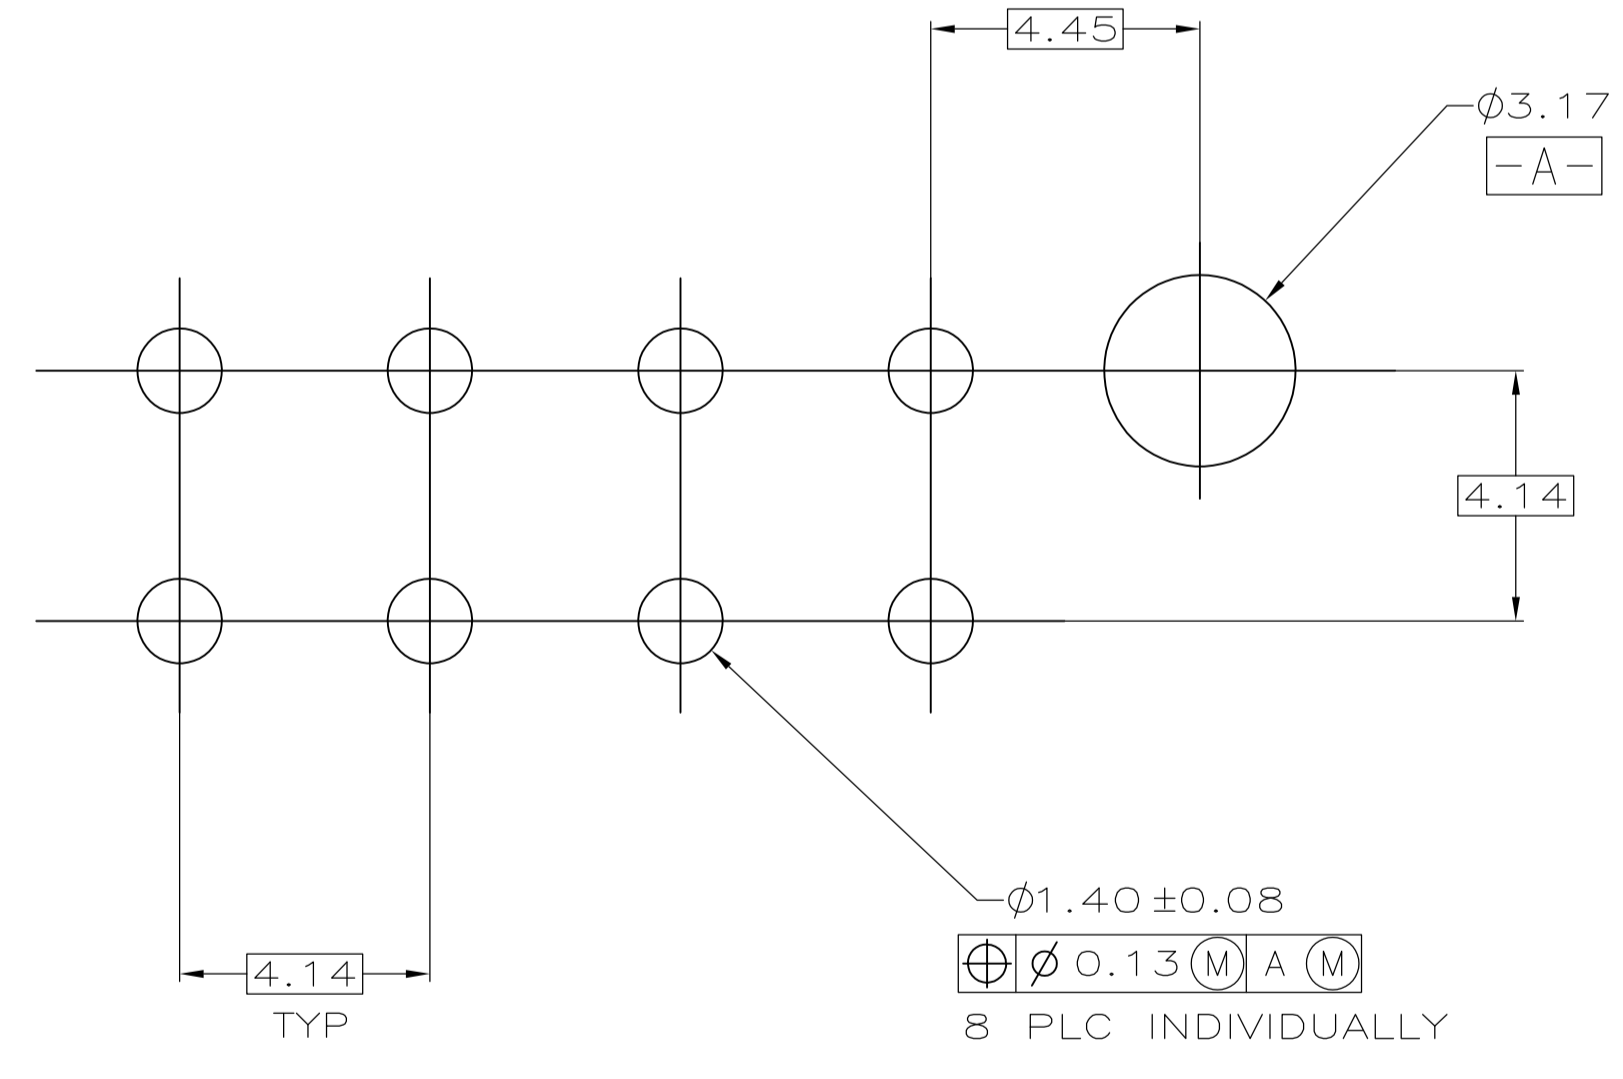
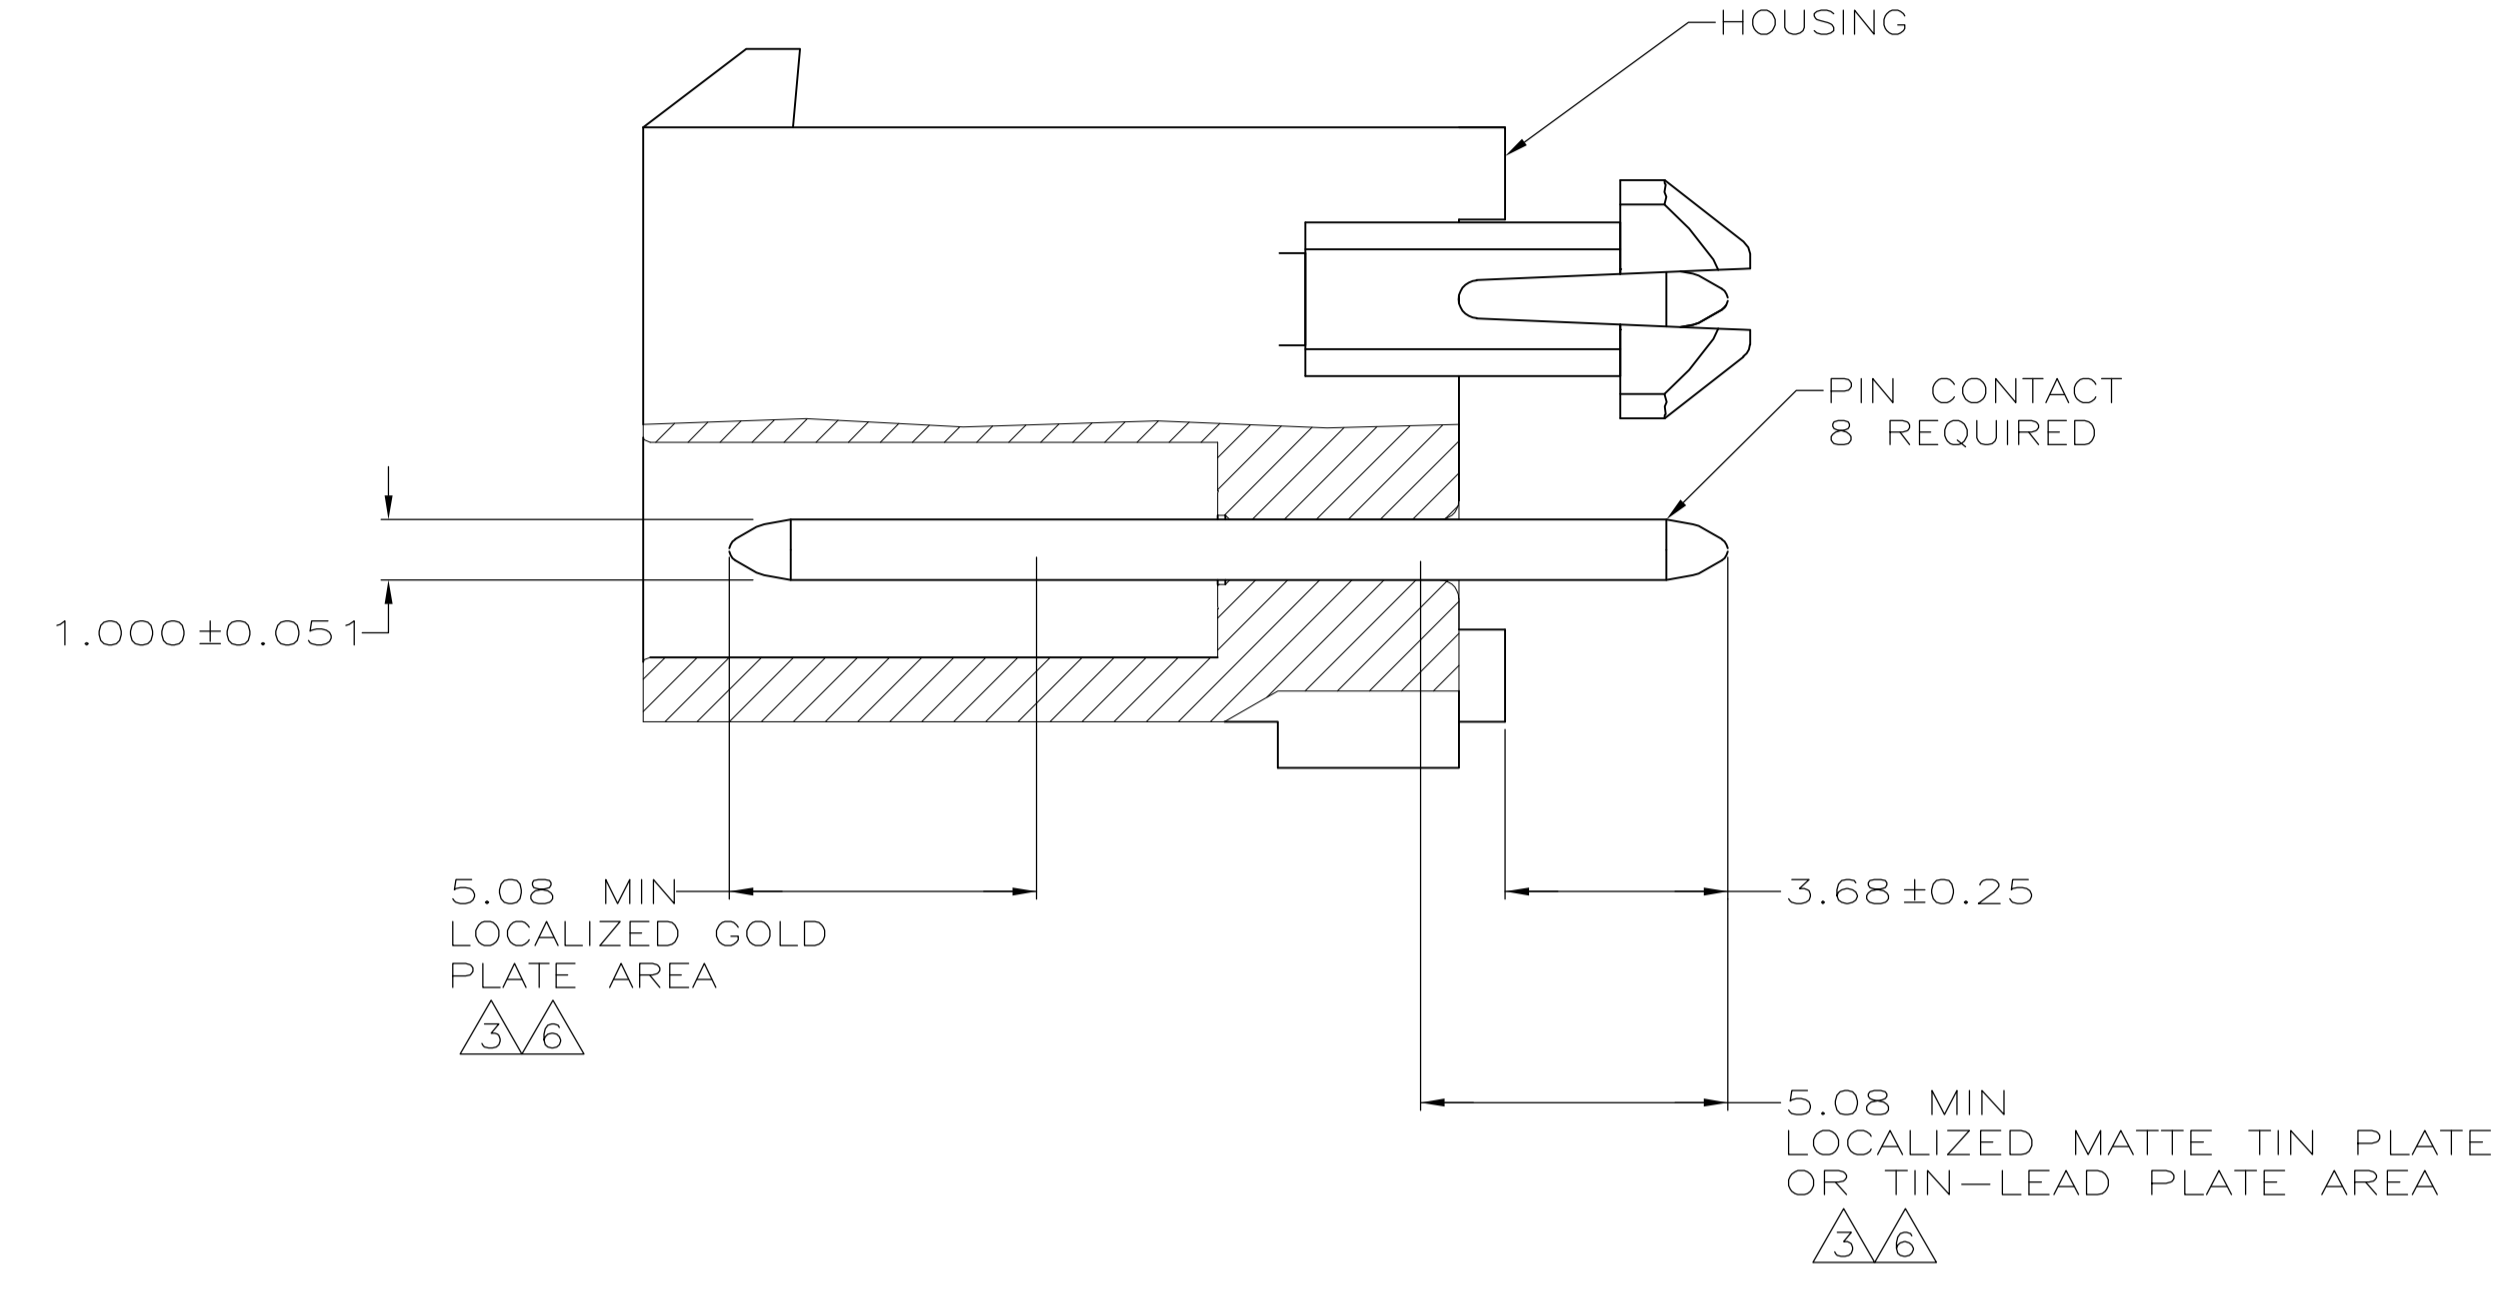
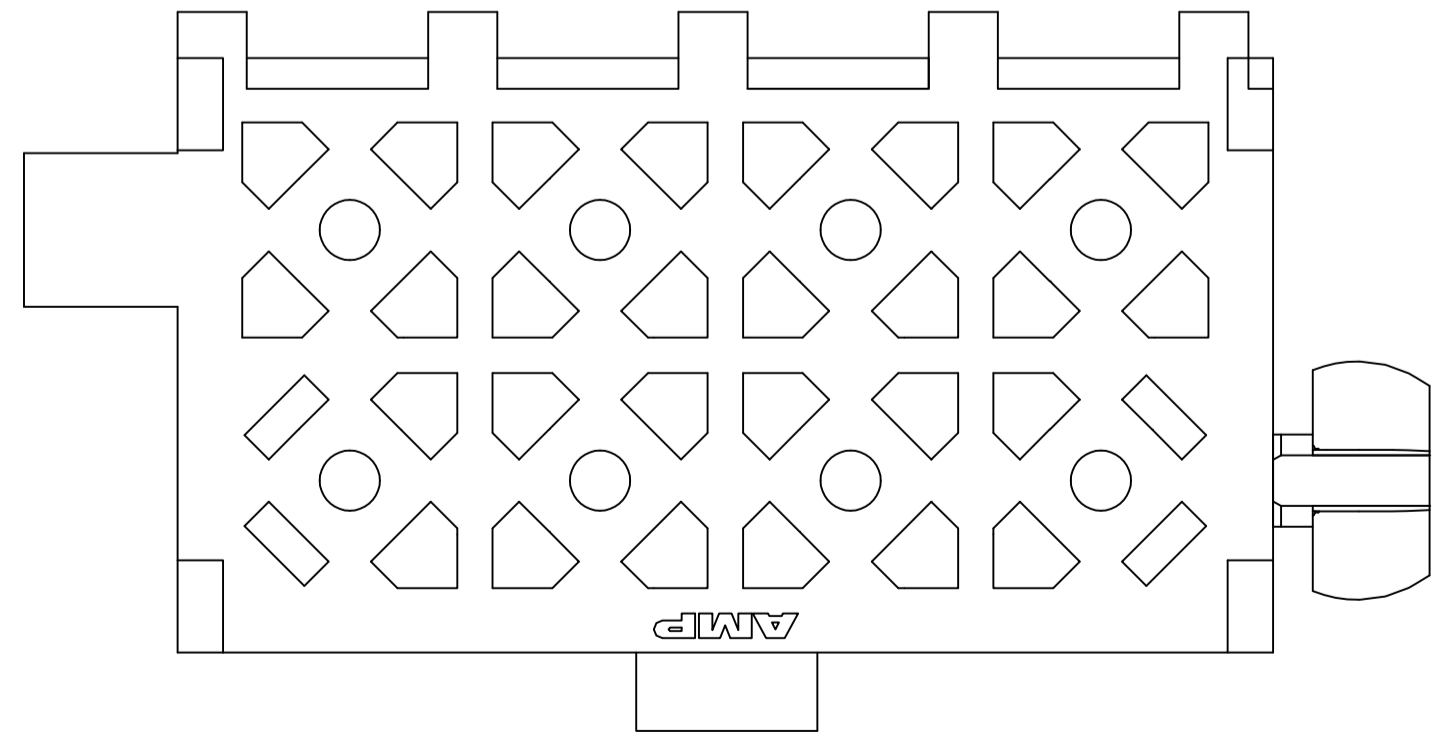
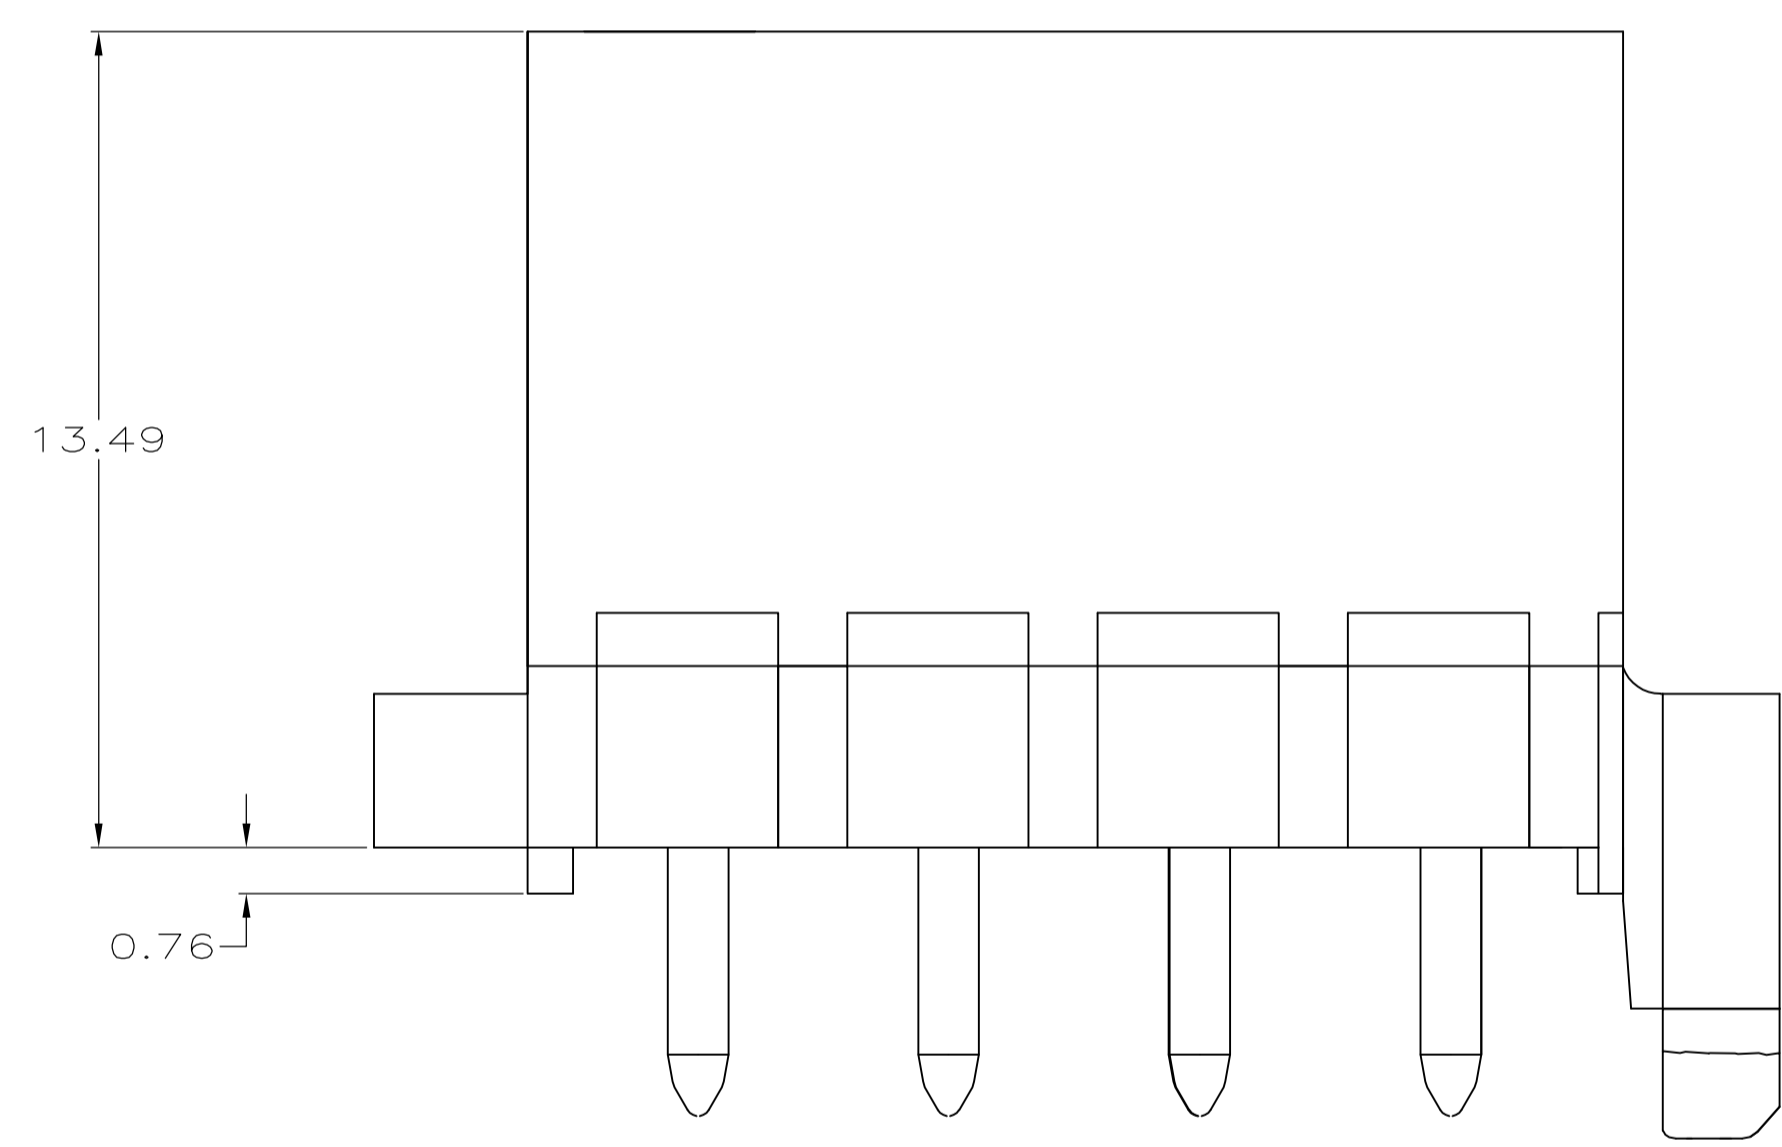


REVISIONS				
NO.	DESCRIPTION	DATE	DWN	APVD
D2	REVISED PER ECO-11-004917	11MAR11	RK	HMR

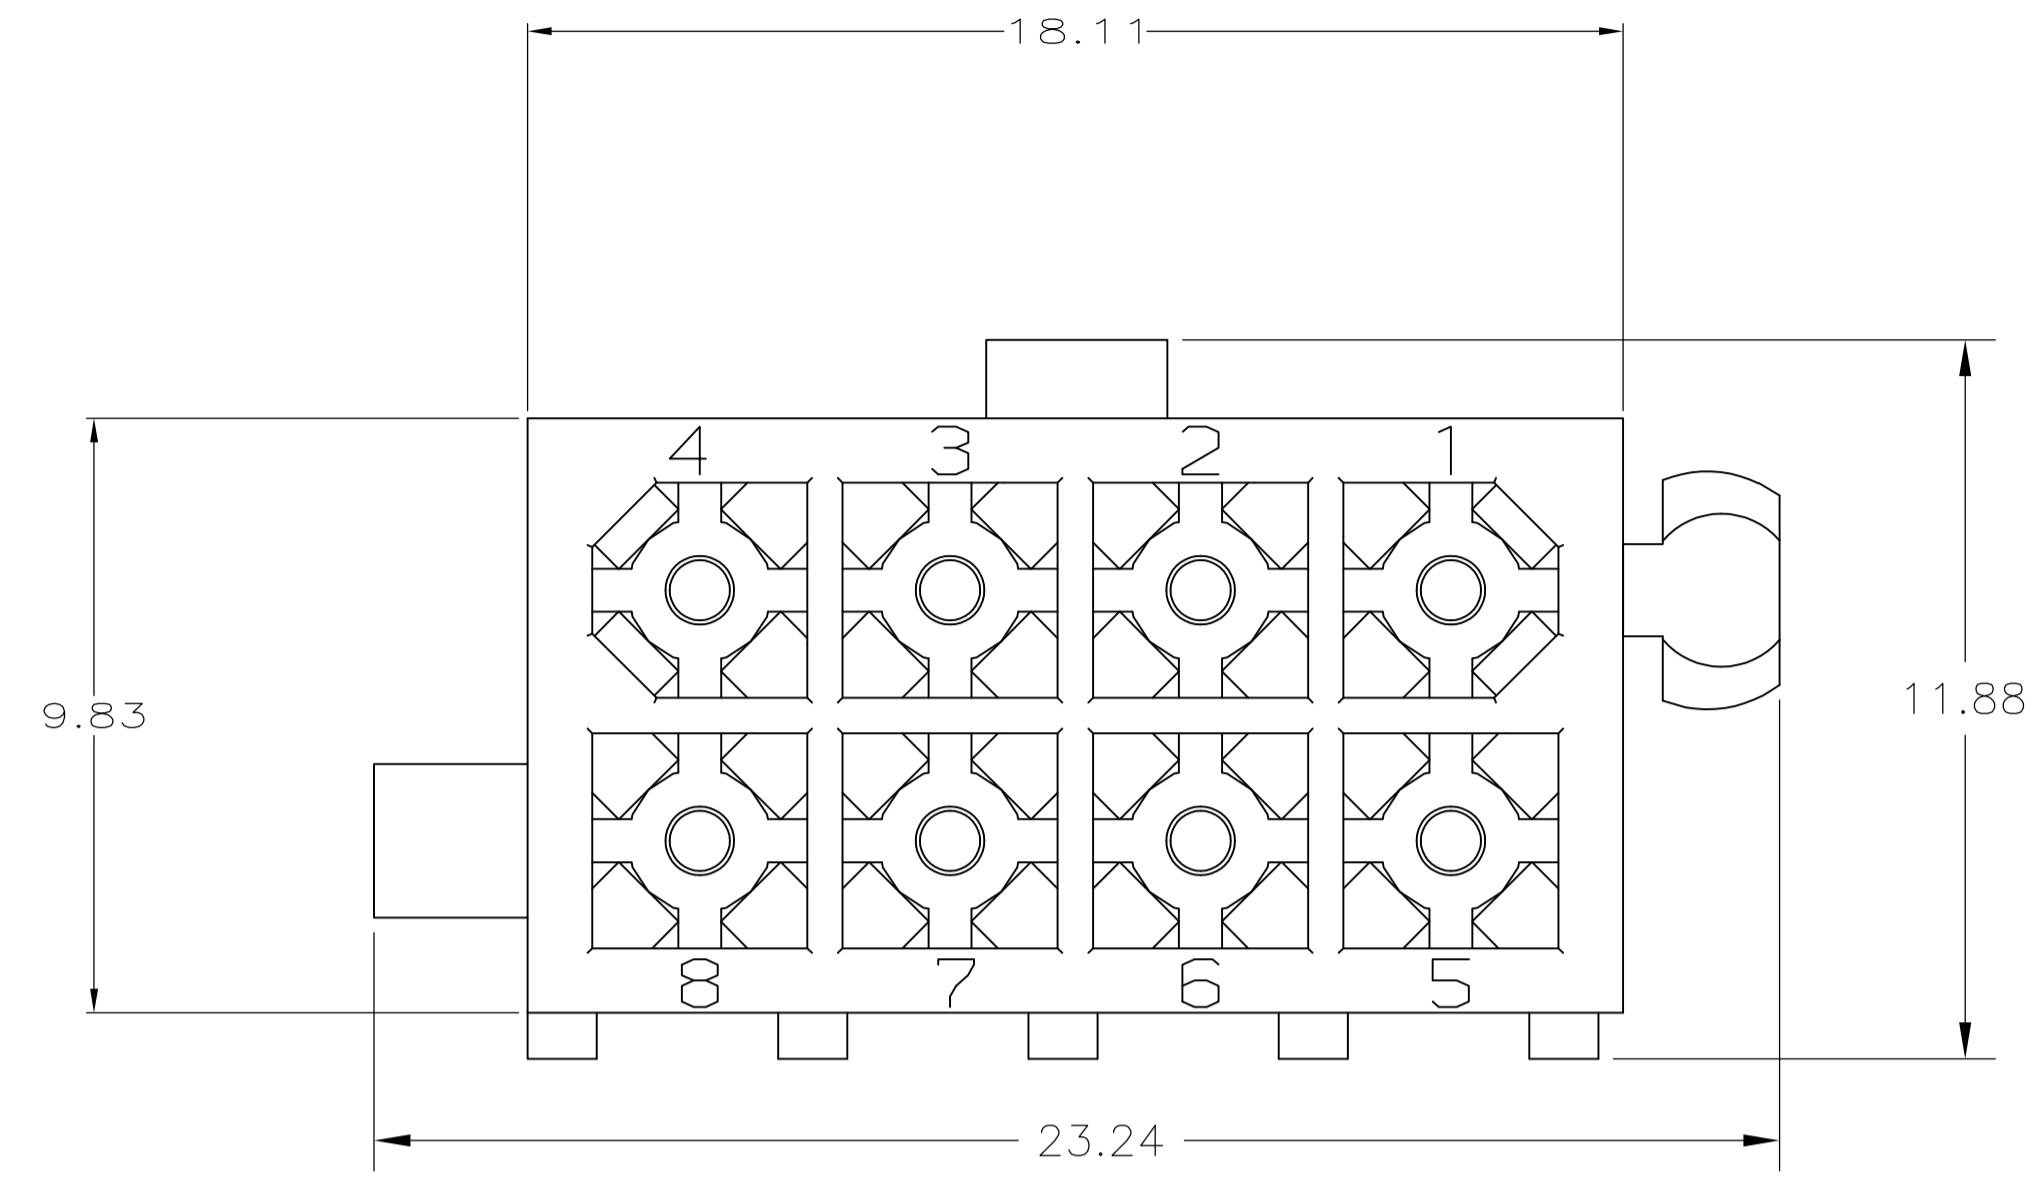

RECOMMENDED MOUNTING HOLE PATTERN FOR 1.57 THICK P.C. BOARD

- PINS TO COMPLY WITH AMP SOLDERABILITY SPEC. 109-11-3.
- 0.00381 MIN MATTE TIN LEAD PLATE OVER 0.00127 MIN NICKEL.
- 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN LEAD IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.
- 0.00381 MIN MATTE TIN PLATE OVER 0.00127 MIN NICKEL.
- 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

MATERIAL	FINISH	MATERIAL	COLOR	PART NO.
BRASS, TIN	4	HIGH TEMP NYLON, UL94V-2	BLACK	6-794065-0
BRASS, TIN	4	HIGH TEMP NYLON, UL94V-0	BLACK	5-794065-0
BRASS, GOLD	5	NYLON, UL94V-0	WHITE	1-794065-1
BRASS, TIN	4	NYLON, UL94V-0	WHITE	1-794065-0
BRASS, GOLD	3	NYLON, UL94V-0	WHITE	794065-2
BRASS, TIN-LEAD	2	NYLON, UL94V-0	WHITE	794065-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN S CARPENTER	09JUN05	STC TE Connectivity	
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK R JONES	28JUL2003	NAME	
mm	0 PLC ± -	APVD R JONES	28JUL2003	PRODUCT SPEC	
	1 PLC ± -			APPLICATION SPEC	
	2 PLC ± 0.13			SIZE	
	3 PLC ± -			CASE CODE DRAWING NO	
	4 PLC ± -			RESTRICTED TO	
	ANGLES ± -			WEIGHT	
MATERIAL	FINISH			A1 00779 C=794065	
				CUSTOMER DRAWING	
				SCALE 8:1 SHEET 1 of 1 REV D2	