

REV	DESCRIPTION	BY DATE	APPD
D	REVISED PER ER7306	CWB 04/11/08	CWB

NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR GENERAL SERIES SPECIFICATIONS, SEE SD74-0000.
2. MATERIAL SPECIFICATIONS:
   COPPER ALLOY
3. FINISH SPECIFICATIONS:
   .000030 MIN. GOLD PER ASTM B488 OVER .000080 MIN. NICKEL PER AMS QQ-N-290.
4. ELECTRICAL SPECIFICATIONS:
   CURRENT RATING: 10 AMPS
5. FOR USE WITH 16 AWG WIRE OR EQUIVALENT.
6. REFER TO CAP10-01 FOR CABLE ASSEMBLY PROCEDURE.

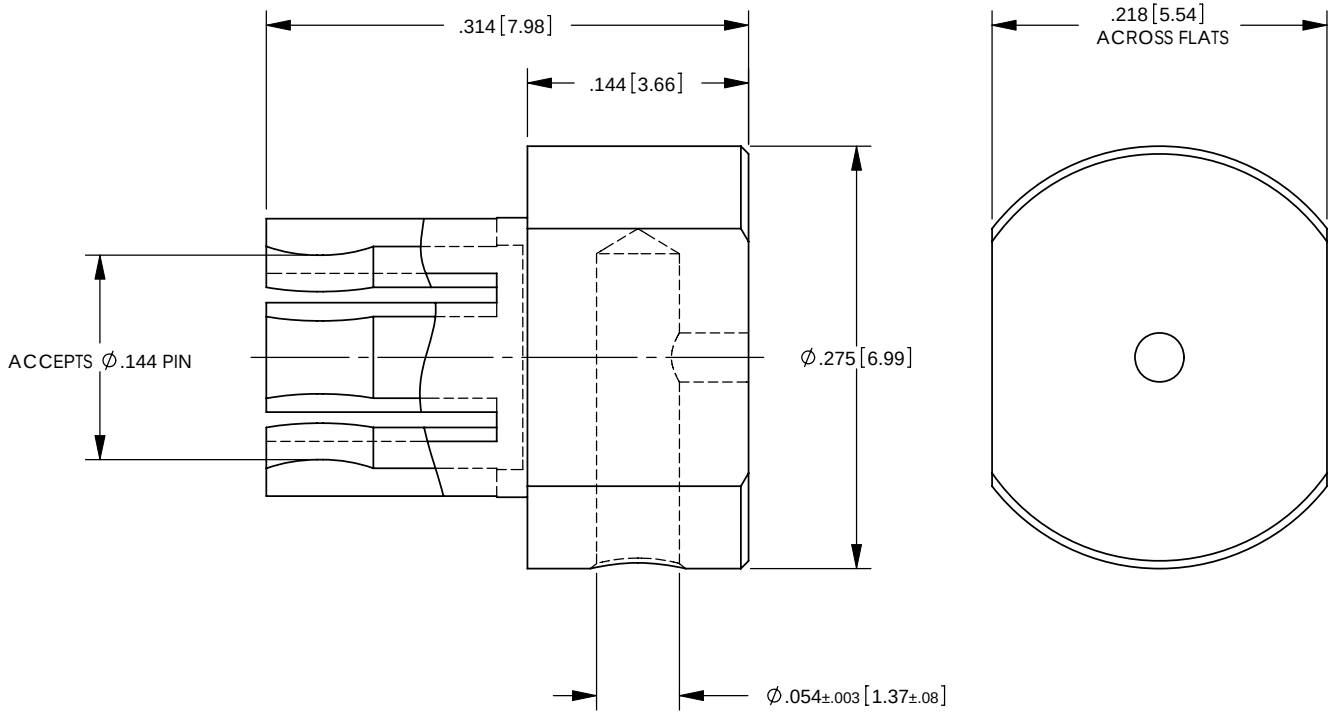

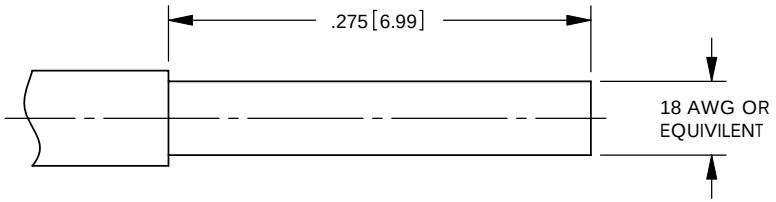

RECOMMENDED CABLE TRIM DIMENSIONS

CATALOG P/N: 01432G

PER ASME Y14.5M-1994
UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES [MM]
TOLERANCES:
DECIMAL: .XX [X.X] ± .01 [0.3]
.XXX [X.XX] ± .005 [0.13]
.XXXX [X.XXX] ± .XXXX
ANGLES: ± 2°
SCALE: 8:1

CUSTOMER DRAWING

DRAWN	DATE	APPROVED	DATE
PSM	03/08/07	DCam	05/16/07
APPROVED	DATE	APPROVED	DATE
XXX	XX/XX/XX	WPM	05/16/07

WinchesterElectronics
Winchester Electronics Corporation
62 Barnes Industrial Road North
Wallingford, Connecticut 06492

POWER SNAP,
RIGHT ANGLE SOLDER MOUNT
18 AWG, 10 AMP

A	SD01432G	SHT 1 OF 1	REV D