
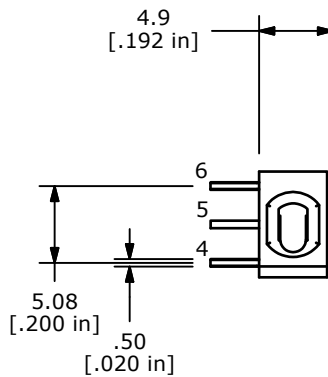
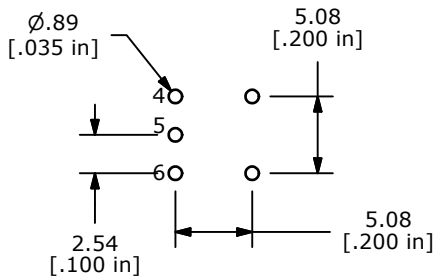


▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	OFF	ON
5-6	OPEN	5-4



▲ CIRCUIT: SPDT
ON-OFF-ON

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25

3. TERMINAL NUMBERS FOR REF ONLY

- ▲4. STATIONARY CONTACTS: COPPER ALLOY W/GOLD PLATING

- ▲5. MOVING CONTACTS: COPPER ALLOY W/ GOLD PLATING

5. RATING: 0.4 VA max. @ 20V AC OR DC max.

6. CONTACT RESISTANCE: <100 MILLI-OHM

7. MECHANICAL LIFE: 40,000 MAKE-AND-BREAK CYCLES.

8. INSULATION RESISTANCE: 500 MEGA-OHM min.



9. DIELECTRIC STRENGTH: 500 V RMS @SEA LEVEL.

10. OPERATING TEMP.: -30°C to 85°C

- 11.▲ DENOTES CRITICAL PARAMETER.

12. SEAL RATING: IP67

13. 2002/95/EC (ROHS) COMPLIANT

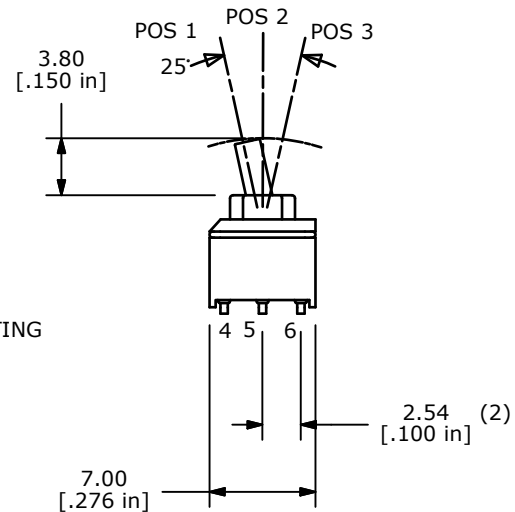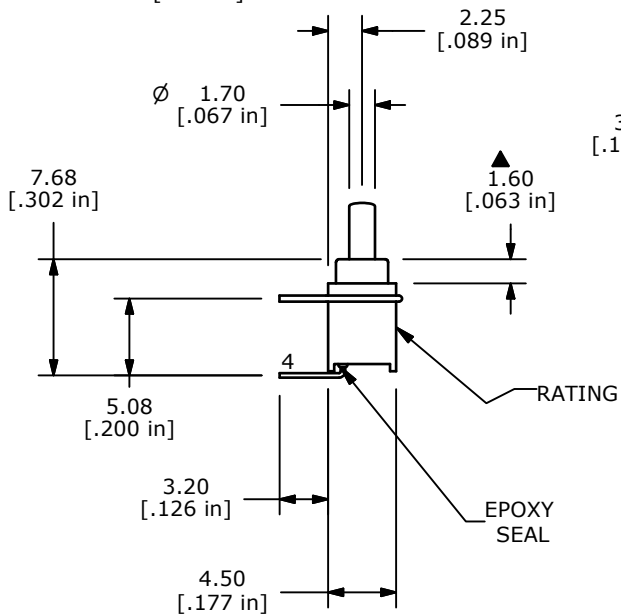

C	21776	Add 2.25 Dim, centerline of switch	1/28/15	rc
B	19606	UPDATE PLATING NOTE	01/20/11	BMA
A	19486	New Release	12/02/10	BMA
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE 200USP3T1A1M6RE

SCALE 2:1

DATE 12/2/2010

DR	BMA
----	-----

DWG T250007

REV
C