
CMD260
13 GHz Diplexer

The CMD260 Diplexer is available in three 90 MHz Passband configurations. Please contact CMT for your specific application.

Receive Channel		Transmit Channel	
Passband:	**(-1) 12.745 - 12.835 MHz**	**Passband:**	**(-1) 13.011 – 13.101 MHz**
	(-2) 12.825 – 12.915 MHz		**(-2) 13.091 – 13.181 MHz**
	(-3) 12.905 – 12.995 MHz		**(-3) 13.171 – 13.261 MHz**
Insertion Loss:	**1.2 dB max.**	**Insertion Loss:**	**1.2 dB max.**
Flatness:	**0.2 dB max.**	**Flatness:**	**0.2 dB max.**
Return Loss:	**20.0 dB min.**	**Return Loss:**	**20.0 dB min.**
Rejection:		**Rejection:**	
TX Passband:	**65 dB min**	**RX Passband:**	**65 dB min.**
Isolation Tx to Rx:	**65 dB min.**	**Isolation Rx to Tx:**	**65 dB min.**

Operation Temp: **0° to +60°C**
Storage Temp: **-40° to +85°C**

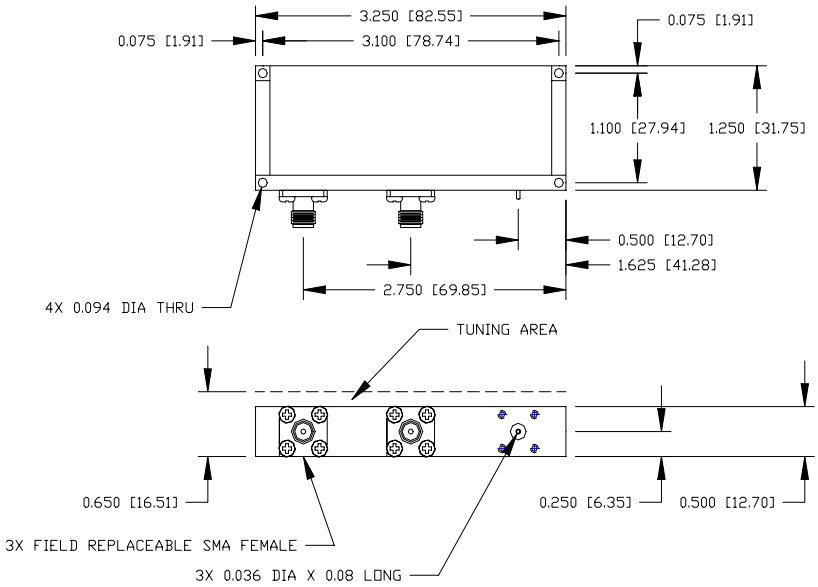

Commercial Microwave Technology, Inc.
11335 Sunrise Gold Circle, Suite B, Rancho Cordova, CA 95742
Phone: 916-631-4363 • Fax: 916-631-4364
www.cmtfilters.com