KXF SERIES

105℃ 20mm Height, Snap-in Terminal Type



◆FEATURES

- Load Life : 105℃ 3000 hours, with 20mm height.
- RoHS compliance.

◆SPECIFICATIONS

Items	Characteristics	
Category Temperature Range	−40～+105℃	−25～+105℃
Rated Voltage Range	10～100Vdc	160～450Vdc
Capacitance Tolerance	±20%(20℃,120Hz)	
Leakage Current(MAX)	I=3 $\sqrt{CV}$ (After 5 minutes application of rated voltage) I=Leakage Current(μA) C=Capacitance(μF) V=Rated Voltage(Vdc)	
(tanδ) Dissipation Factor(MAX)	(20℃,120Hz)	
Endurance	After applying rated voltage with rated ripple current for 3000 hours at 105℃, the capacitors shall meet the following requirements.	
Low Temperature Stability Impedance Ratio(MAX)	(120Hz)	

Dissipation Factor(MAX):

Rated Voltage (Vdc)	10	16	25	35	50	63	80	100	160～450
tanδ	0.55	0.50	0.45	0.40	0.35	0.30	0.25	0.20	0.20

Endurance:

Capacitance Change	Within ±20% of the initial value.
Dissipation Factor	Not more than 200% of the specified value.
Leakage Current	Not more than the specified value.

Low Temperature Stability Impedance Ratio(MAX):

Rated Voltage (Vdc)	10～100	160～250	315～450
Z(−25℃)/Z(20℃)	3	3	8
Z(−40℃)/Z(20℃)	12	−	−

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency(Hz)		60(50)	120(100)	300	500	1k	10k≦
Coefficient	10～100Vdc	0.90	1.00	1.03	1.05	1.10	1.15
	160～250Vdc	0.80	1.00	1.15	1.20	1.30	1.50
	315～450Vdc	0.80	1.00	1.15	1.20	1.25	1.40


◆OPTION

	Code
PET Sleeve without plate	EFC

◆PART NUMBER

□□□	KXF	□□□□□	M	□□□	SN	D×L
Rated Voltage	Series	Capacitance	Capacitance Tolerance	Option	Terminal Code	Case Size

◆DIMENSIONS (mm)

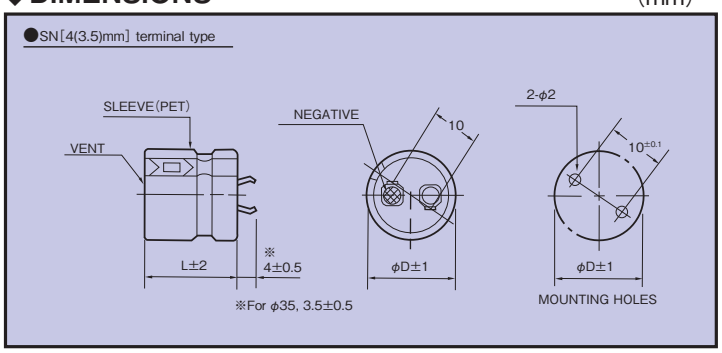

◆STANDARD SIZE

Cap(μF) \ Vdc	10	16	25	35	50	63	80	100
330								20×20 0.60
390								20×20 0.71
470							20×20 0.65	22×20 0.78
560							20×20 0.70	25×20 0.95
680						20×20 0.83	22×20 0.84	25×20 1.09
820						22×20 0.99	25×20 1.04	30×20 1.32
1000					20×20 0.87	22×20 1.10	25×20 1.19	
1200					22×20 1.02	25×20 1.20	30×20 1.44	
1500				20×20 0.80	25×20 1.15	30×20 1.47		
1800				22×20 0.94	25×20 1.34	30×20 1.52		
2200			20×20 0.98	22×20 1.04	30×20 1.60			
2700			22×20 1.08	25×20 1.29				
3300		20×20 1.06	22×20 1.29	30×20 1.45				
3900		20×20 1.25	25×20 1.58					
4700	20×20 0.98	22×20 1.38	25×20 1.61					
5600	20×20 1.16	25×20 1.68						
6800	22×20 1.31	25×20 1.80						
8200	25×20 1.59							
10000	25×20 1.77							

Cap(μF) \ Vdc	160	180	200	220	250	315	350	385
39								20×20 0.35
47							20×20 0.38	20×20 0.38
56						20×20 0.41	20×20 0.40	22×20 0.42
68						22×20 0.48	22×20 0.45	25×20 0.50
82						22×20 0.51	25×20 0.54	25×20 0.52
100						25×20 0.57	25×20 0.57	30×20 0.61
120					20×20 0.65	30×20 0.65	30×20 0.65	30×20 0.64
150				20×20 0.70	22×20 0.74	30×20 0.70	35×20 0.78	35×20 0.80
180		20×20 0.80	20×20 0.80	22×20 0.80	22×20 0.77	35×20 0.85	35×20 0.85	
220	20×20 0.81	22×20 0.90	22×20 0.87	25×20 0.85	25×20 0.95	35×20 0.90		
270	22×20 0.98	22×20 0.95	25×20 0.95	25×20 1.02	30×20 1.00			
330	25×20 1.02	25×20 1.15	25×20 1.15	30×20 1.12	30×20 1.16			
390	25×20 1.25	25×20 1.20	30×20 1.20	30×20 1.25	35×20 1.25			
470	30×20 1.30	30×20 1.36	30×20 1.41	35×20 1.45				
560	30×20 1.46	30×20 1.43	35×20 1.43					
680	35×20 1.51	35×20 1.51						
820	35×20 1.55							

Cap(μF) \ Vdc	400	420	450
39			20×20 0.36
47	20×20 0.39	20×20 0.38	20×20 0.41
56	20×20 0.40	22×20 0.45	22×20 0.43
68	22×20 0.49	22×20 0.48	25×20 0.50
82	25×20 0.55	25×20 0.53	25×20 0.53
100	25×20 0.60	30×20 0.58	30×20 0.61
120	30×20 0.75	30×20 0.70	30×20 0.70
150	30×20 0.80	35×20 0.80	35×20 0.80
180	35×20 0.85		

Ripple Current (A r.m.s./120Hz, 105℃)

Case Size φD×L(mm)