
SunLED
www.SunLED.com

Part Number: **LUY13D**

2mm FLAT TOP LED LAMP

Features

- MOUNTS FLUSH WITH PANEL.
- LOW POWER CONSUMPTION.
- SUITABLE FOR AUDIO PANEL INDICATOR.
- FITS 2mm HOLE IN PANEL UP TO 3.5mm (.138").
- LONG LIFE - SOLID STATE RELIABILITY.
- RoHS COMPLIANT.

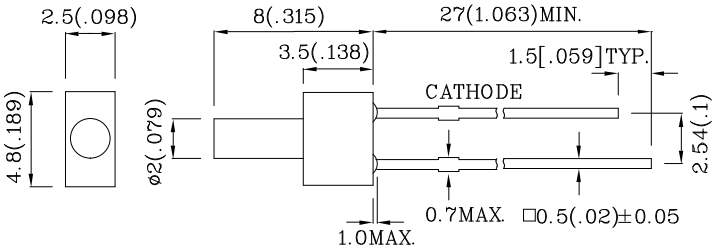


Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is ± 0.25(0.01") unless otherwise noted.
3.Specifications are subject to change without notice.

Absolute Maximum Ratings (T_A=25°C)		**UY (GaAsP/GaP)**	**Unit**
Reverse Voltage	V_R	5	V
Forward Current	I_F	30	mA
Forward Current (Peak) 1/10 Duty Cycle 0.1ms Pulse Width	i_{FS}	140	mA
Power Dissipation	P_T	75	mW
Operating Temperature	T_A	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +85	
Lead Solder Temperature [2mm Below Package Base]	260°C For 3 Seconds		
Lead Solder Temperature [5mm Below Package Base]	260°C For 5 Seconds		


Operating Characteristics (T_A=25°C)		**UY (GaAsP/GaP)**	**Unit**
Forward Voltage (Typ.) (I_F=10mA)	V_F	1.95	V
Forward Voltage (Max.) (I_F=10mA)	V_F	2.5	V
Reverse Current (Max.) (V_R=5V)	I_R	10	uA
Wavelength of Peak Emission (Typ.) (I_F=10mA)	λ P	590	nm
Wavelength of Dominant Emission (Typ.) (I_F=10mA)	λ D	588	nm
Spectral Line Full Width At Half-Maximum (Typ.) (I_F=10mA)	Δλ	35	nm
Capacitance (Typ.) (V_F=0V, f=1MHz)	C	20	pF

Part Number	Emitting Color	Emitting Material	Lens-color	Luminous Intensity (IF=10mA) mcd		Wavelength nm λ P	Viewing Angle 2 θ 1/2
				min.	typ.		
LUY13D	Yellow	GaAsP/GaP	Yellow Diffused	3	7	590	70°

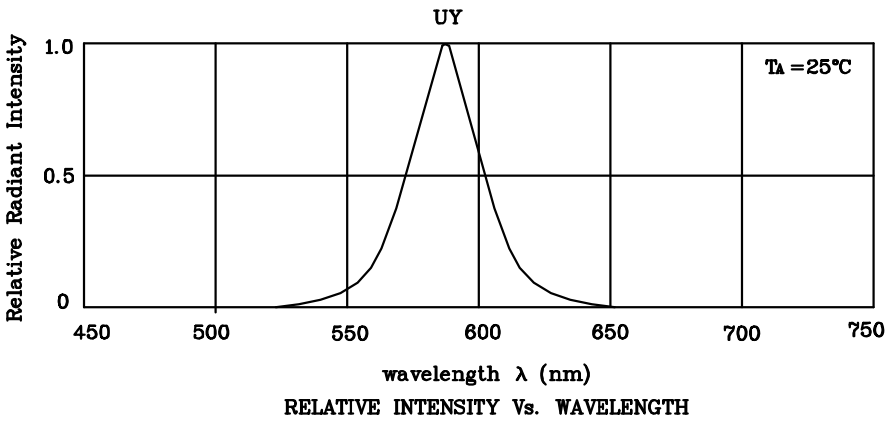


RELATIVE INTENSITY Vs. WAVELENGTH


❖ **UY**




FORWARD CURRENT Vs.
FORWARD VOLTAGE




LUMINOUS INTENSITY Vs.
FORWARD CURRENT



FORWARD CURRENT
DERATING CURVE

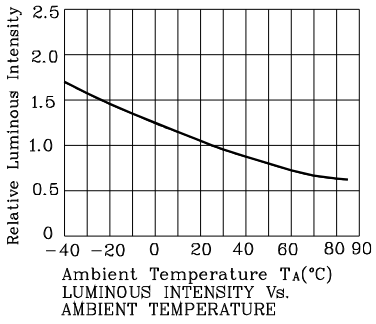


LUMINOUS INTENSITY Vs.
AMBIENT TEMPERATURE



SPATIAL DISTRIBUTION

Wave Soldering Profile For Lead-free Through-hole LED.

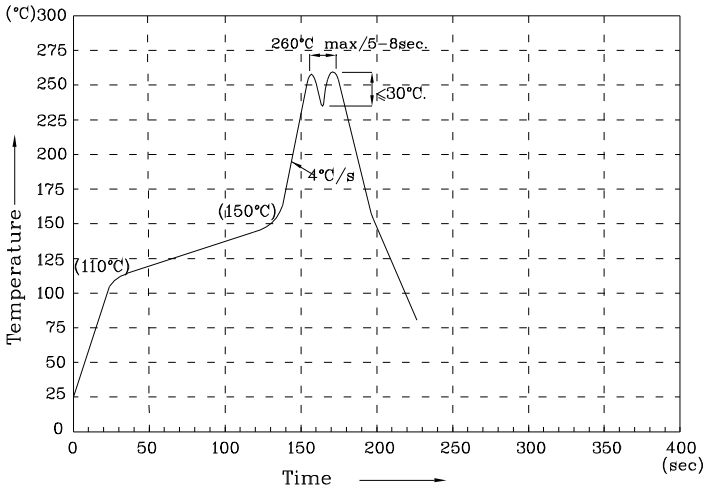

NOTES:

1. Recommend the wave temperature 245℃~260℃. The maximum soldering temperature should be less than 260℃.
2. Do not apply stress on epoxy resins when temperature is over 85 degree℃.
3. The soldering profile apply to the lead free soldering (Sn/Cu/Ag alloy).
4. No more than once.

Remarks:

If special sorting is required (e.g. binning based on forward voltage, luminous intensity / luminous flux or wavelength),

the typical accuracy of the sorting process is as follows:

1. Wavelength: +/-1nm

2. Luminous Intensity / Luminous Flux: +/-15%

3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.

PACKING & LABEL SPECIFICATIONS LUY13D

