


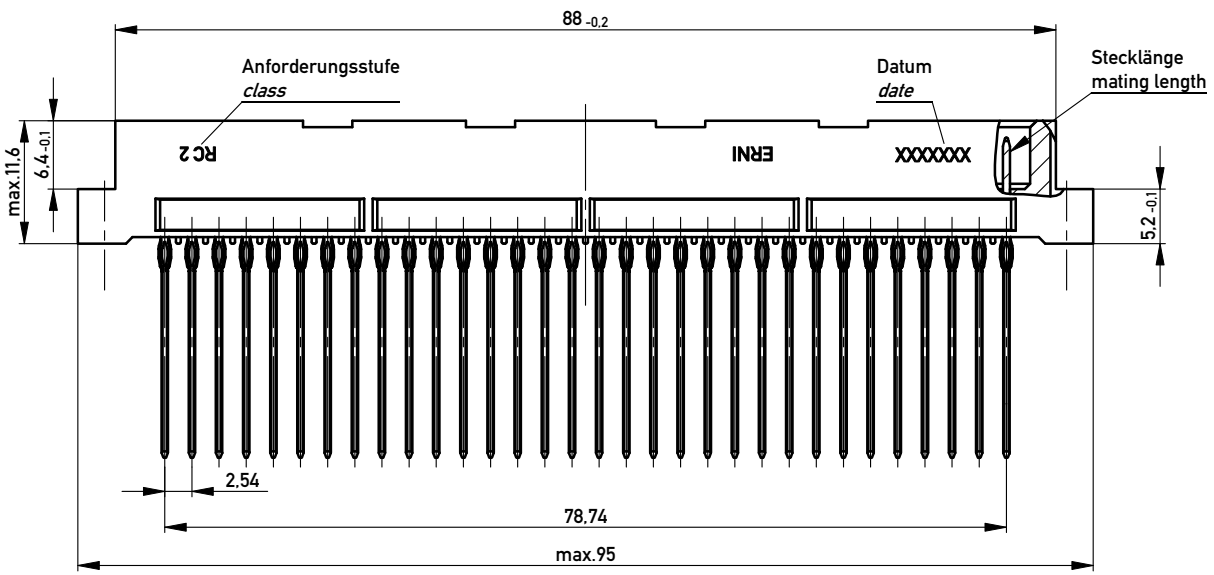


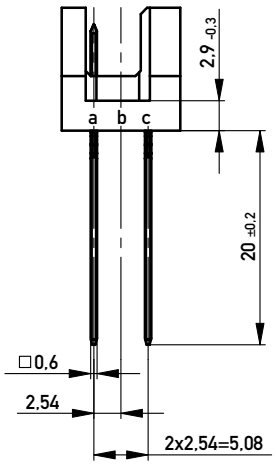


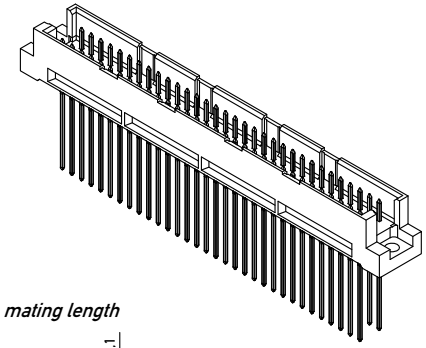

Stecklänge / *mating length*




E = *early mate, late break* / voreilend
S = standard
L = *late mate, early break* / nacheilend

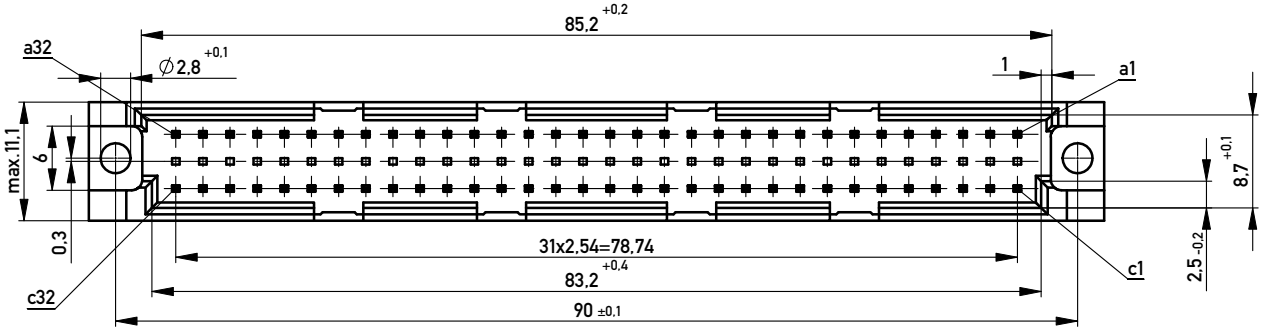


Elastische Einpresszone / *compliant pressfit zone*
Isolierwerkstoff */ housing material : PBT GF 30*
Bauart 4 / t*ype 4*
Anforderungsstufe 2 = 400 Steckzyklen */ performance class 2 = 400 mating cycles*
Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2
Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2
Schichtaufbau im metallisierten Loch siehe Zeichnung 114124
diameter of drilled hole see drawing 114124
1) ∅1,0 $^{+0,09}_{-0,06}$ Durchmesser des metallisierten Loches
∅ *1,0* $^{+0,09}_{-0,06}$ *Diameter of finished plated-through hole*

Bedruckung siehe Zeichnung 294905
Marking see drawing 294905

Bestückungsplan / *contact layout*

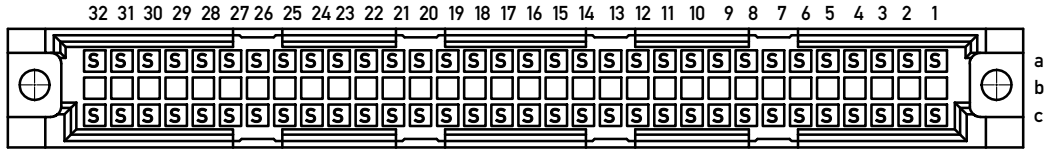

Leiterplatten-Lochbild / *PCB drillhole pattern*

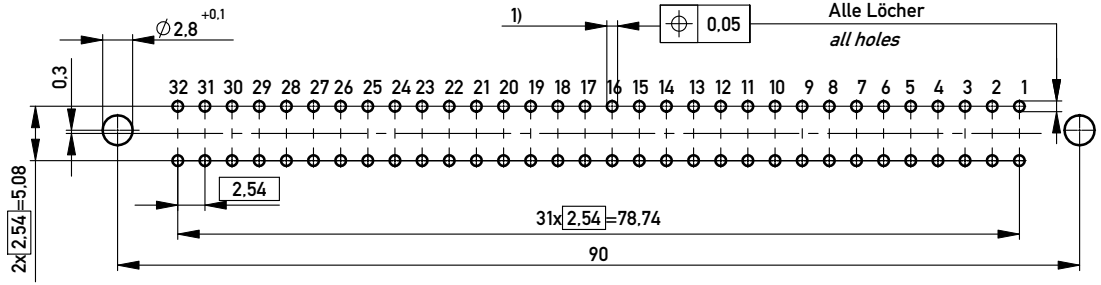

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

Information:	Tolerances	All Dimensions in mm	Scale 2:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.		Designation: Messerleiste R 64 EE / *Male Connector R 64 Pressfit*
B / Index	16.02.2010 / Date	ERNI www.ERNI.com	354395 — I — A3
			Class STVR