

SILICON EPITAXIAL SWITCHING DIODE

BAS216WS

SOD-323

PLASTIC PCAKAGE



Marking

BAS216WS=W2 with cathode band

ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

DESCRIPTION	SYMBOL	VALUE	UNIT
Repetitive Peak Reverse Voltage	V_{RRM}	85	V
Reverse Voltage	V_R	75	V
Continuous Forward Current	I_F	250	mA
Repetitive Peak Forward Current	I_{FRM}	500	mA
Non Repetitive Peak Forward Surge Current	I_{FSM}		
at t=1s		0.5	A
at t=1ms		1.0	A
at t=1ms		4.0	A
Power Dissipation	P_{tot}	200	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 65 to +150	$^\circ\text{C}$


ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless specified otherwise)

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	MAX	UNIT
Forward Voltage	V_F	$I_F=1\text{mA}$		0.715	V
		$I_F=10\text{mA}$		0.855	V
		$I_F=50\text{mA}$		1.0	V
		$I_F=150\text{mA}$		1.25	V
Reverse Current	I_R	$V_R=25\text{V}$		30	nA
		$V_R=75\text{V}$		1.0	μA
		$V_R=25\text{V}, T_j=150^\circ\text{C}$		30	μA
		$V_R=75\text{V}, T_j=150^\circ\text{C}$		50	μA

DYNAMIC CHARACTERISTICS

Diode Capacitance	C_{tot}	$V_R=0\text{V}, f=1\text{MHz}$		1.5	pF
Reverse Recovery Time	t_{rr}	$I_F=10\text{mA}$, to $I_R=10\text{mA}$ $R_L=100\ \Omega$ Measured at $I_R=1\text{mA}$		4.0	ns

PACKAGE SOD-323 FL

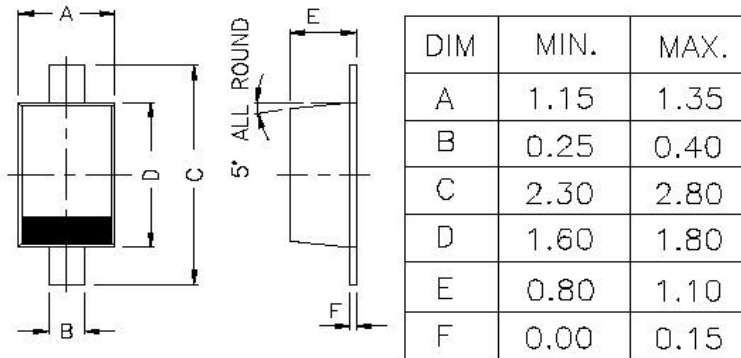

All dimensions are in mm

CATHODE IS MARKED BY BAND

Component Disposal Instructions

1. CDIL Semiconductor Devices are RoHS compliant, customers are requested to please dispose as per prevailing Environmental Legislation of their Country.
2. In Europe, please dispose as per EU Directive 2002/96/EC on Waste Electrical and Electronic Equipment (WEEE).

Disclaimer

The product information and the selection guides facilitate selection of the CDIL's Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished in the Data Sheet and on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of
Continental Device India Limited

C-120 Naraina Industrial Area, New Delhi 110 028, India.

Telephone + 91-11-2579 6150, 4141 1112 Fax + 91-11-2579 5290, 4141 1119
email@cdil.com www.cdilsemi.com