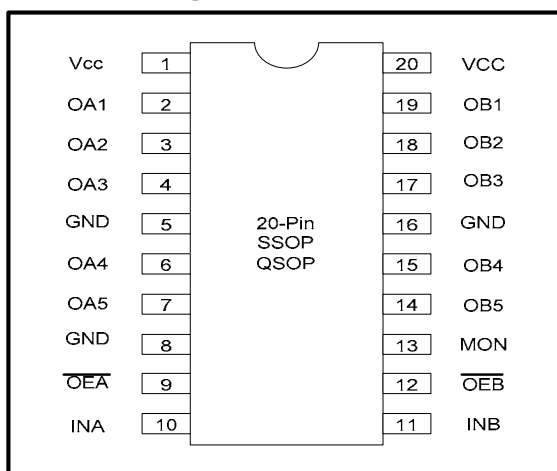
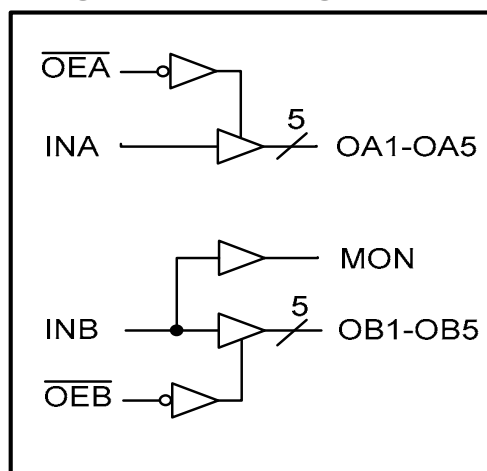


**800MHz TTL/CMOS Potato Chip**

FEATURES:	DESCRIPTION:
- Patented technology - Operating frequency up to 800MHz with 2pf load - Operating frequency up to 600MHz with 5pf load - Operating frequency up to 300MHz with 15pf load - Operating frequency up to 100MHz with 50pf load - Very low output pin to pin skew < 80ps - Very low pulse skew < 300ps - VCC = 1.2V to 3.6V - Propagation delay < 2.4ns max with 15pf load - Low input capacitance: 3pf typical - Dual 1:5 fanout - Available in 20pin 300mil wide SOIC package - Available in 20pin 150mil wide QSOP package - Available in 20pin 209mil wide SSOP package	Potato Semiconductor's PO49FCT3805B is designed for world top performance using submicron CMOS technology to achieve 800MHz TTL output frequency with less than 80ps output pin to pin skew. PO49FCT3805B is a 1.2V to 3.6V CMOS Dual 1 input to 5 outputs Buffered driver to achieve 800MHz output frequency. Typical applications are clock and signal distribution. Inputs can be driven from either 3.3V or 5V devices. This feature allows the use of these devices as translators in a mixed 3.3V/5V system environment.

Pin Configuration**Logic Block Diagram****Pin Description**

Pin Name	Description
INA, INB	Signal or clock Inputs
$\overline{OEA}$, $\overline{OEB}$	Hi-Z State Output Enable Inputs (Active LOW)
OAn, OBn	Signal or clock Outputs
MON	Monitor Output
Vcc, GND	Power, Ground

Inputs		Outputs	
$\overline{OEA}$, $\overline{OEB}$	INA, INB	OAn, OBn	MON
L	L	L	L
L	H	H	H
H	L	Z	L
H	H	Z	H

**800MHz TTL/CMOS Potato Chip****Maximum Ratings**

Description	Max	Unit
Storage Temperature	-65 to 150	°C
Operation Temperature	-40 to 85	°C
Operation Voltage	-0.5 to +4.6	V
Input Voltage	-0.5 to +5.5	V
Output Voltage	-0.5 to Vcc+0.5	V

Note:

stresses greater than listed under Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability specification is not implied.

DC Electrical Characteristics

Symbol	Description	Test Conditions	Min	Typ	Max	Unit
VOH	Output High voltage	Vcc=3V Vin=VIH or VIL, IOH= -12mA	2.4	3	-	V
VOL	Output Low voltage	Vcc=3V Vin=VIH or VIL, IOH=12mA	-	0.3	0.5	V
VIH	Input High voltage	Guaranteed Logic HIGH Level (Input Pin)	2	-	+5.5	V
VIL	Input Low voltage	Guaranteed Logic LOW Level (Input Pin)	-0.5	-	0.8	V
IiH	Input High current	Vcc = 3.6V and Vin = 5.5V	-	-	50	uA
IOZH	High Impedance Output current	Vcc = 3.6V and Vo = Vcc	-	-	1	uA
IOZL	High Impedance Output current	Vcc = 3.6V and Vo = 0V	-	-	-1	uA
IiL	Input Low current	Vcc = 3.6V and Vin = 0V	-	-	-50	uA
VIK	Clamp diode voltage	Vcc = Min. And IIN = -18mA	-	-0.7	-1.2	V

Notes:

1. For conditions shown as Max. or Min., use appropriate value specified under Electrical Characteristics for the applicable device type.
2. Typical values are at Vcc = 3.3V, 25 °C ambient.
3. This parameter is guaranteed but not tested.
4. Not more than one output should be shorted at one time. Duration of the test should not exceed one second.
5. VoH = Vcc – 0.6V at rated current

**800MHz TTL/CMOS Potato Chip****Power Supply Characteristics**

Symbol	Description	Test Conditions (1)	Min	Typ	Max	Unit
Iccq	Quiescent Power Supply Current	Vcc=Max, Vin=Vcc or GND	-	0.1	30	uA

Notes:

- For conditions shown as Max. or Min., use appropriate value specified under Electrical Characteristics for the applicable device type.
- Typical values are at Vcc = 3.3V, 25°C ambient.
- This parameter is guaranteed but not tested.
- Not more than one output should be shorted at one time. Duration of the test should not exceed one second.

Capacitance (TA= +25°C, f= 1MHz)

Parameters (1)	Description	Test Conditions	Typ	Max	Unit
Cin	Input Capacitance	Vin = 0V	3	4	pF
Cout	Output Capacitance	Vout = 0V	-	6	pF

Notes:

- This parameter is determined by device characterization but not production tested.

Switching Characteristics

Symbol	Description	Test Conditions (1)	Max	Unit
tPLH & tPHL	Propagation Delay INA to OAn, INB to OBn	CL = 15pF	2.4	ns
tpZH or tpZL	Output Enable Time	CL = 15pF	2.5	ns
tpHZ or tPLZ	Output Disable Time	CL = 15pF	2.5	ns
tr/tf	Rise/Fall Time	0.8V – 2.0V	0.8	ns
tsk(p)	Pulse Skew (Same Package)	CL = 15pF, 125MHz	300	ps
tsk(o)	Output Pin to Pin Skew (Same Package)	CL = 15pF, 125MHz	80	ps
tsk(pp)	Output Skew (Different Package)	CL = 15pF, 125MHz	400	ps
fmax	Input Frequency	CL = 50pF	100	MHz
fmax	Input Frequency	CL = 15pF	300	MHz
fmax	Input Frequency	CL = 5pF	600	MHz
fmax	Input Frequency	CL = 2pF	800	MHz


Notes:

- See test circuits and waveforms.
- tpLH, tPHL, tsk(p), and tsk(o) are production tested. All other parameters guaranteed but not production tested.
- Airflow of 1m/s is recommended for frequencies above 133MHz







800MHz TTL/CMOS Potato Chip


Test Waveforms

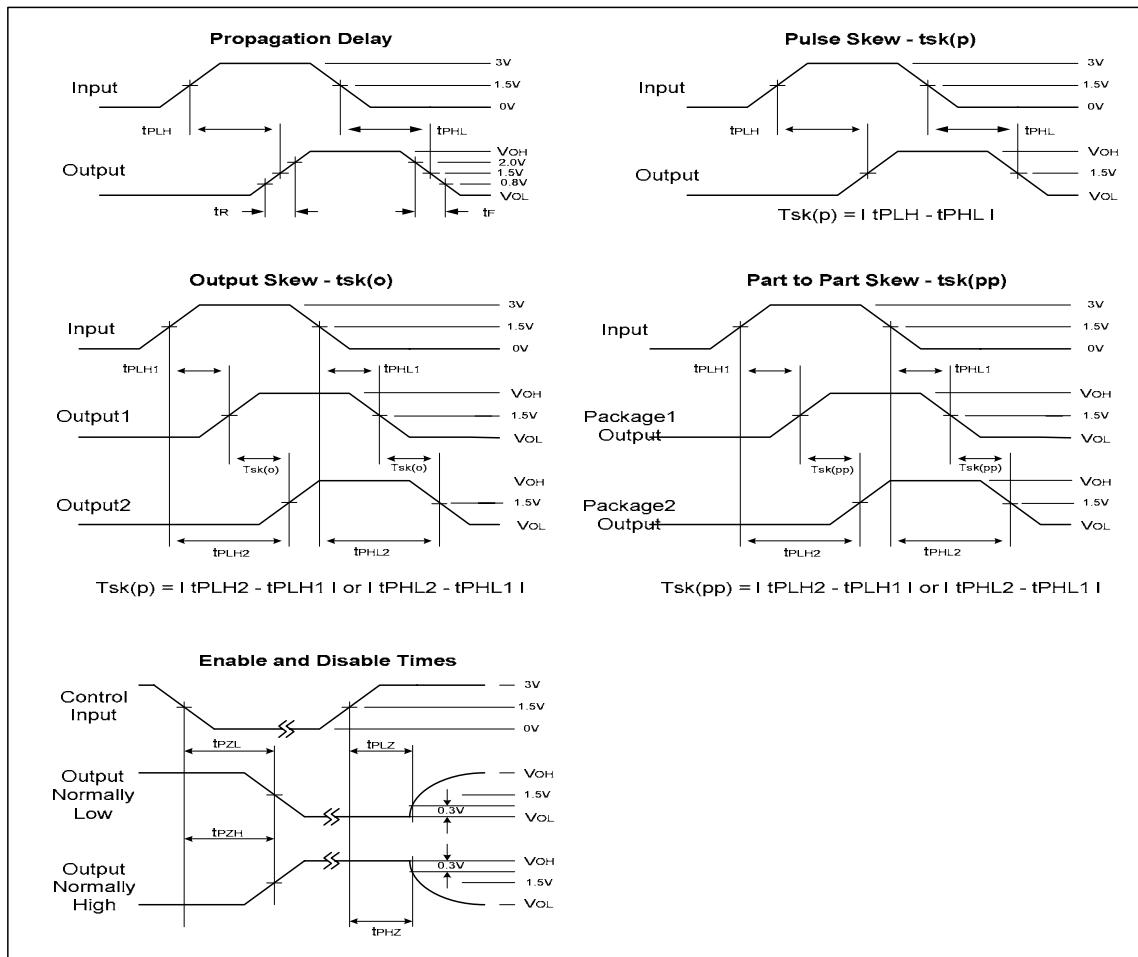

Test Circuit

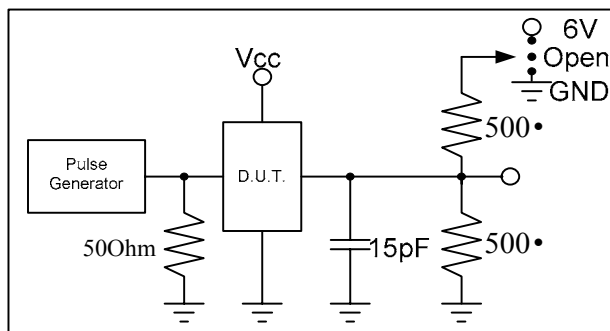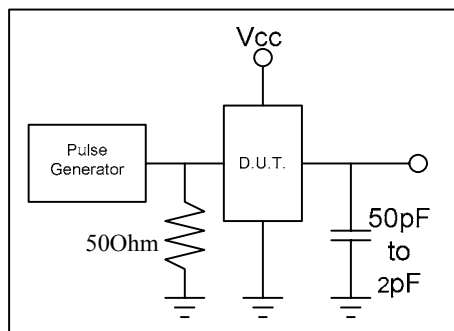

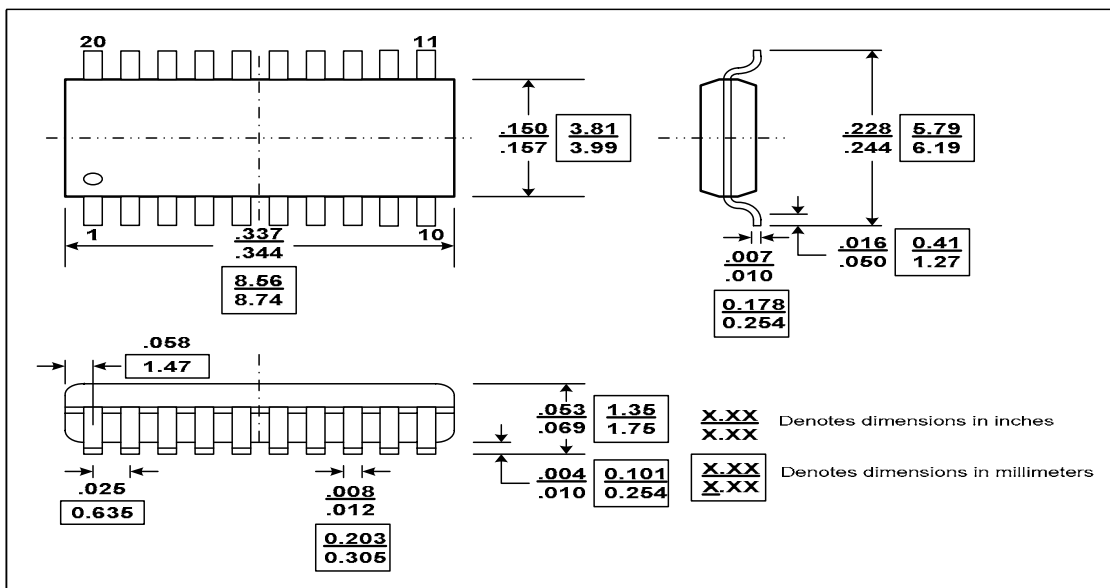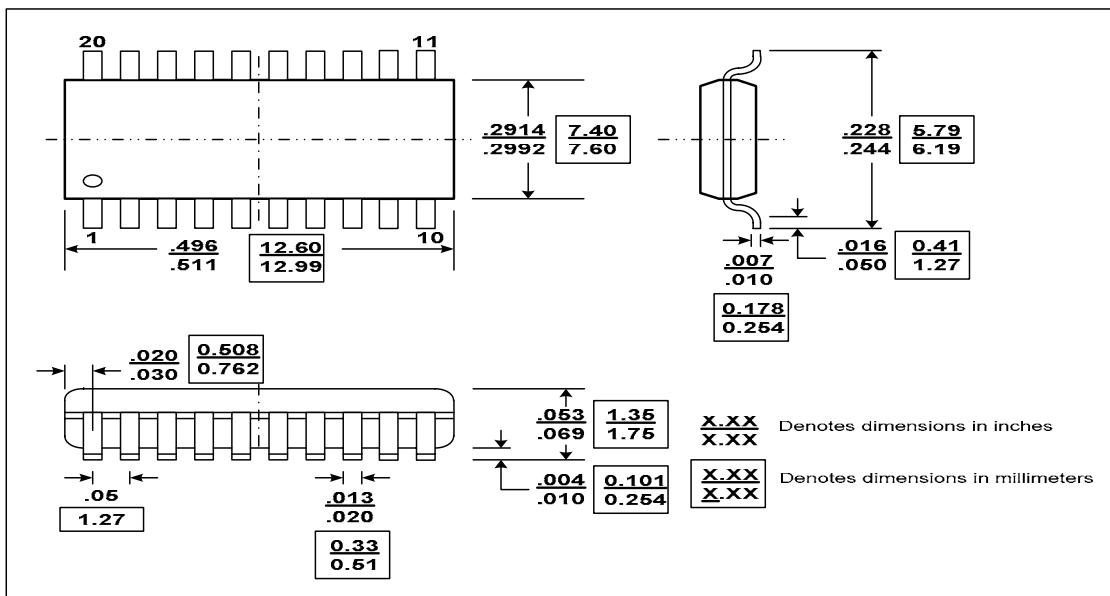**800MHz TTL/CMOS Potato Chip****Packaging Mechanical Drawing: 20 pin QSOP****Packaging Mechanical Drawing: 20 pin SOIC**

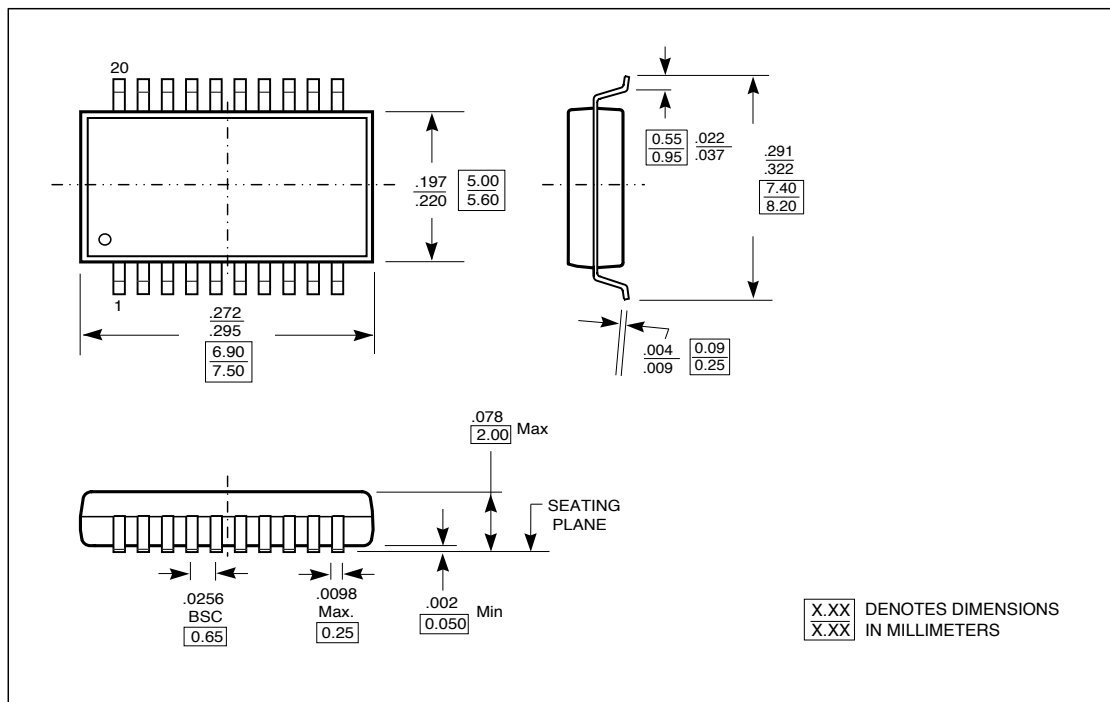**800MHz TTL/CMOS Potato Chip****Packaging Mechanical Drawing: 20 pin SSOP****IC Ordering Information**

Ordering Code	Package		Top-Marking	T _A
PO49FCT3805BCU for Tube	20pin 300mil SOIC	Pb-free & Green	PO49FCT3805BC	-40°C to 85°C
PO49FCT3805BCR for Tape & Reel	20pin 300mil SOIC	Pb-free & Green	PO49FCT3805BC	-40°C to 85°C
PO49FCT3805BQU for Tube	20pin 150mil QSOP	Pb-free & Green	PO49FCT3805BQ	-40°C to 85°C
PO49FCT3805BQR for Tape & Reel	20pin 150mil QSOP	Pb-free & Green	PO49FCT3805BQ	-40°C to 85°C
PO49FCT3805BSSU for Tube	20pin 209mil SSOP	Pb-free & Green	PO49FCT3805BSS	-40°C to 85°C
PO49FCT3805BSSR for Tape & Reel	20pin 209mil SSOP	Pb-free & Green	PO49FCT3805BSS	-40°C to 85°C

IC Package Information

PACKAGE CODE	PACKAGE TYPE	TAPE WIDTH (mm)	TAPE PITCH (mm)	TAPE & REEL PIN 1 LOCATION	TAPE TRAILER LENGTH	QTY PER TAPE	TAPE LEADER LENGTH	QTY PER TUBE
C	20pin 300mil SOIC	24	12	Top Left Corner	26 (12")	1000	43 (20")	38
Q	20pin 150mil QSOP	16	8	Top Left Corner	39 (12")	3000	64 (20")	55
SS	20pin 209mil SSOP	16	12	Top Left Corner	26 (12")	2000	43 (20")	66