





REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 08/01/16'	~	

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - VOLTAGE RATING:125V.
 - CURRENT RATING:1.5A.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+85°C.
- MATERIALS
 - CONTACT MATERIAL: COPPER ALLOY.
 - CONTACT PLATING: GOLD.
 - INSULATOR MATERIALS: PBT BLACK.
- PRODUCT NUMBER CODE:

DS1129-03-X X X X - X

 - Shell Type
S:W/ Shrapnel
X:W/O Shrapnel
 - Housing Materials
P:PBT
 - Contact Plating
0:Gold Flash
 - Housing Color
B:Black
 - No.Of Contacts
8:10p8c
 - Connector Type
S:Socket

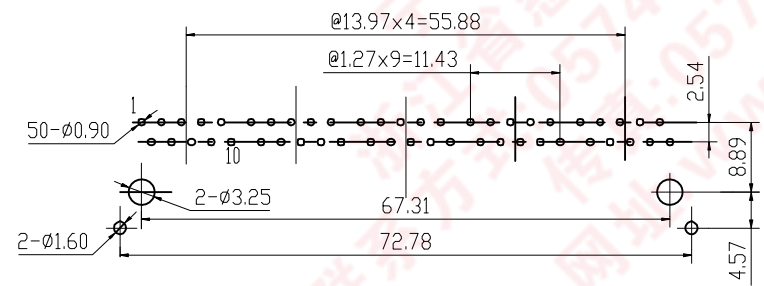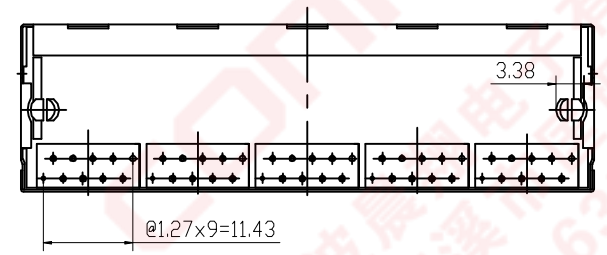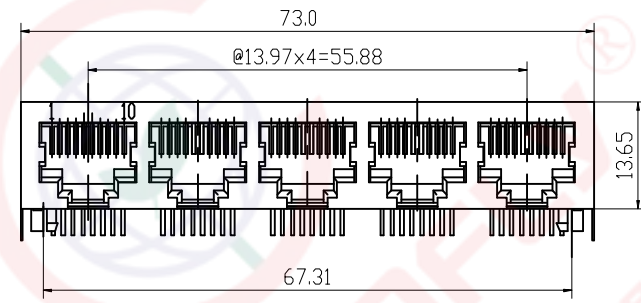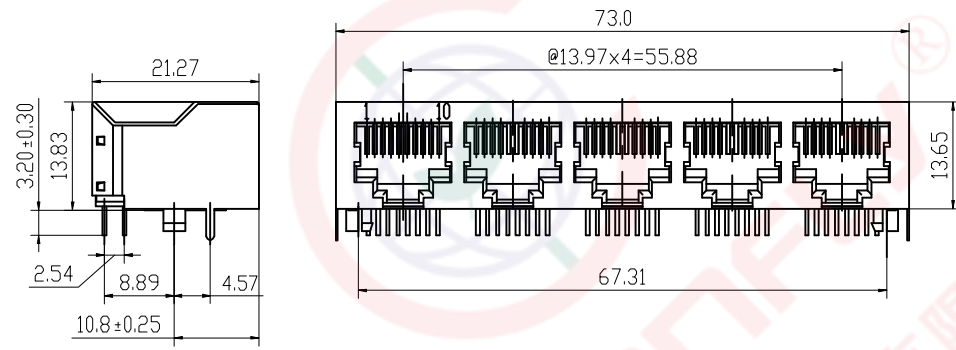

PC BOARD LAYOUT
THICKNESS=1.6mm

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PCB Jack 8 Positions 1*5
X.	±0.60	X.	±5°	UNITS	mm	Port W/ Shell 4.57mm Type	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1129-06 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		C-DS1129-06-XXXXX-X-A					