Document Title

128Kx8 bit Super Low Power and Low Voltage CMOS Static RAM

Revision History

Revision No.	History	Draft Data	Remark
0.0	Initial Draft	November 27, 2001	Preliminary
0.1	Revise - Changed Package Type : 48(36)-TBGA-6.00x7.00 to 32-TSOP1-0813.4F	December 13, 2001	Preliminary
1.0	Finalize	June 12, 2002	Final

The attached datasheets are provided by SAMSUNG Electronics. SAMSUNG Electronics CO., LTD. reserves the right to change the specifications and products. SAMSUNG Electronics will answer to your questions. If you have any questions, please contact the SAMSUNG branch offices.

128Kx8 bit Super Low Power and Low Voltage CMOS Static RAM

FEATURES

- Process Technology: Full CMOS
- Organization: 128K x8 bit
- Power Supply Voltage: 3.0~3.6V
- Low Data Retention Voltage: 1.5V(Min)
- Three State Outputs
- Package Type: 32-TSOP1-0813.4F

GENERAL DESCRIPTION


The K6F1008V2C families are fabricated by SAMSUNG′s advanced full CMOS process technology. The families support industrial temperature range and have various package types for user flexibility of system design. The families also support low data retention voltage for battery back-up operation with low data retention current.

PRODUCT FAMILY

Product Family	Operating Temperature	Vcc Range	Speed	Power Dissipation		PKG Type
				Standby (I_{SB1}, Typ.)	Operating (I_{CC1}, Max)	
K6F1008V2C-F	Industrial(-40~85°C)	3.0~3.6V	55[1]/70ns	0.5μA[2]	3mA	32-TSOP1-0813.4F


1. The parameter is measured with 30pF test load.
2. Typical values are measured at V_{CC}=3.3V, T_A=25°C and not 100% tested.

PIN DESCRIPTION

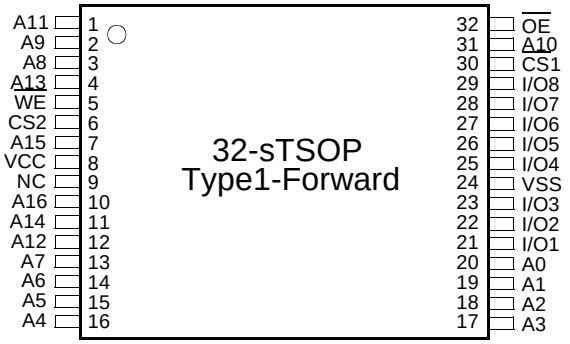

Name	Function	Name	Function
$\overline{CS_1}$, CS_2	Chip Select Inputs	I/O_1~I/O_8	Data Inputs/Outputs
$\overline{OE}$	Output Enable Input	Vcc	Power
$\overline{WE}$	Write Enable Input	Vss	Ground
A_0~A_{16}	Address Inputs	NC	No Connection

FUNCTIONAL BLOCK DIAGRAM

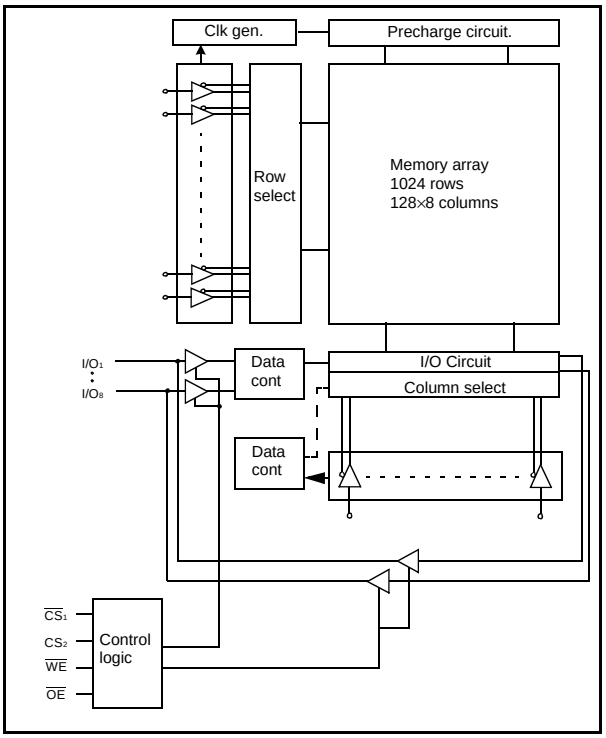

PRODUCT LIST

Industrial Temperature Products(-40~85°C)	
Part Name	**Function**
K6F1008V2C-YF55 K6F1008V2C-YF70	32-sTSOP1-F, 55ns, 3.3V 32-sTSOP1-F, 70ns, 3.3V

FUNCTIONAL DESCRIPTION

$\overline{CS_1}$	CS_2	$\overline{OE}$	$\overline{WE}$	I/O	Mode	Power
H	X[1)]	X[1)]	X[1)]	High-Z	Deselected	Standby
X[1)]	L	X[1)]	X[1)]	High-Z	Deselected	Standby
L	H	H	H	High-Z	Output Disabled	Active
L	H	L	H	Dout	Read	Active
L	H	X[1)]	L	Din	Write	Active

1. X means don't care (Must be high or low states)

ABSOLUTE MAXIMUM RATINGS[1)]

Item	Symbol	Ratings	Unit
Voltage on any pin relative to Vss	V_{IN},V_{OUT}	-0.2 to V_{CC}+0.3V	V
Voltage on Vcc supply relative to Vss	V_{CC}	-0.2 to 4.0V	V
Power Dissipation	P_D	1.0	W
Storage temperature	T_{STG}	-65 to 150	°C
Operating Temperature	T_A	-40 to 85	°C

1. Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. Functional operation should be restricted within recommended operating condition. Exposure to absolute maximum rating conditions for extended period may affect reliability.

RECOMMENDED DC OPERATING CONDITIONS[1)]

Item	Symbol	Min	Typ	Max	Unit
Supply voltage	Vcc	3.0	3.3	3.6	V
Ground	Vss	0	0	0	V
Input high voltage	V_{IH}	2.2	-	Vcc+0.3[2)]	V
Input low voltage	V_{IL}	-0.3[3)]	-	0.6	V

Note :
1. T_A=-40 to 85°C, otherwise specified
2. Overshoot: Vcc+2.0V in case of pulse width ≤20ns.
3. Undershoot: -2.0V in case of pulse width ≤20ns.
4. Overshoot and undershoot are sampled, not 100% tested.

CAPACITANCE[1)] (f=1MHz, TA=25°C)

Item	Symbol	Test Condition	Min	Max	Unit
Input capacitance	C_{IN}	V_{IN}=0V	-	8	pF
Input/Output capacitance	C_{IO}	V_{IO}=0V	-	10	pF

1. Capacitance is sampled, not 100% tested

DC AND OPERATING CHARACTERISTICS


Item	Symbol	Test Conditions	Min	Typ[1]	Max	Unit
Input leakage current	I_{LI}	V_{IN}=Vss to Vcc	-1	-	1	µA
Output leakage current	I_{LO}	$\overline{CS_1}$=V_{IH} or CS_2=V_{IL} or $\overline{OE}$=V_{IH} or $\overline{WE}$=V_{IL}, V_{IO}=Vss to Vcc	-1	-	1	µA
Average operating current	I_{CC1}	Cycle time=1µs, 100%duty, I_{IO}=0mA, $\overline{CS_1}$≤0.2V, CS_2≥Vcc-0.2V, V_{IN}≤0.2V or V_{IN}≥V_{CC}-0.2V	-	-	3	mA
	I_{CC2}	Cycle time=Min, 100% duty, I_{IO}=0mA, $\overline{CS_1}$=V_{IL}, CS_2=V_{IH}, V_{IN}=V_{IH} or V_{IL}	-	-	35	mA
Output low voltage	V_{OL}	I_{OL}=2.1mA	-	-	0.4	V
Output high voltage	V_{OH}	I_{OH}=-1.0mA	2.4	-	-	V
Standby Current(CMOS)	I_{SB1}	$\overline{CS_1}$≥Vcc-0.2V, CS_2≥Vcc-0.2V or CS_2≤0.2V, Other inputs=0~Vcc	-	0.5	5[2)]	µA

1. Typical values are measured at V_{CC}=3.3V, T_A=25°C and not 100% tested.
2. Super low power product=1µA with special handling.

AC OPERATING CONDITIONS

TEST CONDITIONS(Test Load and Test Input/Output Reference)

Input pulse level: 0.4 to 2.2V
Input rising and falling time: 5ns
Input and output reference voltage: 1.5V
Output load (See right): C_L= 100pF+1TTL
C_L = 30pF+1TTL



1. Including scope and jig capacitance
2. R_1=3070Ω, R_2=3150Ω
3. V_{TM} =2.8V

AC CHARACTERISTICS (Vcc=3.0~3.6V, Industrial product:T_A=-40 to 85°C)

Parameter List		Symbol	Speed Bins				Units
			55ns[1]		70ns		
			Min	Max	Min	Max	
Read	Read Cycle Time	t_{RC}	55	-	70	-	ns
	Address Access Time	t_{AA}	-	55	-	70	ns
	Chip Select to Output	t_{CO}	-	55	-	70	ns
	Output Enable to Valid Output	t_{OE}	-	25	-	35	ns
	Chip Select to Low-Z Output	t_{LZ}	10	-	10	-	ns
	Output Enable to Low-Z Output	t_{OLZ}	5	-	5	-	ns
	Chip Disable to High-Z Output	t_{HZ}	0	20	0	25	ns
	Output Disable to High-Z Output	t_{OHZ}	0	20	0	25	ns
	Output Hold from Address Change	t_{OH}	10	-	10	-	ns
Write	Write Cycle Time	t_{WC}	55	-	70	-	ns
	Chip Select to End of Write	t_{CW}	45	-	60	-	ns
	Address Set-up Time	t_{AS}	0	-	0	-	ns
	Address Valid to End of Write	t_{AW}	45	-	60	-	ns
	Write Pulse Width	t_{WP}	40	-	50	-	ns
	Write Recovery Time	t_{WR}	0	-	0	-	ns
	Write to Output High-Z	t_{WHZ}	0	20	0	20	ns
	Data to Write Time Overlap	t_{DW}	25	-	30	-	ns
	Data Hold from Write Time	t_{DH}	0	-	0	-	ns
	End Write to Output Low-Z	t_{OW}	5	-	5	-	ns

1. The parameter is measured with 30pF test load.


DATA RETENTION CHARACTERISTICS

Item	Symbol	Test Condition	Min	Typ	Max	Unit
Vcc for data retention	V_{DR}	$\overline{CS_1}$≥Vcc-0.2V[1]	1.5	-	3.6	V
Data retention current	I_{DR}	Vcc=1.5V, $\overline{CS_1}$≥Vcc-0.2V[1]	-	-	1.0	µA
Data retention set-up time	t_{SDR}	See data retention waveform	0	-	-	ns
Recovery time	t_{RDR}		tRC	-	-	


1. $\overline{CS_1}$≥Vcc-0.2V, CS_2≥Vcc-0.2V($\overline{CS_1}$ controlled) or CS_2≤0.2V(CS_2 controlled)

TIMING DIAGRAMS

TIMING WAVEFORM OF READ CYCLE(1) (Address Controlled, $\overline{CS_1}$=$\overline{OE}$=V_{IL}, CS_2=$\overline{WE}$=V_{IH})

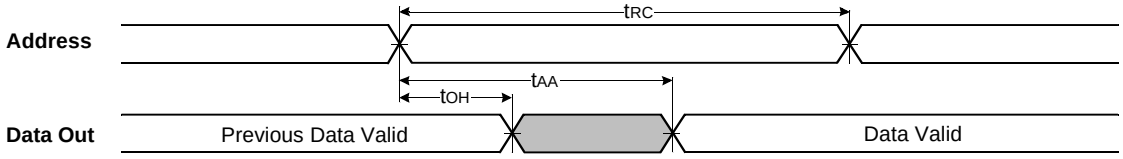


TIMING WAVEFORM OF READ CYCLE(2) ($\overline{WE}$=V_{IH})

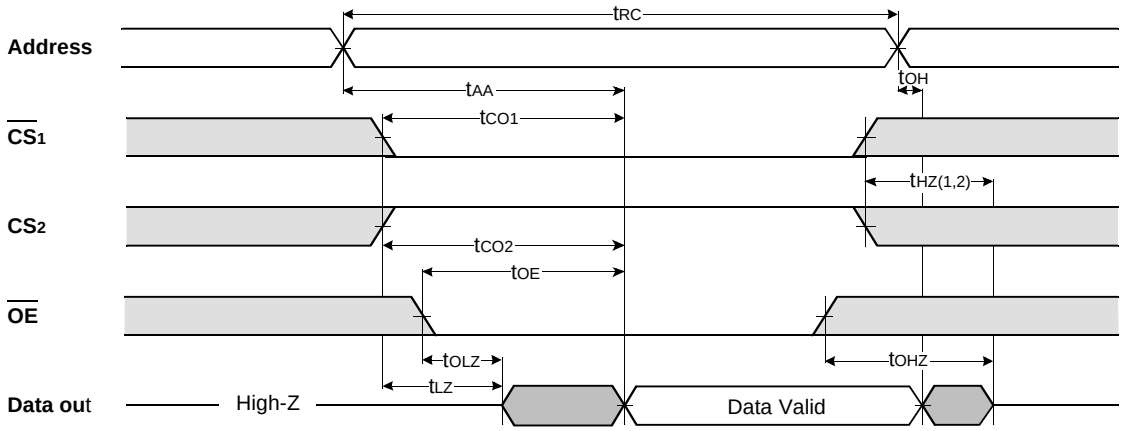


NOTES (READ CYCLE)

1. t_{HZ} and t_{OHZ} are defined as the time at which the outputs achieve the open circuit conditions and are not referenced to output voltage levels.
2. At any given temperature and voltage condition, t_{HZ}(Max.) is less than t_{LZ}(Min.) both for a given device and from device to device interconnection.


TIMING WAVEFORM OF WRITE CYCLE(1) ($\overline{WE}$ Controlled)

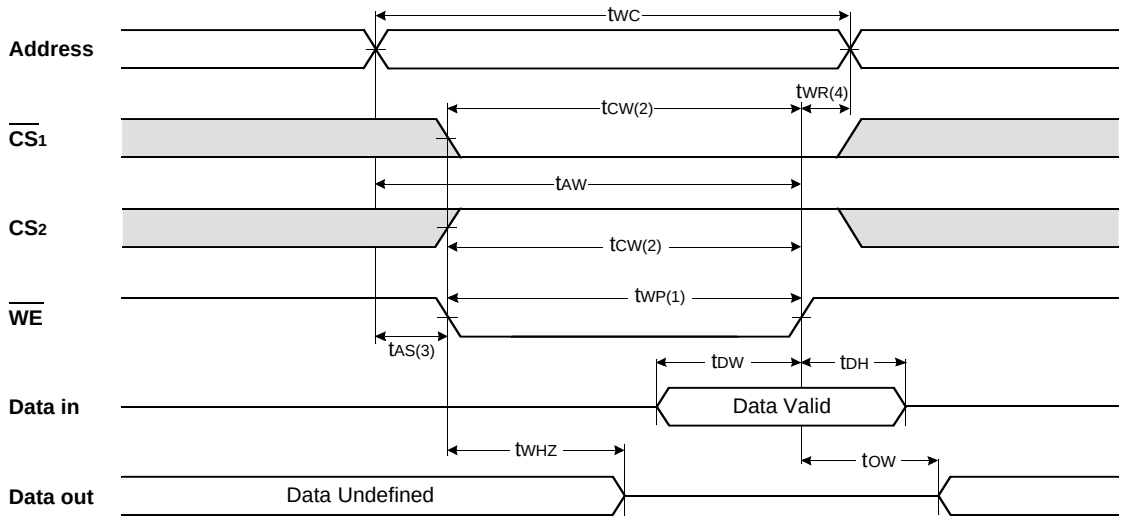

TIMING WAVEFORM OF WRITE CYCLE(2) ($\overline{CS_1}$ Controlled)

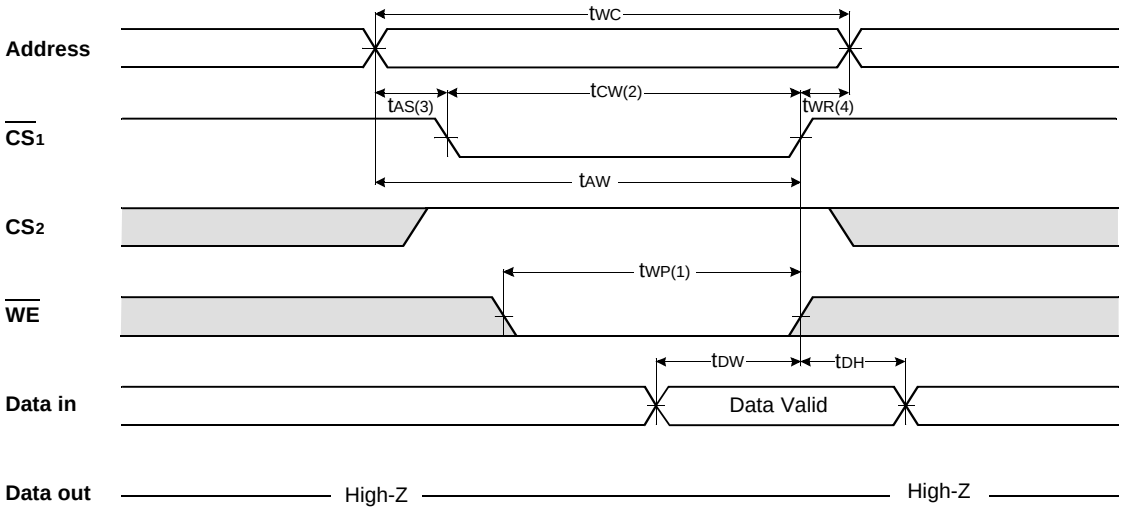

TIMING WAVEFORM OF WRITE CYCLE(3) (CS_2 Controlled)

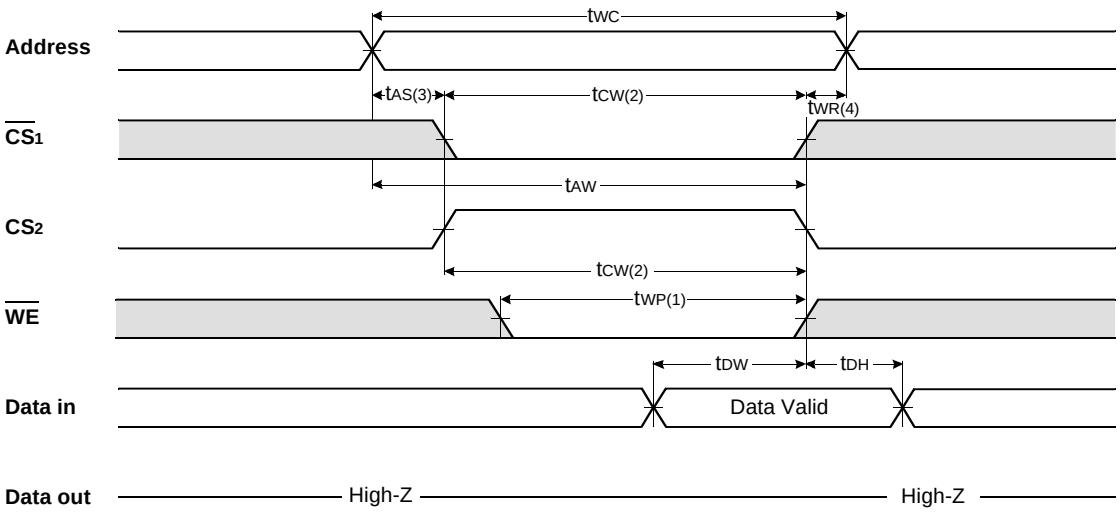


NOTES (WRITE CYCLE)


1. A write occurs during the overlap of a low $\overline{CS_1}$, a high CS_2 and a low $\overline{WE}$. A write begins at the latest transition among $\overline{CS_1}$ going low, CS_2 going high and $\overline{WE}$ going low : A write ends at the earliest transition among $\overline{CS_1}$ going high, CS_2 going low and $\overline{WE}$ going high, t_{WP} is measured from the begining of write to the end of write.
2. t_{CW} is measured from the $\overline{CS_1}$ going low or from CS_2 going high to the end of write.
3. t_{AS} is measured from the address valid to the beginning of write.
4. t_{WR} is measured from the end of write to the address change. t_{WR1} is applied in case a write ends with $\overline{CS_1}$ or $\overline{WE}$ going high and t_{WR2} is applied in case a write ends with CS_2 going low.

DATA RETENTION WAVE FORM

$\overline{CS_1}$ controlled

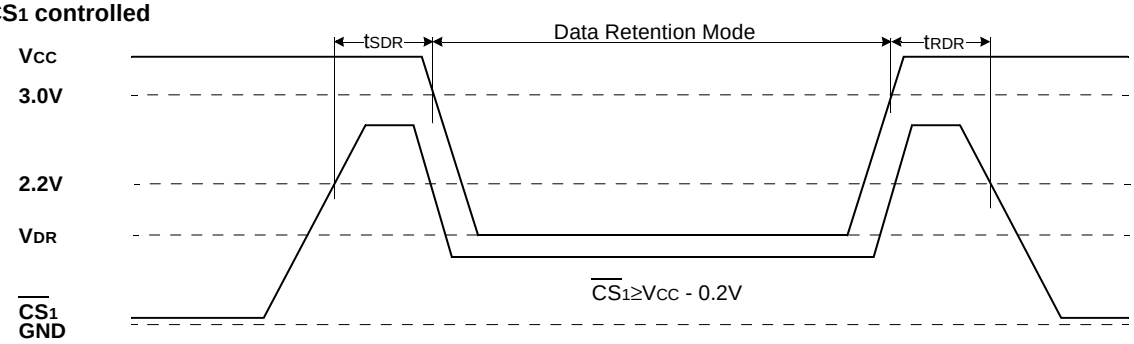

CS_2 controlled

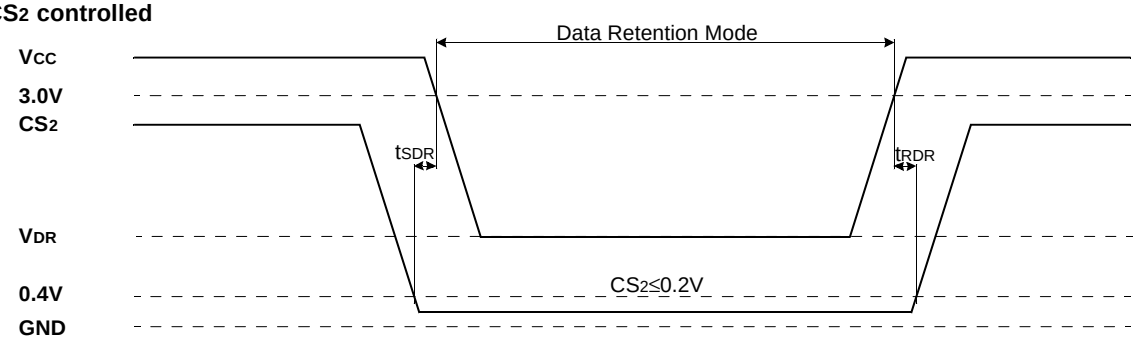

PACKAGE DIMENSIONS

Units: millimeters(inches)

32 PIN THIN SMALL OUTLINE PACKAGE TYPE I (0813.4F)

