


SHEET 1 OF 1

▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
(ON)	OFF	(ON)
1-2; 4-5	OFF	2-3; 5-6

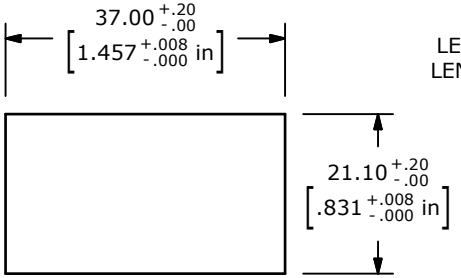



RECOMMENDED
PANEL CUT-OUT

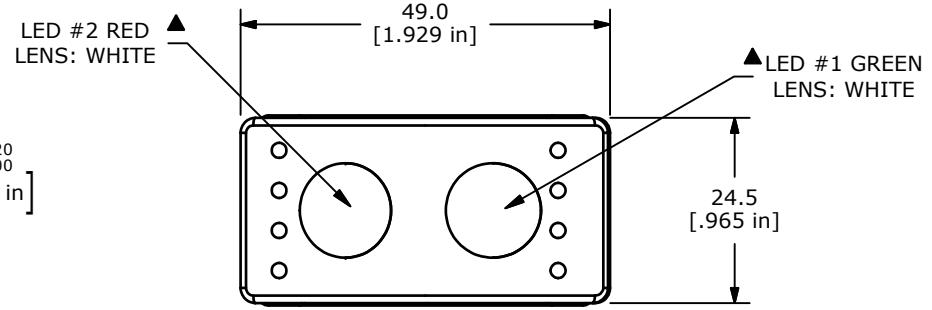



CIRCUIT: DPDT
(ON) - OFF - (ON)
( ) = MOMENTARY FUNCTION

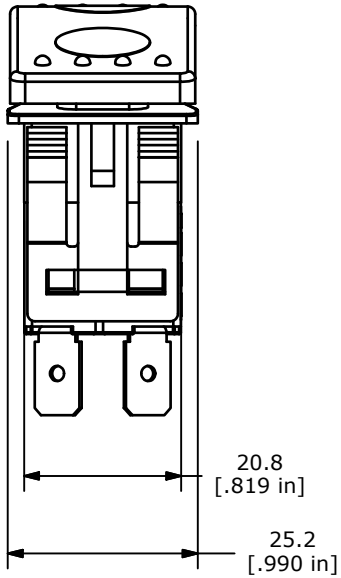

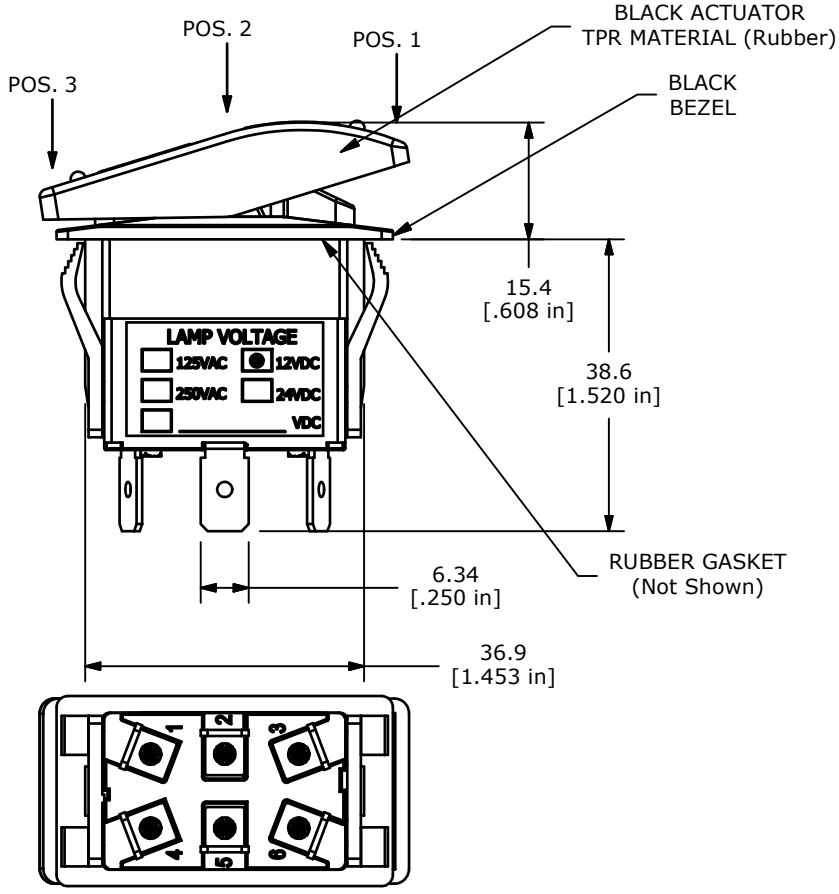

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 16A @ 30 VDC, 50/60 Hz, µT55
   UL LISTED
5. ELECTRICAL LIFE: 10,000 CYCLES
6. MECHANICAL LIFE: 30,000 CYCLES
7. CONTACT RESISTANCE: <20 MILLI-OHMS INITIAL
8. DIELECTRIC STRENGTH: >1,500V AC 1MIN
9. INSULATION RESISTANCE: >100 MOHMS @ 500VDC
10. OPERATING TEMP: 0°C to 55°C
11. LED VOLTAGE: 12VDC
12. ▲DENOTES CRITICAL PARAMETER.
13. 2002/95/EC (ROHS) COMPLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
B	21355	Drawing Cleanup	1/15/14	rc
A	21252	New Release	8/14/13	rc

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

TITLE R726FF3-SXXX2BDGRW

SCALE	DATE	DR	DWG	REV
1:1	8/14/2013	rc	C700020	B