

SHEET OF

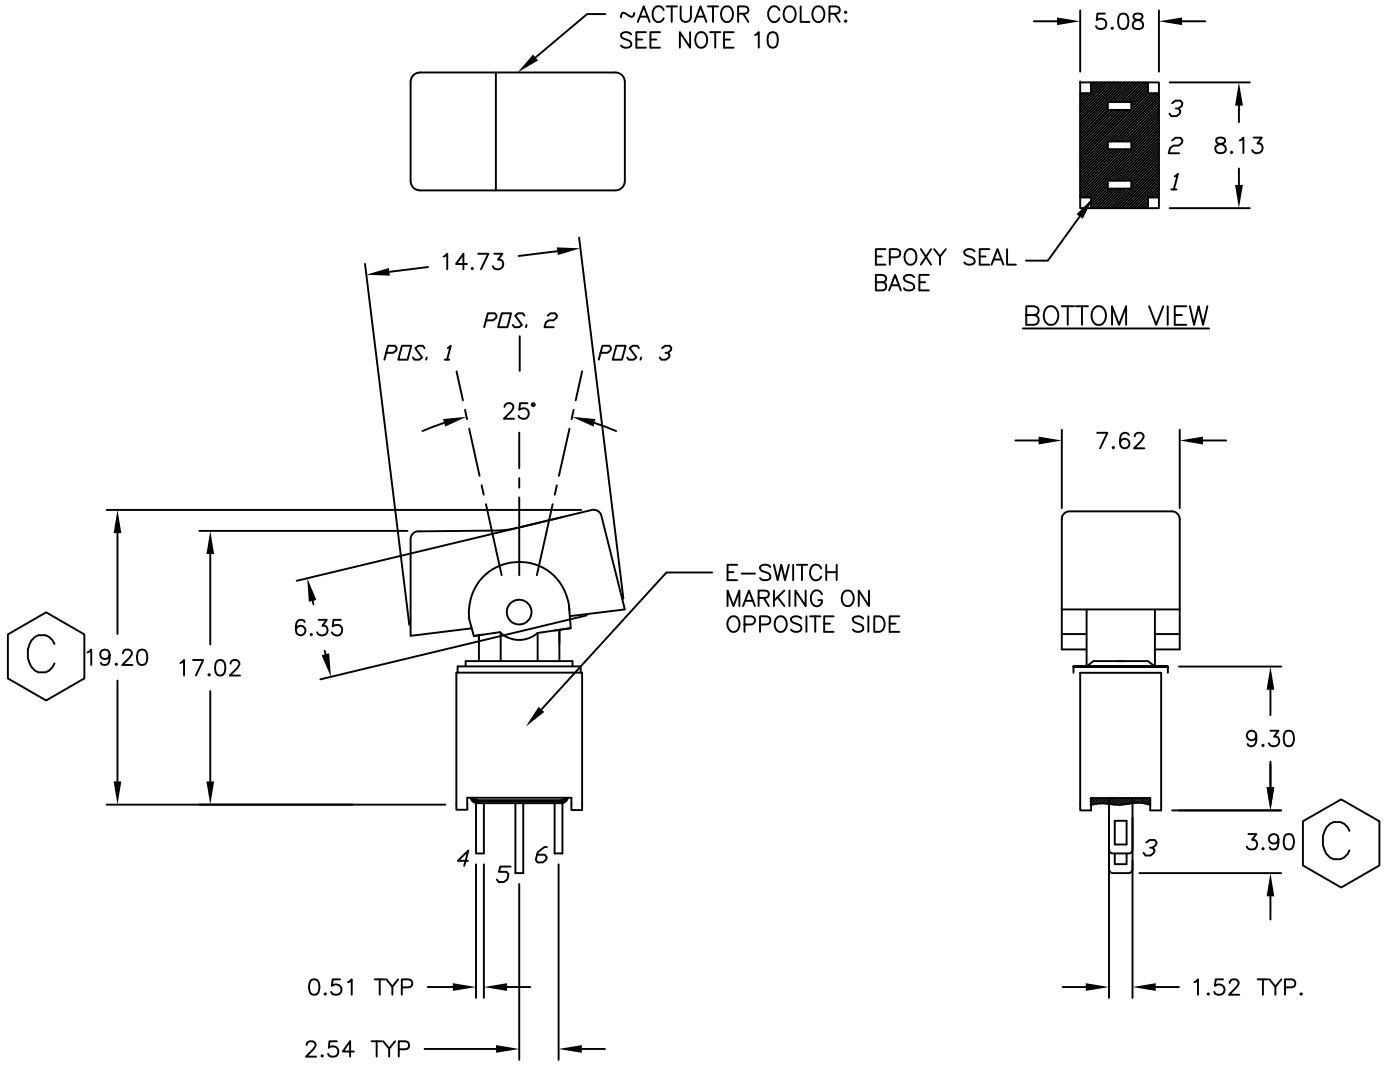



CIRCUIT: SPDT
CONTACT CONFIGURATION

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
(ON)	OFF	(ON)
2-3	OPEN	2-1

( )=Momentary

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 3A @120VAC or 28VDC.
   1A @250VAC.
5. FIXED TERM/MOVING CONTACT
   COPPER ALLOY W/SILVER PLATING
6. ELECTRICAL LIFE: 30,000 MAKE-AND-BREAK
   CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1000M OHM TYPICAL
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL
9. OPERATING TEMP.: -30°C to +85°C
10. ACTUATOR: NYLON BLACK (UL94-HB)

REV.	ECN No.	DESCRIPTION	DATE	CHKD
C	21489	19.20 WAS 19.89, 3.90 WAS 4.06	6/23/14	EBP
B	12664	REVISED NOTE 4	12/26/02	CB
A	12207	RELEASED FOR PRODUCTION	9/13/02	CB

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: 400AWMSP4R1BLKM1QE

SCALE	DATE	DR	DWG	REV
2:1	9/13/02	CB	T403407	C