

LF500RW Series


Wide Input, 5W SMT Single & Dual Output DC/DC Converters



Key Features:

- 5W Output Power
- Wide 2:1 Inputs
- Miniature SMT Case
- Tight Line/Load Regulation
- 1,500 VDC Isolation
- -40°C to +71°C Operation
- 21 Standard Models
- 1.0 MH MTBF Minimum
- Industry Standard Pin-Out

RoHS



Tape/Reel
Available

MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226

F: (781) 344-8481

E: sales@micropowerdirect.com

W: www.micropowerdirect.com



Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Start Voltage	12 VDC Input	7.5	8.0	9.0	VDC
	24 VDC Input	14.0	16.0	18.0	
	48 VDC Input	30.0	33.0	36.0	
Reverse Polarity Input Current				1.0	A
Short Circuit Input Power			1,000	3,000	mW
Input Filter	π (Pi) Filter (Meets EN55022 Class A)				

Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Accuracy			±0.5	±1.0	%
Output Voltage Balance	Dual Output, Balanced Load		±0.5	±2.0	%
Line Regulation	For V_{in} = Min to Max		±0.1	±0.3	%
Load Regulation	I_{out} = 20% to 100%		±0.3	±1.0	%
Ripple & Noise (20 MHz)	See Note 1		50	85	mV P - P
Ripple & Noise (20 MHz)				100	mV P - P
Ripple & Noise (20 MHz)				15	mV rms
Output Power Protection		115	140	165	%
Transient Response Time, See Note 2	25% Load Step Change		250	500	μS
Transient Response Deviation			±2	±6	%
Temperature Coefficient			±0.01	±0.02	%/°C
Output Short Circuit	Continuous (Autorecovery)				

General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	60 Seconds	1,500			VDC
Isolation Resistance	1,000 VDC	1,000			MΩ
Isolation Capacitance	100 kHz, 1V		650	750	pF
Switching Frequency		200	260	350	kHz

Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	-40	+25	+71	°C
Operating Temperature Range	Case			+90	°C
Storage Temperature Range		-40		+125	°C
Cooling	Free Air Convection				
Humidity	RH, Non-condensing			95	%

Physical

Case Size	1.31 x 0.81 x 0.40 Inches (33.4 x 20.6 x 10.2 mm)				
Case Material	Non-Conductive Black Plastic (UL94-V0)				
Weight	0.49 Oz (14g)				

Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	1.0			MHours

Absolute Maximum Ratings

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Surge (1 Sec)	12 VDC Input	-0.7		25.0	VDC
	24 VDC Input	-0.7		50.0	
	48 VDC Input	-0.7		100.0	
Lead Temperature	1.5 mm From Case For 10 Sec.			260	°C
Internal Power Dissipation	All Models			2,500	mW

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.

www.micropowerdirect.com

Model Selection Guide

www.micropowerdirect.com

Model Number	Input				Output			Reflected Ripple Cur. (mA)	Efficiency (% Typ)	Fuse Rating Slow-Blow (mA)
	Voltage (VDC)		Current (mA)		Voltage (VDC)	Current (mA, Max)	Current (mA, Min)			
	Nominal	Range	Full-Load	No-Load						
LF501RW	12	9.0 - 18.0	434	20	3.3	1,200	120.0	25	76	1,500
LF502RW	12	9.0 - 18.0	521	20	5.0	1,000	100.0	25	80	1,500
LF503RW	12	9.0 - 18.0	502	20	12.0	417	41.7	25	83	1,500
LF504RW	12	9.0 - 18.0	502	20	15.0	333	33.3	25	83	1,500
LF505RW	12	9.0 - 18.0	521	20	±5.0	±500	±50.0	25	80	1,500
LF506RW	12	9.0 - 18.0	501	20	±12.0	±208	±20.8	25	83	1,500
LF507RW	12	9.0 - 18.0	503	20	±15.0	±167	±16.7	25	83	1,500
LF511RW	24	18.0 - 36.0	212	5	3.3	1,200	120.0	15	78	700
LF512RW	24	18.0 - 36.0	254	5	5.0	1,000	100.0	15	82	700
LF513RW	24	18.0 - 36.0	245	5	12.0	417	41.7	15	85	700
LF514RW	24	18.0 - 36.0	245	5	15.0	333	33.3	15	85	700
LF515RW	24	18.0 - 36.0	254	5	±5.0	±500	±50.0	15	82	700
LF516RW	24	18.0 - 36.0	245	5	±12.0	±208	±20.8	15	85	700
LF517RW	24	18.0 - 36.0	246	5	±15.0	±167	±16.7	15	85	700
LF521RW	48	36.0 - 75.0	106	3	3.3	1,200	120.0	10	78	350
LF522RW	48	36.0 - 75.0	127	3	5.0	1,000	100.0	10	82	350
LF523RW	48	36.0 - 75.0	123	3	12.0	417	41.7	10	85	350
LF524RW	48	36.0 - 75.0	122	3	15.0	333	33.3	10	85	350
LF525RW	48	36.0 - 75.0	127	3	±5.0	±500	±50.0	10	82	350
LF526RW	48	36.0 - 75.0	122	3	±12.0	±208	±20.8	10	85	350
LF527RW	48	36.0 - 75.0	123	3	±15.0	±167	±16.7	10	85	350

Notes:

- When measuring output ripple, it is recommended that an external 0.47 μ F ceramic capacitor be placed from the +Vout pin to the -Vout pin for single output units and from each output to common for dual output units. For noise sensitive applications, the use of 3.3 μ F capacitors will reduce the output ripple.
- Transient recovery is measured to within a 1% error band for a load step change of 75% to 100%.
- No-load operation will not damage these units, however, they may not meet specifications.
- Dual output units may provide a 10V, 24V or 30V output. To do this, connect the load across the positive (+Vout) and negative (-Vout) outputs and float the output common.
- The converter should be connected to a low ac-impedance source. An input source with a highly inductive impedance may affect the stability of the converter. In applications where the converter output loading is high and input power is supplied over long lines, it may be necessary to use a capacitor on the input to insure start-up. In this case, it is recommended that a low ESR (ESR < 1.0 Ω at 100 kHz) capacitor be mounted close to the converter. For 12V input units a 4.7 μ F is recommended, and for 24V & 48V units a 2.2 μ F.
- It is recommended that a fuse be used on the input of a power supply for protection. See the table above for the correct rating.

Remote ON/OFF

Parameter	Condition	Units
Supply On	2.5 to 5.5 or Open Circuit	VDC
Supply Off	-0.7 to 0.8	VDC
Standby Input Current	10	mA
Control Common	Referenced to Negative Input (-Vin)	

Remote ON/OFF Notes:

- Maximum sink current at the on/off pin (pin 1) during a logic low is 300 μ A.
- Maximum allowable leakage current of a switch connected to the on/off terminal (Pin 1) at logic high (2.5V to 100V) is 200 μ A.

Capacitive Load


Single Output (Max)	Dual Output (Max)
680 μ F	100 μ F

Pin Connections


Pin	Single	Dual
1	On/Off	On/Off
2	-Vin	-Vin
3	-Vin	-Vin
9	NC	Common
10	NC	NC
11	NC	-Vout
12	NC	NC
13	NC	NC
14	+Vout	+Vout
15	NC	NC
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin
24	NC	NC

NC: No Connection


Board Layout

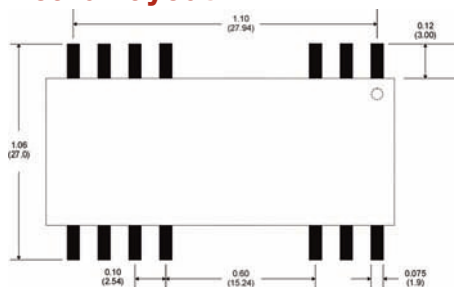

Derating Curve

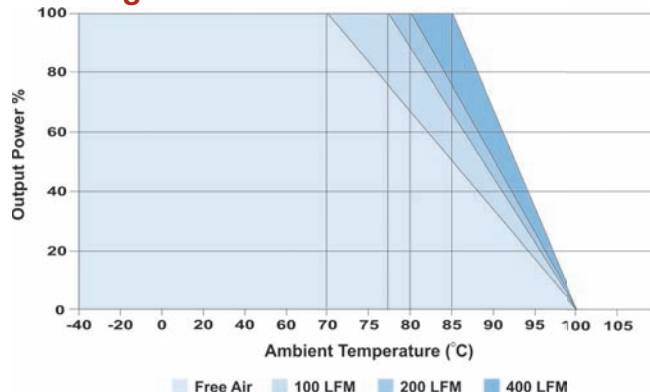

Mechanical Dimensions

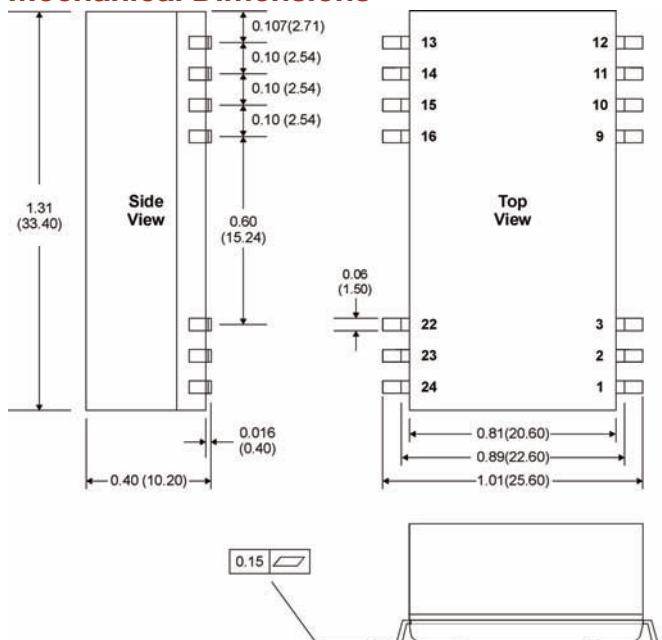

Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ± 0.01 (± 0.25)
- Pin 1 is marked by a "dot" or indentation on the unit



MicroPower Direct
We Power Your Success - For Less!

292 Page Street Ste D Stoughton, MA 02072 • TEL: (781) 344-8226 • FAX: (781) 344-8481 • E-Mail: sales@micropowerdirect.com