

1A Avg.

200 Volts


SBD

10EHA20

■最大定格 Maximum Ratings

Item	Symbol	Conditions	Unit
くり返しピーク逆電圧 Repetitive Peak Reverse Voltage	V_{RRM}	200	V
平均整流電流 Average Rectified Forward Current	I_O	50Hz、正弦半波通電抵抗負荷 50Hz Half Sine Wave Resistive Load	
		$T_a=40^{\circ}\text{C}^*$	1.0 A
		$T_a=25^{\circ}\text{C}^*$	0.9 A
実効順電流 R.M.S. Forward Current	$I_F(\text{RMS})$	1.57	A
サージ順電流 Surge Forward Current	I_{FSM}	20 50Hz正弦半波, 1サイクル, 非くり返し 50Hz Half Sine Wave, 1cycle, Non-repetitive	A
動作接合温度範囲 Operating Junction Temperature Range	T_{jw}	$-40\sim+150$	$^{\circ}\text{C}$
保存温度範囲 Storage Temperature Range	T_{stg}	$-40\sim+150$	$^{\circ}\text{C}$

■OUTLINE DRAWING(mm)

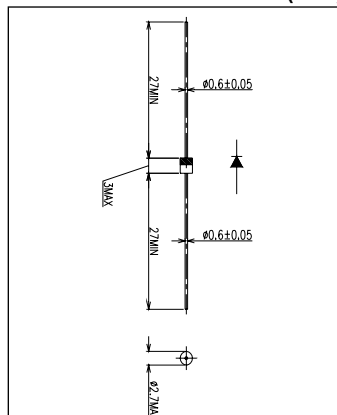

■APPROX. NET WEIGHT:0.17g

■電氣的・熱的特性 Electrical/Thermal Characteristics

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
ピーク逆電流 Peak Reverse Current	I_{RM}	$T_j=25^{\circ}\text{C}, V_{RM}=V_{RRM}$	—	—	200	mA
ピーク順電圧 Peak Forward Voltage	V_{FM}	$T_j=25^{\circ}\text{C}, I_{FM}=1\text{A}$	—	—	0.90	V
熱抵抗 Thermal Resistance	$R_{th(j-a)}$	接合部・周囲間 Junction to Ambient	—	—	110	$^{\circ}\text{C}/\text{W}$
		基板実装* P.C.Board mounted*	—	—	140	$^{\circ}\text{C}/\text{W}$
		Without P.C.Board mounted	—	—	140	$^{\circ}\text{C}/\text{W}$

* Print Lands=5×5mm, Both sides

■定格・特性曲線

