

HIGH SPEED COMBO MAGNETIC MODULES FOR 10/100BASE-TX APPLICATIONS

P/N: LU1T14R XFMRS

Page 1/2

Feature

- Meets open circuit inductance (OCL) specifications of 350 uH Min with 8mA DC Bias from 0°C -70°C.
- Combo designs available for all 10/100 Base-TX PHY chips.
- Custom designs available for most applications.
- Operating temperature range: 0°C to +70°C.
- Storage temperature range: -40°C to +125°C.

Electrical Specifications @ 25°C

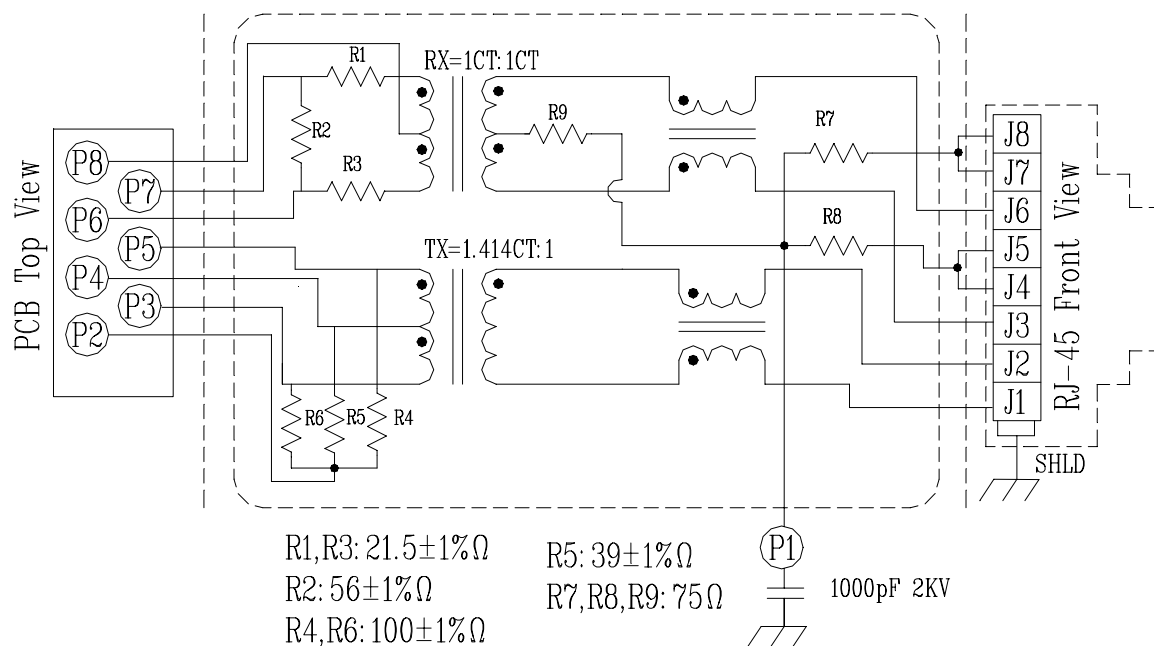
Part Number	Turns Ratio (±5%)		Inductance (uH Min) @100 KHz/100mVrms with 8mA DC Bias	Cross talk (dB Max)		
	TX	RX		32 MHz	62 MHz	100 MHz
LU1T14R	1.414CT:1	1CT:1CT	350	-40	-35	-35

Continue

Part Number	Insertion Loss (dB TYP)	Return Loss (dB TYP)			HI-POT (Vrms Min)
	0.3-100MHz	30MHz	60MHz	80MHz	
LU1T14R	-1.0	-16	-12	-10	1500

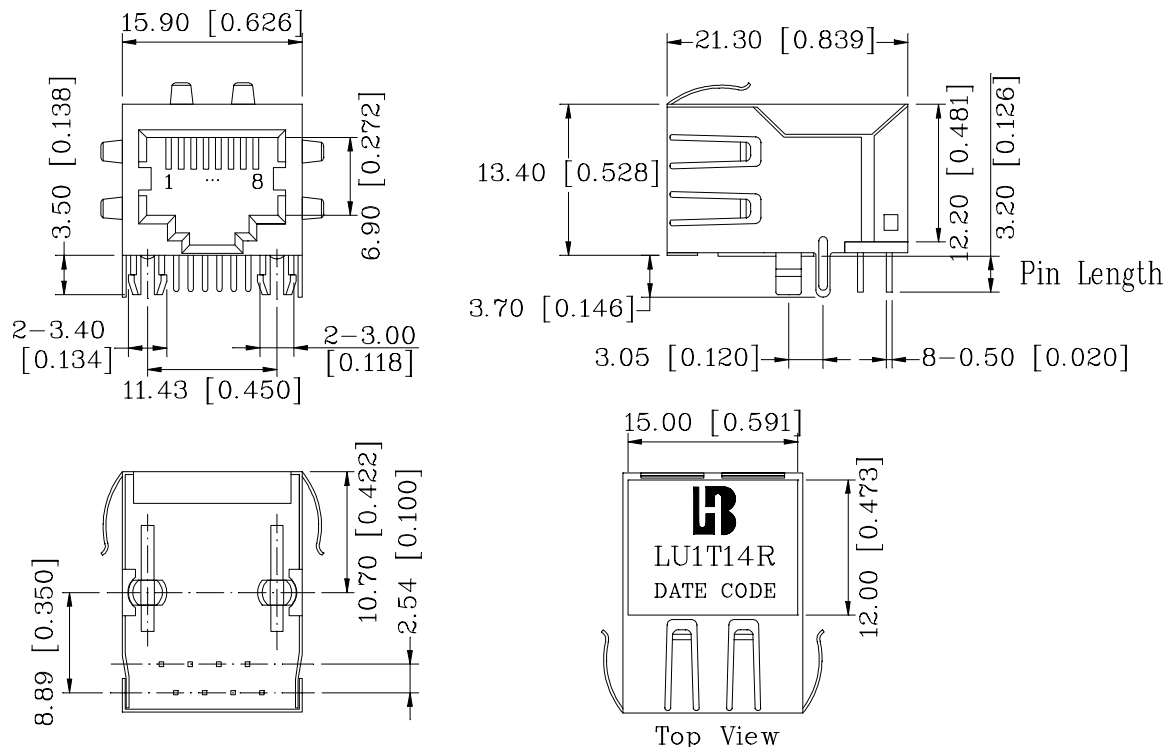
Schematic

Block Circuit x 1 Set In LU1T14R



HIGH SPEED COMBO MAGNETIC MODULES FOR 10/100BASE-TX APPLICATIONS**P/N: LU1T14R XFMRS**

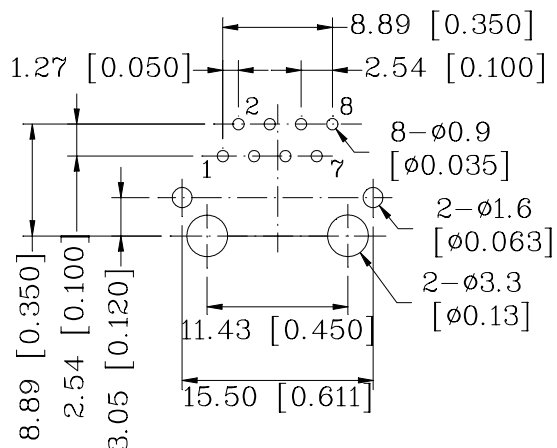
Page 2/2

Mechanical

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]

0.xx±0.05[0.002]

- | | |
|---------------------|---|
| 1. Plastic Material | : PBT 15% Glass Filled(UL 94V-0), Black Housing |
| 2. Metal Shield | : Brass C2680-H, 20u Nickel Plated, t=0.25mm |
| 3. Spring Wire | : 0.45mm Dia. Phosphor bronze with 6u gold plated |
| 4. Solder Pin | : 0.4x0.4mm, Phosphor bronze with solder Plated |
| 5. Durability | : 300 Mating cycles Min. |

PCB Layout Mounting Hole(Top View)

Units: mm[Inches]

Tolerances: xx.x0±0.25[0.010]

0.xx±0.05[0.002]