



Bridge Rectifiers



Features

- UL recognition, file #E313149
- Ideal for automated placement
- High surge current capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

Typical Applications

General purpose use in AC/DC bridge full wave rectification for power supply, lighting ballast, battery charger, home appliances, office equipment, and telecommunication applications.

Mechanical Data

- **Package:** MBS
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked on body

■ Maximum Ratings (T_a=25°C Unless otherwise specified)

PARAMETER		SYMBOL	UNIT	MB1S	MB2S	MB4S	MB6S	MB8S	MB10S
Device marking code				MB1S	MB2S	MB4S	MB6S	MB8S	MB10S
Repetitive peak reverse voltage		VRRM	V	100	200	400	600	800	1000
Average rectified output current @60Hz sine wave, R-load, Ta=40℃	On alumina substrate	Io	A	0.8					
	On glass-epoxi substrate			0.5					
Surge(non-repetitive)forward current @60Hz half sine wave, 1 cycle, Tj=25℃		IFSM	A	30					
Current squared time @1ms≤t≤8.3ms Tj=25℃,rating of per diode		I²t	A²s	3.7					
Storage temperature		Tstg	℃	-55 ~+150					
Junction temperature		Tj	℃	-55 ~+150					

■ Electrical Characteristics (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	MB1S	MB2S	MB4S	MB6S	MB8S	MB10S
Maximum instantaneous forward voltage drop per diode	V _F	V	I _{FM} =0.4A	1.00					
Maximum DC reverse current at rated DC blocking voltage per diode	I _{RRM}	μA	V _{RM} =V _{RRM}	5					



MB1S THRU MB10S





■ Thermal Characteristics ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER		SYMBOL	UNIT	MB1S	MB2S	MB4S	MB6S	MB8S	MB10S
Thermal Resistance	Between junction and ambient, On alumina substrate	R θ J-A	$^\circ\text{C}/\text{W}$	76.0					
	Between junction and ambient, On glass-epoxy substrate	R θ J-A		134.0					
	Between junction and lead	R θ J-L		20.0					

■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MB1S-MB10S	F1	Approximate 0.12	2500	5000	40000	13' reel


■ Characteristics(Typical)

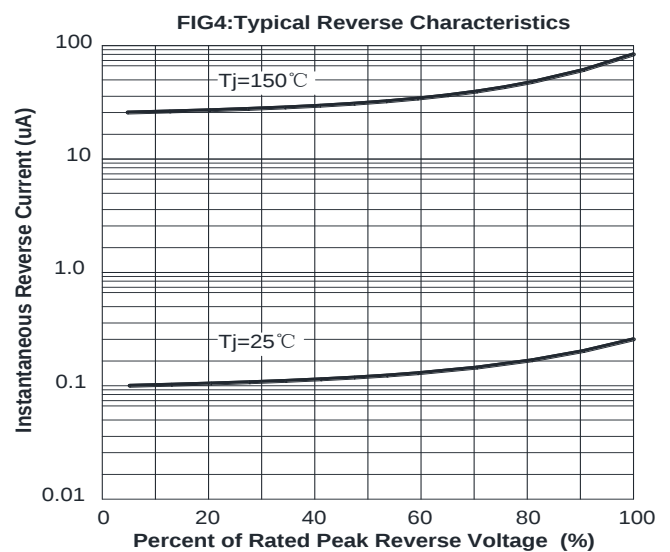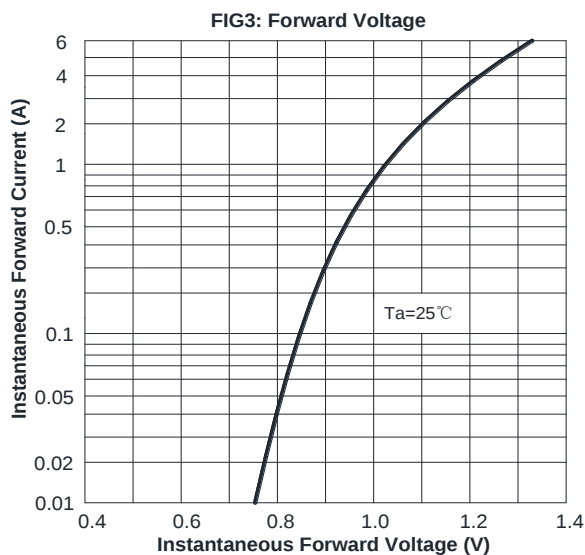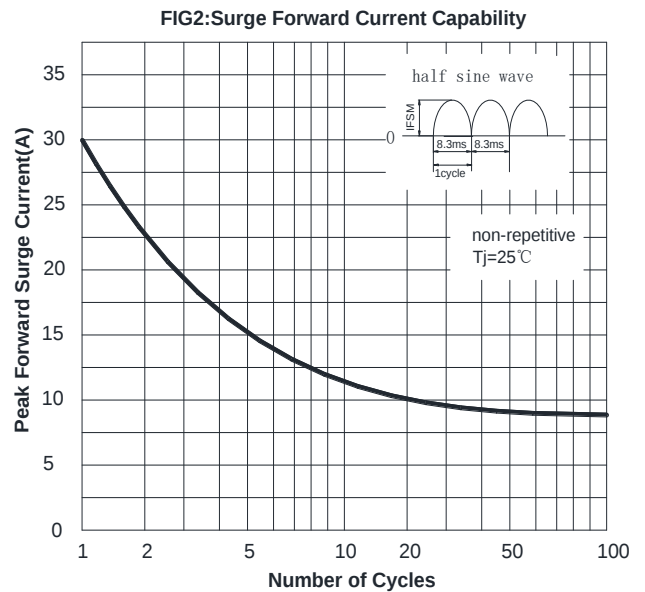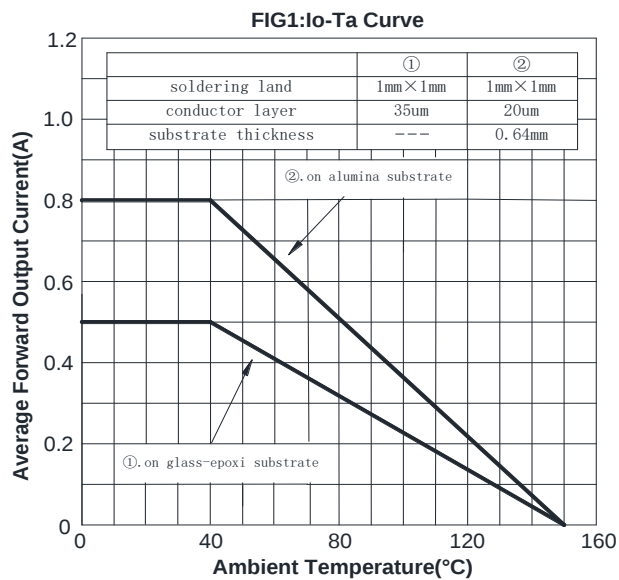




MB1S THRU MB10S

■ Outline Dimensions

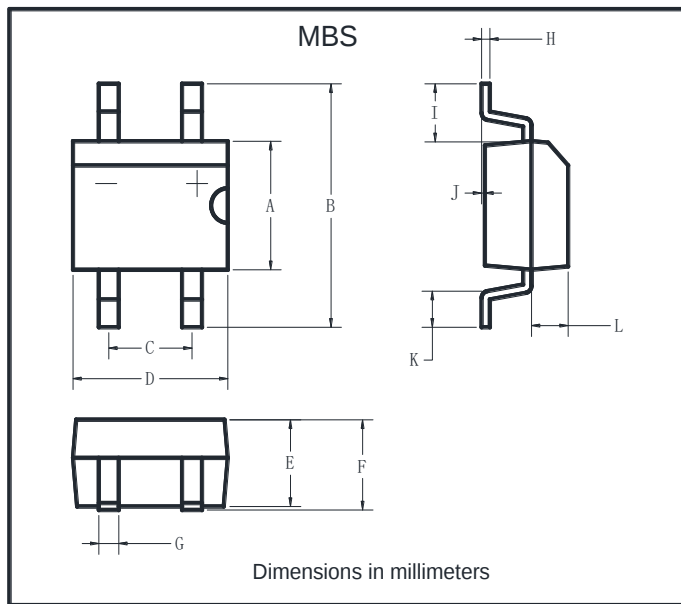

MBS		
Dim	Min	Max
A	3.60	4.00
B	7.00 Max	
C	2.20	2.60
D	4.50	4.90
E	2.30	2.70
F	3.00 Max	
G	0.56	0.84
H	0.15	0.35
I	1.10	2.12
J	0.20 Max	
K	0.70	1.10
L	0.95	1.53

■ Suggested pad layout

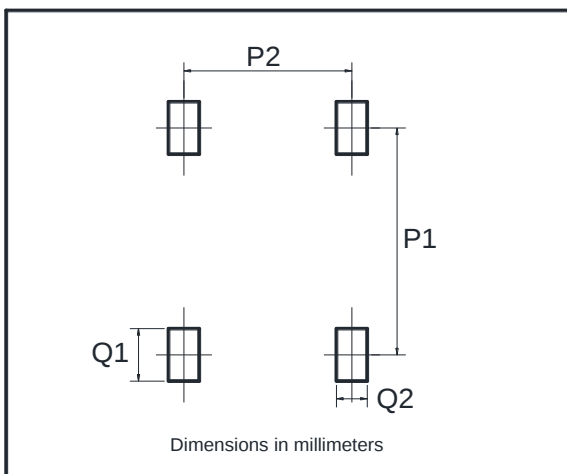

Dim	Min
P1	6.00
P2	2.40
Q1	1.84
Q2	1.20



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.