
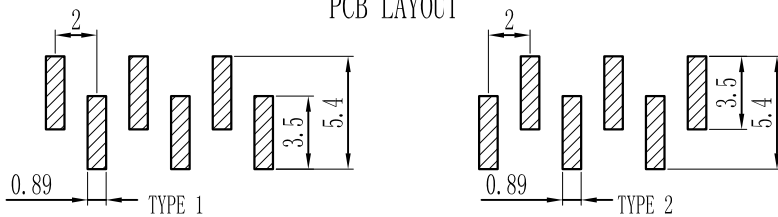
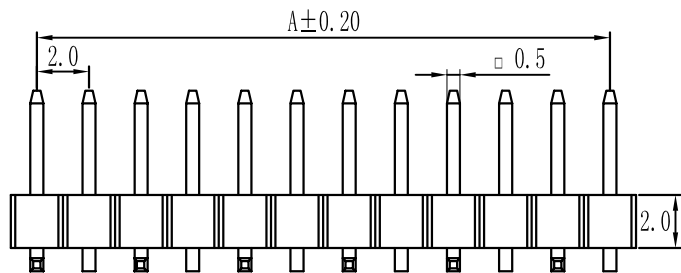


| Pin数 | 尺寸A  | 尺寸B  |
|------|------|------|
| 1    |      | 2.0  |
| 2    | 2.0  | 4.0  |
| 3    | 4.0  | 6.0  |
| 4    | 6.0  | 8.0  |
| 5    | 8.0  | 10.0 |
| 6    | 10.0 | 12.0 |
| 7    | 12.0 | 14.0 |
| 8    | 14.0 | 16.0 |
| 9    | 16.0 | 18.0 |
| 10   | 18.0 | 20.0 |
| 11   | 20.0 | 22.0 |
| 12   | 22.0 | 24.0 |
| 13   | 24.0 | 26.0 |
| 14   | 26.0 | 28.0 |
| 15   | 28.0 | 30.0 |
| 16   | 30.0 | 32.0 |
| 17   | 32.0 | 34.0 |
| 18   | 34.0 | 36.0 |
| 19   | 36.0 | 38.0 |
| 20   | 38.0 | 40.0 |
| 21   | 40.0 | 42.0 |
| 22   | 42.0 | 44.0 |
| 23   | 44.0 | 46.0 |
| 24   | 46.0 | 48.0 |
| 25   | 48.0 | 50.0 |
| 26   | 50.0 | 52.0 |
| 27   | 52.0 | 54.0 |
| 28   | 54.0 | 56.0 |
| 29   | 56.0 | 58.0 |
| 30   | 58.0 | 60.0 |
| 31   | 60.0 | 62.0 |
| 32   | 62.0 | 64.0 |
| 33   | 64.0 | 66.0 |
| 34   | 66.0 | 68.0 |
| 35   | 68.0 | 70.0 |
| 36   | 70.0 | 72.0 |
| 37   | 72.0 | 74.0 |
| 38   | 74.0 | 76.0 |
| 39   | 76.0 | 78.0 |
| 40   | 78.0 | 80.0 |

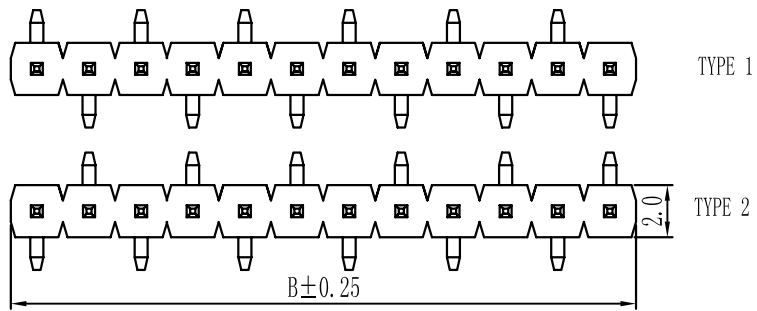

### Specifications :

- Voltage rating: 250VAC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40 to +105
- Insulation resistance: ≥1000M Min
- Contact resistance: ≤20M Max
- Material: PA6T 94V-0
- Plating Category: 1U"Gold
- Color: Blank-Natural color

X4611 W V S - XX I -C40 D44 -X

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Category: W-wafer
- ③ Welding Board Angle: V- Stright 90°
- ④ Welding Way: S-SMT
- ⑤ Row No -Pin No : XX- 01P-40P
- ⑥ Plastic height: l=2.0mm
- ⑦ Pin length:C=4.0mm
- ⑧ Pin length:D=6.4mm
- ⑨ TYPE: R1 ; R2

|                       |            |               |             |                       |
|-----------------------|------------|---------------|-------------|-----------------------|
| X4611WVS-XXI-C40D44-X | PA6T 94V-0 | Brass         | 1U"Gold     | X4611F                |
| PART NO               | Material   | Material(Pin) | Finlsh(Pin) | Suitable XKB Terminal |

For and on behalf of  
**XKB INDUSTRIAL PRECISION CO., LIMITED**  
**香港星坤工業精密有限公司**

Authorized Signature(s)

|      |      |            |  |
|------|------|------------|--|
| DSND | DATE | SCALE: N/A | MODEL TYPE:<br>X4611WVS-XXI-C40D44-X       |
| DWN  | DATE | VIEW:      | PART NO.:<br>2.0 mm Crimp Style Connectors |
| CHKD | DATE | UNIT: mm   | DWG NO.:                                   |
| APPD | DATE | SIZE: A4   |  |
|      |      |            | WEIGHT<br>1.0g                             |
|      |      |            | SHEET<br>1/1                               |
|      |      |            | REVISION<br>A0                             |

**XKB INDUSTRIAL PRECISION CO., LIMITED**

|             |      |
|-------------|------|
| ANGULAR     | ±5°  |
| L ≤ 4       | ±0.2 |
| 4 < L ≤ 16  | ±0.3 |
| 16 < L ≤ 63 | ±0.4 |
| L > 63      | ±0.5 |

UNSPECIFIED TOLERANCES