METAL OXIDE VARISTOR
7mm Disc


RoHS

■ 7 JVR VARISTOR

Part Number	Maximum Allowable Voltage		Varistor Voltage V@0.1mA		Maximum Clamping Voltage	Withstanding Surge Current		Rated Wattage	Energy 10/1000 s	UL	CSA	VDE
	ACrms (V)	DC (V)	(V)	Tolerance Range	V@ 5A (V)	1Time (A)	2 Times (A)	(W)	(J)			
JVR07N180M65□△△	11	14	18	± 20%	• 36	250	125	0.02	1.2	✓		
JVR07N220L 65□△△	14	18	22	± 15%	• 43				1.4	✓		
JVR07N270K65□△△	17	22	27		• 53				1.7	✓		
JVR07N330K65□△△	20	26	33		• 65				2.2	✓		
JVR07N390K65□△△	25	31	39		• 77				2.4	✓		
JVR07N470K65□△△	30	38	47		• 93				3.	✓		
JVR07N560K65□△△	35	45	56		• 110				3.5	✓		
JVR07N680K65□△△	40	56	68		• 135				4.3	✓		
JVR07N820K65□△△	50	65	82		135	1200	600	0.25	5.5	✓		✓
JVR07N101K65□△△	60	85	100		165				7.0	✓		✓
JVR07N121K65□△△	75	100	120		200				8.0	✓		✓
JVR07N151K65□△△	95	125	150		250				11.0	✓		✓
JVR07N181K65□△△	115	150	180		300				13.0	✓		✓
JVR07N201K65□△△	130	170	200		340				14.3	✓	✓	✓
JVR07N221K65□△△	140	180	220	±10%	360				15.5	✓	✓	✓
JVR07N241K65□△△	150	200	240		395				16.8	✓	✓	✓
JVR07N271K65□△△	175	225	270		455				19.8	✓	✓	✓
JVR07N301K65□△△	195	250	300		505				21.0	✓	✓	✓
JVR07N331K65□△△	210	275	330		550				23.0	✓	✓	✓
JVR07N361K65□△△	230	300	360		595				26.0	✓	✓	✓
JVR07N391K65□△△	250	320	390		650				30.0	✓	✓	✓
JVR07N431K65□△△	275	350	430		710				33.0	✓	✓	✓
JVR07N471K65□△△	300	385	470		775				35.0	✓	✓	✓
JVR07N511K65□△△	320	418	510		842				37.0	✓	✓	
JVR07N561K65□△△	350	460	560		920				39.0	✓	✓	
JVR07N621K65□△△	385	505	620		1025				41.0	✓	✓	
JVR07N681K65□△△	420	560	680		1120				43.0	✓	✓	
JVR07N751K65□△△	460	615	750		1240				45.0	✓	✓	
JVR07N781K65□△△	485	640	780		1290				46.0	✓	✓	
JVR07N821K65□△△	510	670	820		1355				47.0	✓	✓	

1) The clamping voltage from 180M to 680K are tested with current 2.5A.
For application required ratings not shown, contact RFE application engineering.


□ : Lead Style
Y: vertical kink (standard)
P: straight leads
△△ : Lead Length / Packing Method



P Type Y Type (most popular)

■ PULSE RATING CURVES

JVR-07N180M ~ JVR-07N680K

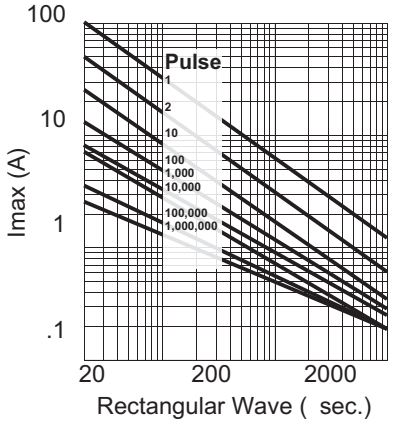

JVR-07N820K ~ JVR-07N821K

