



15 dBm P1dB, 500 MHz to 18 GHz, Medium Power
 Broadband Amplifier, 33 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A3263

The PE15A3263 is a 15 dBm power amplifier designed for operation in the 0.5 GHz to 18 GHz frequency range. The amplifier utilizes high power devices that provide excellent linearity and high gain. High efficiency operation is achieved by using hybrid MIC designs and advanced GaAs PHEMT devices. The amplifier requires only +12 VDC power supply.

Features

- 0.5 GHz to 18 GHz Frequency Range
- P1dB +15 dBm typ.
- Gain 30 dB min.
- Gain Flatness +/-1.5 dB typ

Applications

- Medium Power Amplifier
- Driver Amp
- Military Communications
- Broadband Communication
- Test & Measurement

Electrical Specifications (TA = +25°C, DC Voltage = 12Volts, DC Current = 220mA)

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.5		18	GHz
Gain	30	33		dB
Output at 1 dB Compression Point	+15			dBm
Noise Figure at 0.5 to 2 GHz			5	dB
Noise Figure at 2 to 18 GHz			4	dB
Noise Figure at			3.5	dB
Input VSWR		2:1		
Output VSWR		2:1		
Operating DC Voltage	11	12	13	Volts
Operating DC Current		220		mA
Operating Temperature Range (OTR)	-40		+70	°C

Environmental Specifications

Temperature

Operating Range -40 to +70 deg C

Shock

RTCS, DO-160C

Vibration

RTCS, DO-160C

Temperature Cycle

MIL-STD-883, METHOD 1010

Compliance Certifications (visit www.Pasternack.com for current document)

Not RoHS Compliant

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [15 dBm P1dB, 500 MHz to 18 GHz, Medium Power Broadband Amplifier, 33 dB Gain, SMA PE15A3263](#)





15 dBm P1dB, 500 MHz to 18 GHz, Medium Power
Broadband Amplifier, 33 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A3263

Plotted and Other Data

Notes:

- Values at +25 °C, sea level
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.
- Heat Sink Required for Proper Operation, Unit is cooled by conduction to heat sink.



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [15 dBm P1dB, 500 MHz to 18 GHz, Medium Power Broadband Amplifier, 33 dB Gain, SMA PE15A3263](#)



15 dBm P1dB, 500 MHz to 18 GHz, Medium Power
Broadband Amplifier, 33 dB Gain, SMA

TECHNICAL DATA SHEET PE15A3263

Typical Performance Data

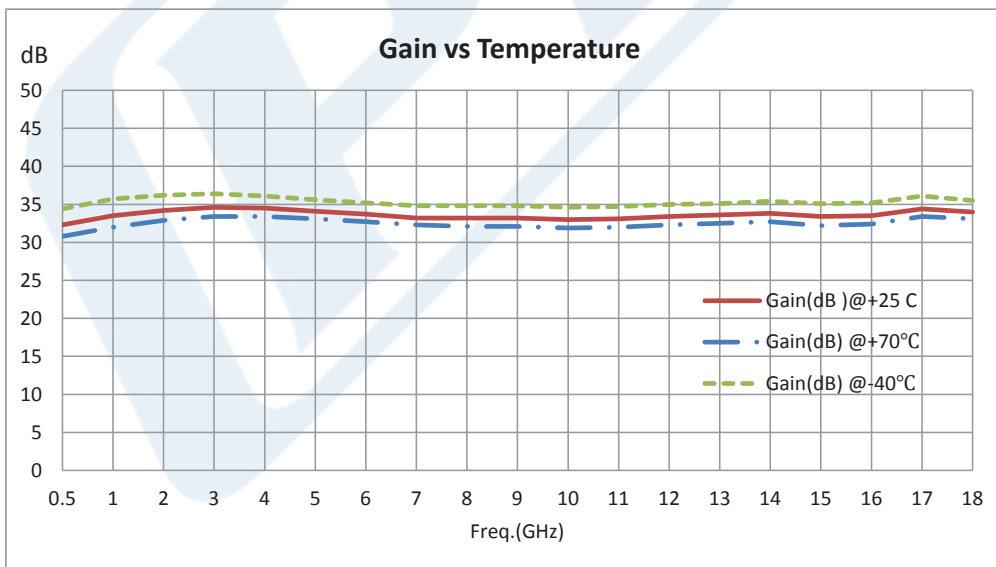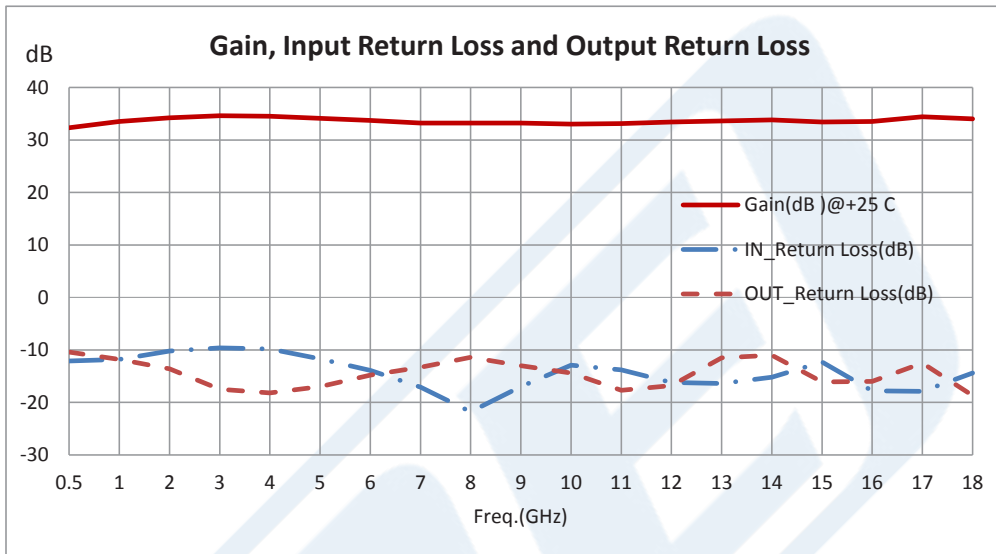

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [15 dBm P1dB, 500 MHz to 18 GHz, Medium Power Broadband Amplifier, 33 dB Gain, SMA PE15A3263](#)







15 dBm P1dB, 500 MHz to 18 GHz, Medium Power
Broadband Amplifier, 33 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A3263

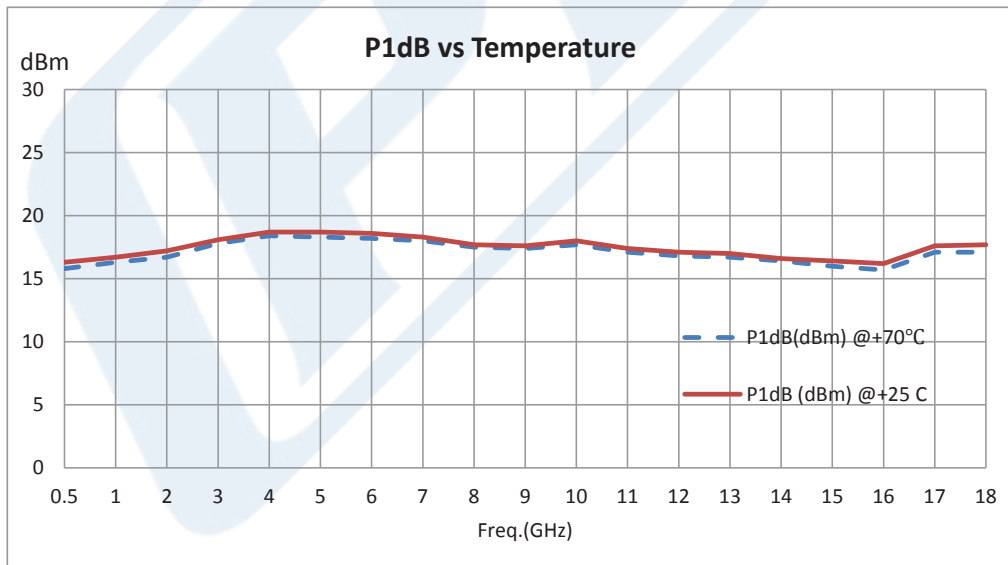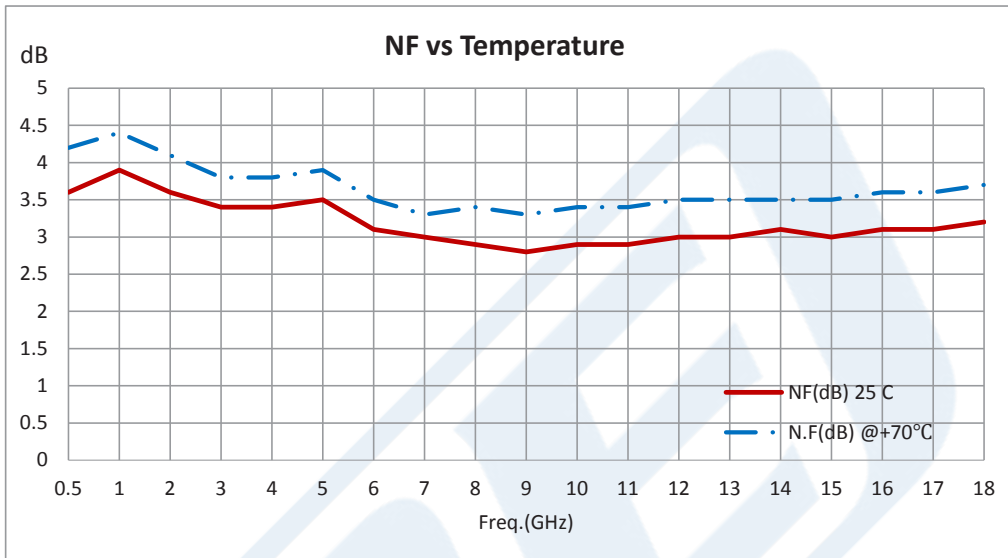

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [15 dBm P1dB, 500 MHz to 18 GHz, Medium Power Broadband Amplifier, 33 dB Gain, SMA PE15A3263](#)





15 dBm P1dB, 500 MHz to 18 GHz, Medium Power
Broadband Amplifier, 33 dB Gain, SMA

TECHNICAL DATA SHEET

PE15A3263

15 dBm P1dB, 500 MHz to 18 GHz, Medium Power Broadband Amplifier, 33 dB Gain, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [15 dBm P1dB, 500 MHz to 18 GHz, Medium Power Broadband Amplifier, 33 dB Gain, SMA PE15A3263](http://www.pasternack.com/18-ghz-medium-power-broadband-amplifier-33-db-gain-sma-pe15a3263-p.aspx)

URL: <http://www.pasternack.com/18-ghz-medium-power-broadband-amplifier-33-db-gain-sma-pe15a3263-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE15A3263 CAD Drawing

15 dBm P1dB, 500 MHz to 18 GHz, Medium Power Broadband Amplifier, 33 dB Gain, SMA

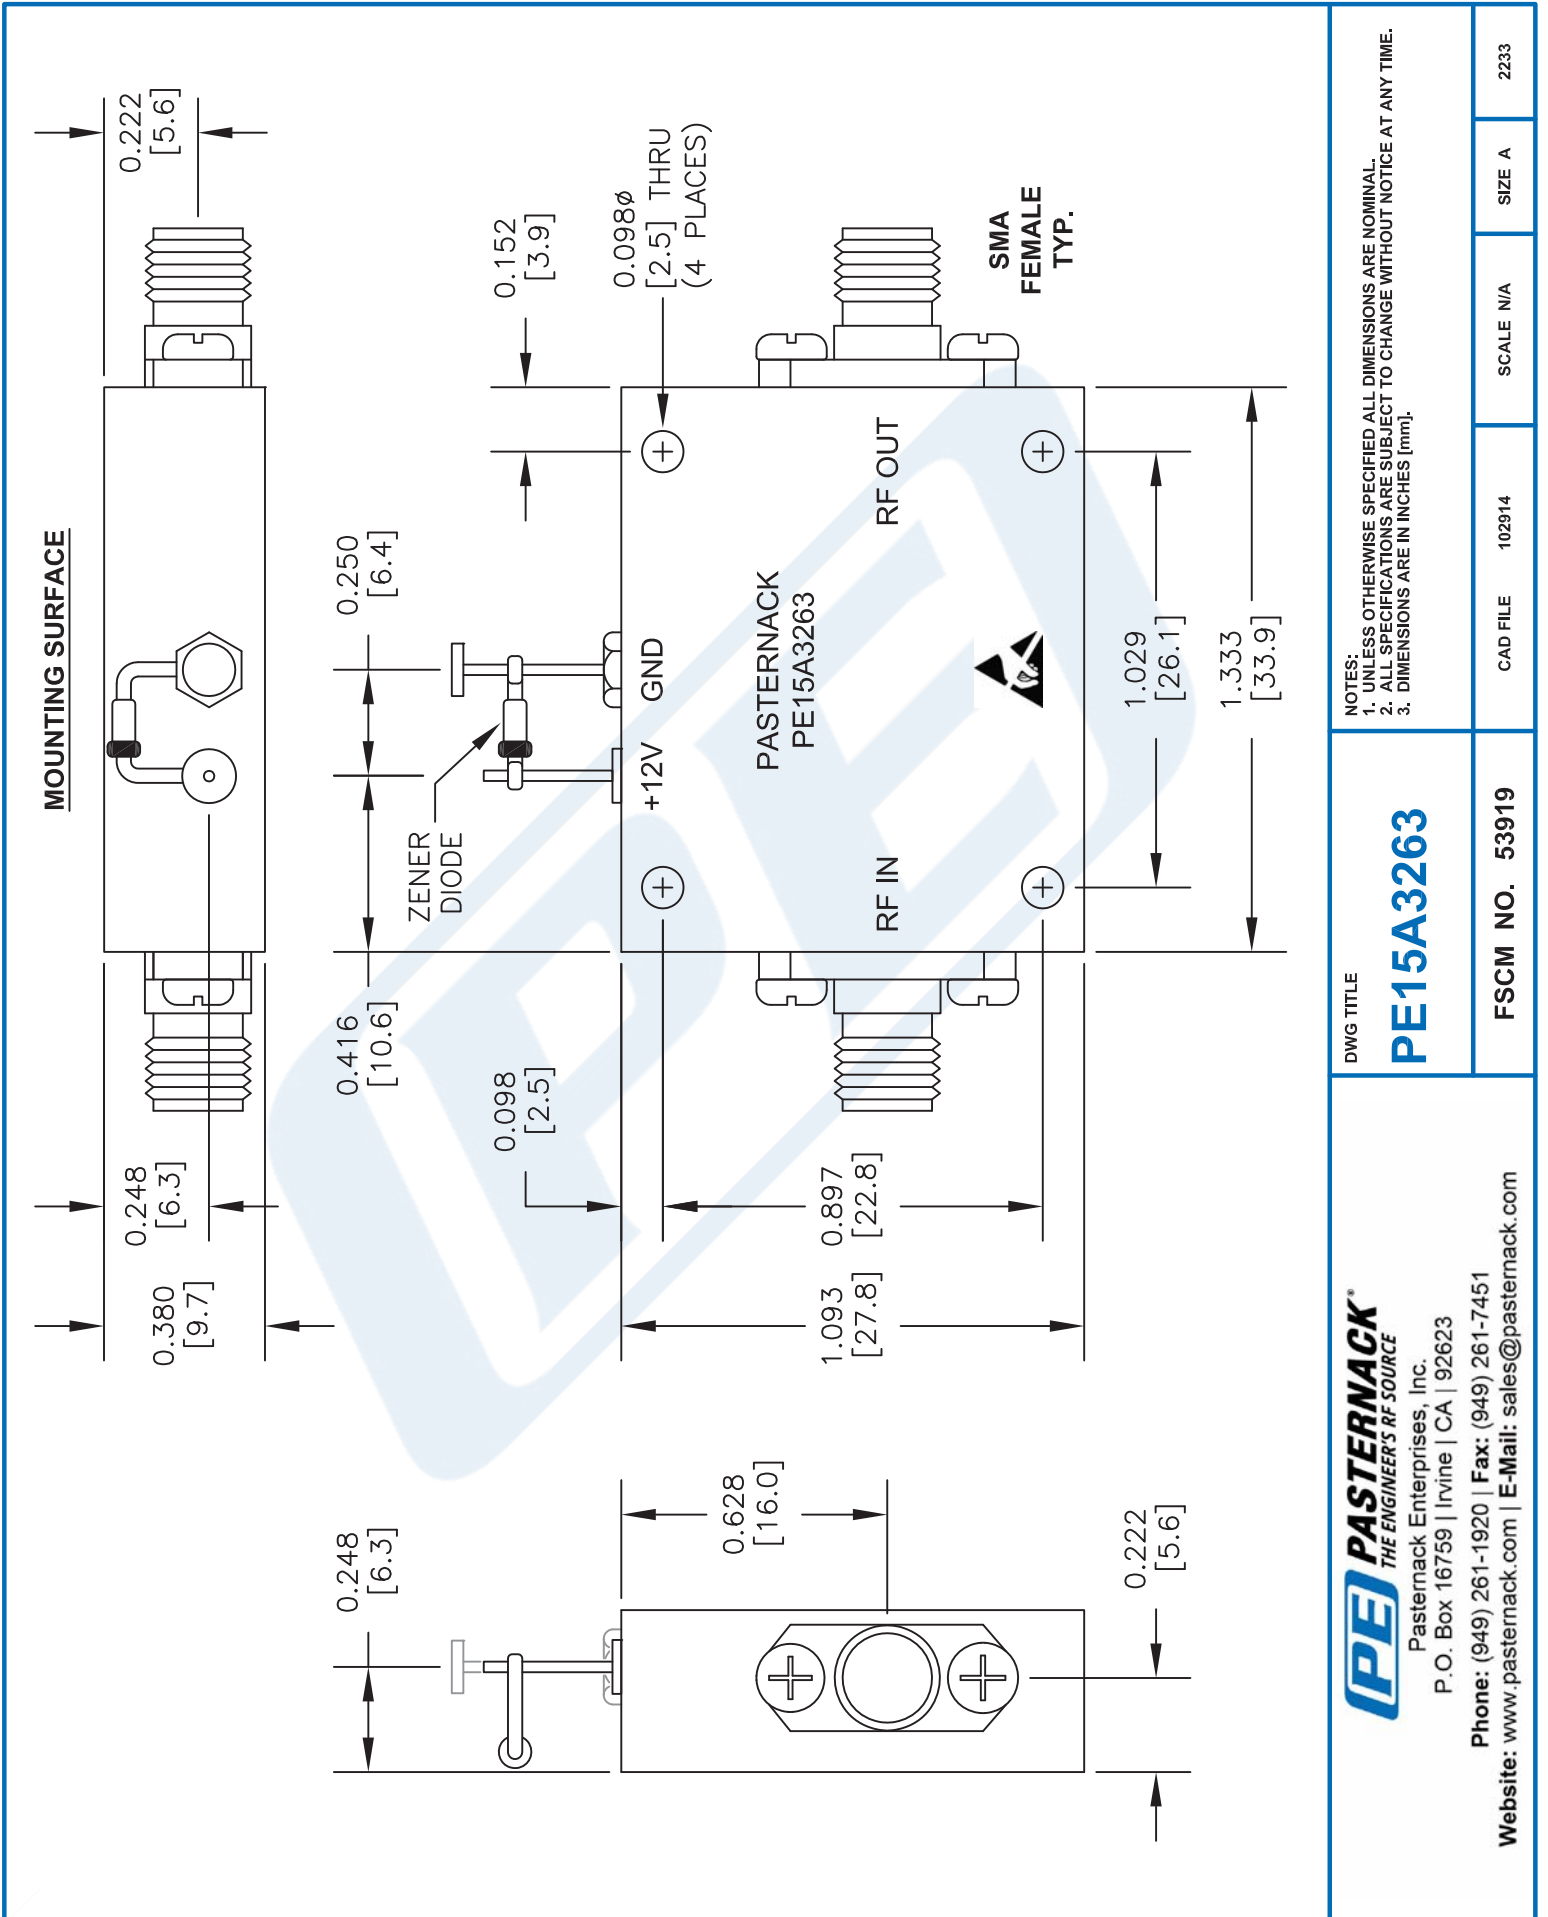

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE15A3263

FSCM NO. 53919

CAD FILE 102914

SCALE N/A

SIZE A

2233

PE PASTERNAK
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com