






REVERSE VOLTAGE: 20 - 80 V
CURRENT: 0.5 A
SOD-123FL

Features

- ✧ Low forward surge current
- ✧ Ideal for surface mouted applications
- ✧ Low leakage current

Mechanical Data

- ✧ Case: JEDEC SOD-123FL, molded plastic over passivated chip
- ✧ Polarity: Color band denotes cathode end
- ✧ Weight: 0.0008 ounces, 0.022 gram
- ✧ Mounting position: Any

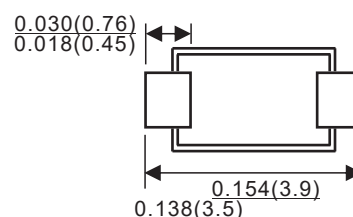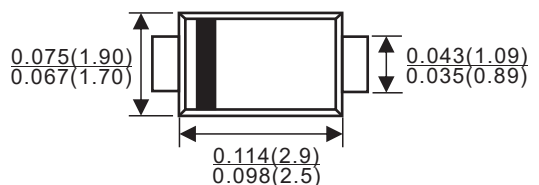

Dimensions in inches and(millimeters)

Absolute Maximum Ratings (Ta = 25 °C)

Symbol	Parameter	Value					Units
V_{RRM}	Maximum recurrent peak reverse voltage	20	30	40	60	80	V
V_{RMS}	Maximum RMS voltage	14	21	28	42	56	
I_O	Continuous Forward Current	0.5					A
I_{FSM}	Non-repetitive Peak Forward Surge Current*1	15					A
P_d	Power Dissipation	410					mW
T_J	Operating temperature range	-55 to +175					°C
T_{STG}	Storage Temperature	-55 to +150					°C

*1 8.3 ms single half sine-wave

Electrical Characteristics (Ta = 25 °C)

Device	Symbol	Parameter	Conditions	Min	Typ	Max	Units
MBR0520 MBR0530 MBR0540 MBR0560 MBR0580	V_F	Forward Voltage	$I_F = 0.5A$			0.45 0.55 0.55 0.70 0.80	V
MBR0520 MBR0530 MBR0540 MBR0560 MBR0580	I_R	Reverse Current	$V_R = 20V$ $V_R = 30V$ $V_R = 40V$ $V_R = 60V$ $V_R = 80V$			20	μA
MBR series	C_T	Capacitance	$V_R = 4V, f = 1MHz$		30		pF

Typical Characteristics

