
HAMMOND MANUFACTURING®

www.hammondmfg.com

# 229C16

## Power Transformer - Dual Primary
## Low Voltage PC Board Mount - Low Profile

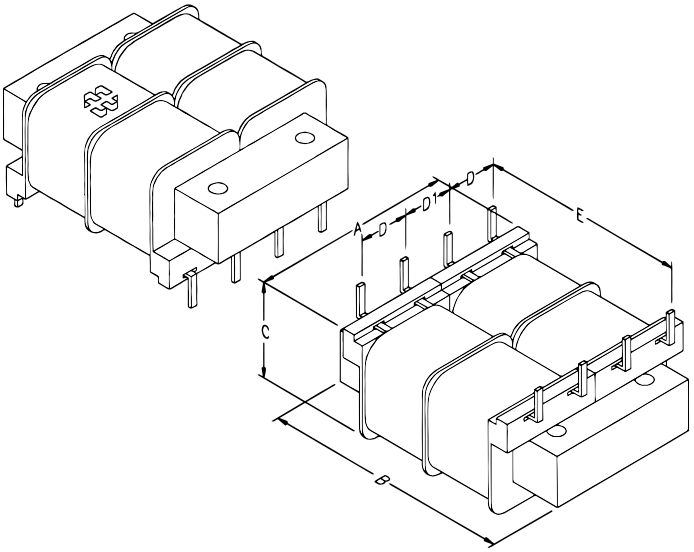



## Features


- Low profile mounting, dual - split bobbin design.
- Low primary to secondary coupling, balanced windings, no electrostatic shield required and low EMF radiation due to semi-toroidal design.
- Universal dual primary 115/230V - 50/60 Hz.
- High insulation - Hipot of 1,750V RMS.
- Class B insulation - 130 degrees C.
- C UL US recognized.

| Mechanical | |
|---|---|
| A | 2.25” (57 mm) |
| B | 2.87” (73 mm) |
| C | 1.25” (32 mm) |
| D | 0.60” (15 mm) |
| D1 | 0.53” (13 mm) |
| E | 1.90” (48 mm) |
| PC Board Spacing | 1.50” (38 mm) |
| Pin Size | 0.04” x 0.04” (1 mm x 1 mm) |
| **Electrical** | |
| Size (VA) | 24 |
| Primary | 115 /230V, 50 /60Hz |
| Secondary (RMS) Series | 16V C.T. @ 1.5A |
| Secondary (RMS) Parallel | 8V @ 3A |
| Regulation | 15% |

### Connection Information - 229 Series Transformers




**Primary Connections -** 229 Series Transformers

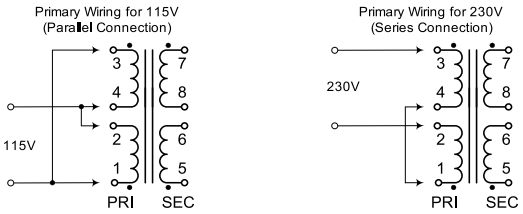


**Secondary Connections -** 229 Series Transformers

