


MultiMag 6

Cable Assembly

L99-A0039-XXX

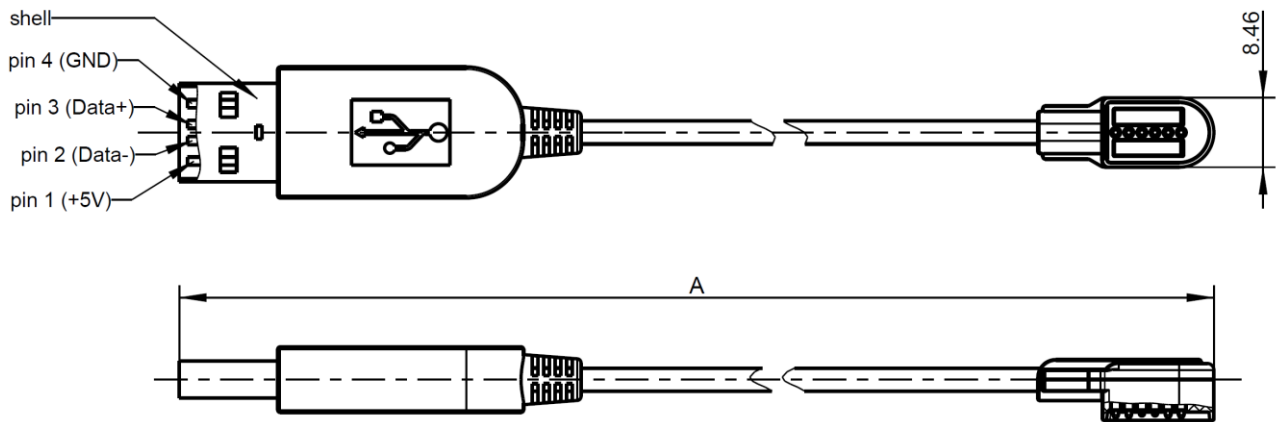

cable length [mm]			
Range length "A"	50 to 100	101 to 1000	1001 to 5000
Tolerance for "A"	±5	±10	±20

All dimensions are in mm; tolerances according to ISO 2768 C

General Information

MultiMag 6 cable assembly consisting of

Break-off plug with magnets
Number and type of contacts

6 spring-loaded contacts

USB 2.0 cable
USB-A connector

Available Versions

Type	Description
L99-029-XXX	Black, similar RAL 9005
L99-A0039-XXX	White, similar RAL 9010


"XXX" = coding for length "A" in mm

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

RF_35/09_14/6.2

Technical Data break-off plug

Belegungsplan / pin and cable table		
USB 2.0 A	Kabel / cable	Magnet-schnittstelle magnetic interface
pin 1	Rot / red	pin 1
pin 2	Weiss / white	pin 2
pin 3	Grün / green	pin 3
pin 4	Schwarz / black	pin 4
pin 5	--- / shell	pin 5
pin 6	--- / shell	pin 6

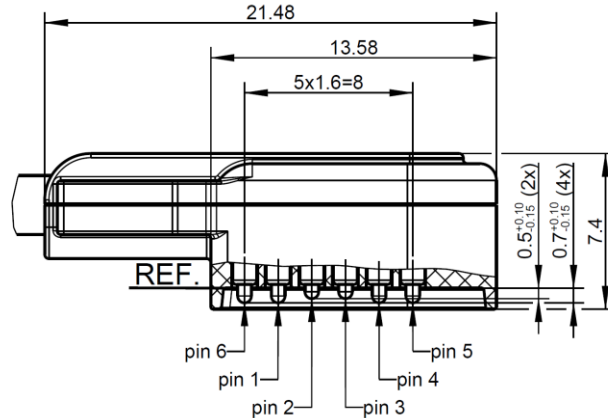

All dimensions are in mm; tolerances according to ISO 2768 C

Interface

Mating with

MultiMag 6 Receptacle

Material and Plating break-off plug

Connector parts

Housing bottom and top
Magnets

Material
PC+ABS
NdFeB

Plating / Color

White, similar RAL 9010
Nickel plated

Spring loaded contacts

Piston
Ferrule
Spring

Material

Brass
Brass
Stainless steel wire

Plating / Color

Gold plated
Gold plated

Connectors

USB-A

According to USB 2.0 specification


Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

RF_35/09.14/6.2

Cable

USB 2.0 cable

According to USB 2.0 specification

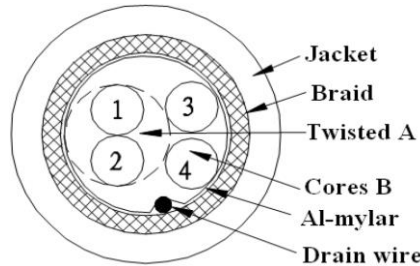

Twisted pair (1, 2)

Stranded tinned copper wire with PE insulation

2x
28 AWG, Ø 0.40 mm
Ø 0.80 mm, green and white

Wire (3, 4)

Stranded tinned copper wire with PVC insulation

2x
28 AWG, Ø 0.40 mm
Ø 0.80 mm, black and red

Drain wire

Tinned copper

1x
Ø 0.127 mm

Foil coverage

Al mylar

Braid shield

Tinned copper

Jacket

TPE

Ø 3.40 mm

Electrical Data

Designed for USB 2.0 specification

5 V DC, 0.5 A

Maximum voltage

24 V DC

Maximum current

1 A

Mechanical Data

Magnetic disengagement force

average ~ 8 N

Mating cycles without load

min. 5.000

Expected Mating cycles with load:

Max. Voltage	Max. Current	Mating cycles
5.0 V DC	0.5 A	min. 5.000
12.6 V DC	1.0 A	min. 2.000
24.0 V DC	0.5 A	min. 800

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

RF_35/09.14/6.2

MultiMag 6

Cable Assembly

L99-A0039-XXX

Environmental Data

Temperature range -20 °C to +60 °C
Magnets start losing their magnetic properties above 65 °C

Compliance

RoHS compliant



Packing

Standard 1 pc in plastic bag, 100 bags in box
Weight Depending on cable length

Caution!

Magnets can impact the function of pace makers and implantable cardioverter-defibrillators (e.g. actuation of reed switch). Keep a minimum distance of 0.2 m (20 cm) between the magnetic connector and the implanted devices to prevent malfunction and danger to health.

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
M. Portenkirchner	23.01.15	T. Scheuerlein	25.07.17	a02	17-0004	M. Margardt	25.07.17

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel. : +49 8684 18-0
Email : info@rosenberger.de

Page
4 / 4